


## Digital Radiocommunication Testers CMD50/52, CMD53/55, CMD65

**Multimode compact testers for digital mobile phones to GSM 900/1800/1900 and DECT standard**

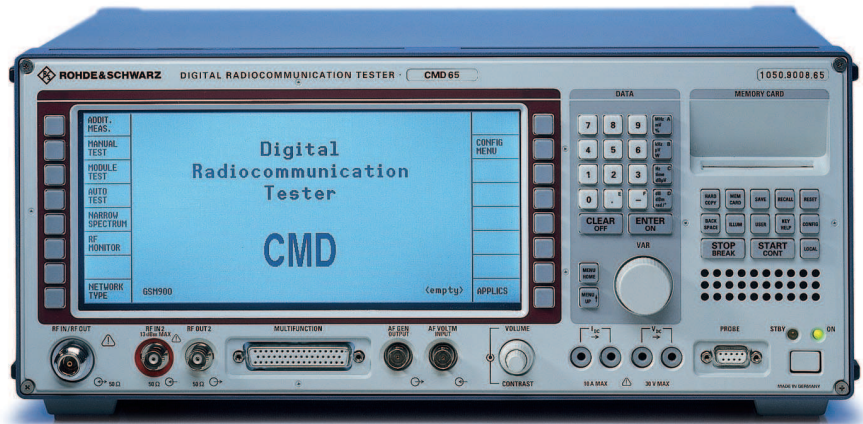

CMD65 (photo 40882-1)

### Brief description

CMD 50/52 is a compact unit for testing GSM mobiles. CMD 53/55 is furthermore capable of testing GSM1800 mobile phones. The CMD65 combines the functionality of CMD55 and that of CMD60 (see page 36). CMD53/55 can optional be extended to include the DECT standard. All models can optionally be extended to include the GSM1900 standard.

All models combine small dimensions with high measurement accuracy and speed. The testers' range of capabilities includes all signalling, generator and measurement functions required for verifying the correct operation of the DUT. Thanks to their fast go/nogo tests and accurate analysis using optional extensions, CMD52 and 55 are equally suited for use in service and production.

For use in service and maintenance, models CMD50 and CMD53, which are based on CMD52 and CMD55 but have a reduced number of facilities, are available.

### Main differences of CMD52/53 to CMD52/55

- Remote control via RS-232 only (no IEC/IEEE bus)
- No multifunction connector on front panel
- Speech coder/decoder cannot be integrated
- Optional ammeter and voltmeter
- High-sensitivity 2nd RF input available as an option

### Operation

Operation of the CMD is extremely user-friendly and requires no detailed GSM knowledge. The high-contrast, backlit LCD provided with softkeys on both sides allows convenient callup of test routines under menu control.

### Remote control

- CMD controlled via RS-232 or IEC/IEEE-bus interface uses SCPI-compatible commands
- Designed for fast speed to yield high throughputs in production

### Autotest

The autotest function enables complete measurement routines to be started at a keystroke.

### Test capabilities

To test mobile phones, the CMD simulates a GSM base station. Two RF synthesizers, one of which delivers a continuous BCCH signal, are available for this purpose. The major test functions are:

- mobile-to-base station synchronization
- location update
- incoming call setup
- outgoing call setup
- mobile power level control
- handover (channel change, time-slot change)
- dual-band handover
- peak power measurement
- SACCH measurement (eg RxLev, RxQual, power level)
- echo test
- call clearing by mobile
- call clearing by network
- DC current/voltage measurement
- phase and frequency error measurement (option CMD-B4)
- measurement of power ramp as a function of time (option CMD-B4)
- bit-error rate (BER) measurement (option CMD-B4)

## Digital Radiocommunication Testers CMD50/52, CMD53/55, CMD65

### Echo test

The echo test allows very rapid go/nogo analysis covering all essential parts of the mobile including microphone and loudspeaker.

### Voltage and power measurements

The DC ammeter/voltmeter designed for pulsed signals allows correct measurement of the power consumption of the mobile phone.


urement of the power consumption of the mobile phone.

### Module test


Fault localization in mobile telephones requires various measurement functions that can also be used without signalling so that defective units can be tested down to module level. The basic model of CMD already provides some of these functions, other functions are available as optional extensions:

model of CMD already provides some of these functions, other functions are available as optional extensions:


- power measurement
- signal generation
- phase and frequency error measurement
- measurement of power ramp

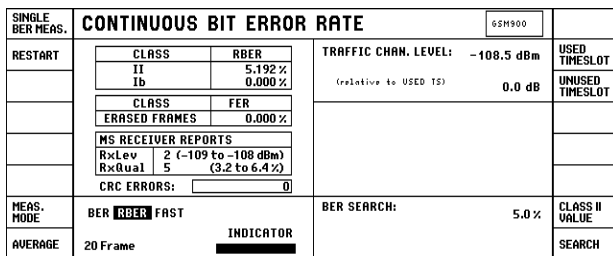


The BER search function allows the absolute sensitivity of a mobile to be determined

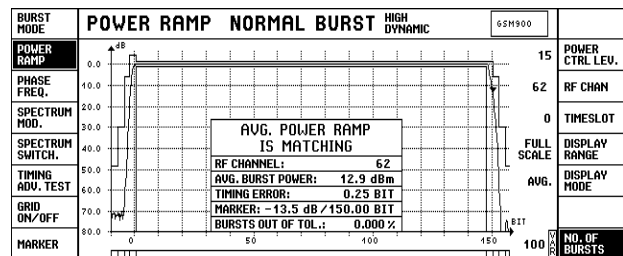


The full dynamic range (>72 dB) of a GSM normal and access burst can be verified with the CMD-B42 option

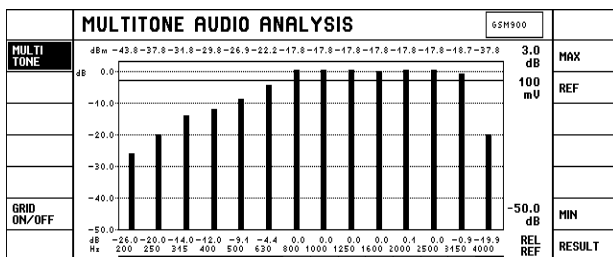


The audio measurement option CMD-B44 is capable of generating and analyzing up to 14 freely configurable tones in about 1 second. Measurements in absolute and relative mode are possible

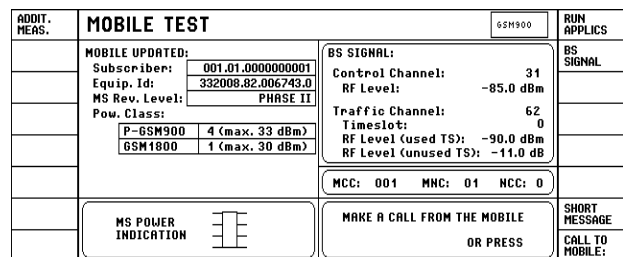

After location update, it is indicated whether a mobile is a dual-band version. For realistic simulation of the real networks, the CMD-U20 offers the option to have the BCCH present in either band during dual-band simulation

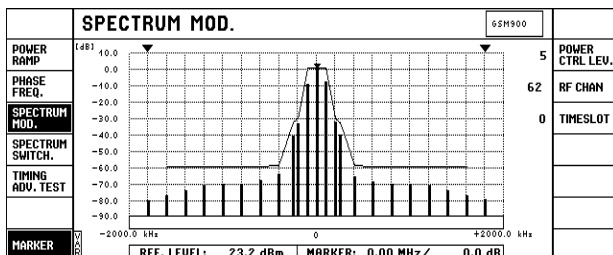

Option CMD-B43 provides measurements of spectrum due to modulation and switching according to GSM recommendations

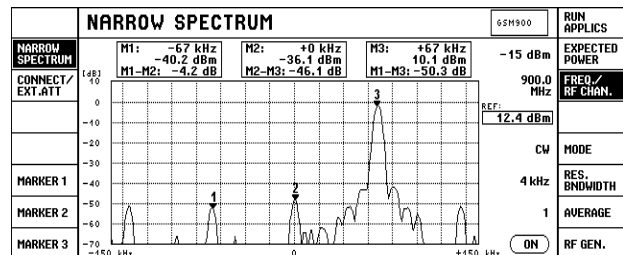

The narrowband spectrum analyzer option CMD-K43 is used to determine the I/Q modulator balance by measuring the suppressed carrier and sidebands

## Digital Radiocommunication Testers CMD50/52, CMD53/55, CMD65

### Overview of applications and options

|       | GSM900 | GSM1800 | GSM1900           | DECT              | RS232 | IEEE-bus | V/I meas. | Service | Production |
|-------|--------|---------|-------------------|-------------------|-------|----------|-----------|---------|------------|
| CMD50 | •      | CMD-U1  | CMD-U1<br>CMD-B19 | CMD-U1<br>CMD-U56 | •     | –        | CMD-B20   | •       | –          |
| CMD52 | •      | CMD-U1  | CMD-U1<br>CMD-B19 | CMD-U1<br>CMD-U56 | •     | •        | •         | •       | •          |
| CMD53 | •      | •       | CMD-B19           | CMD-U56           | •     | –        | CMD-B20   | •       | –          |
| CMD55 | •      | •       | CMD-B19           | CMD-U56           | •     | •        | •         | •       | •          |
| CMD65 | •      | •       | CMD-B19           | •                 | •     | •        | •         | •       | •          |

| Designation, functions   | Option  | Order No.    |
|--|---------|--------------|
| <b>GSM 1900 mobile station test (for CMD53/55 and CMD65 only)</b>  | CMD-B19 | 1059.6201.02 |
| <b>OCXO Reference Oscillator:</b> frequency drift $\leq 1 \times 10^{-7}$  | CMD-B1  | 1059.6002.02 |
| <b>Reference Frequency Inputs/Outputs:</b> synchronization to internal or external frequency (2.048, 10, 13.26, 52 MHz) or GSM bit clock (270.8 kHz) 1 to 13 MHz, input signal min. 0 dBm, max. TTL signal | CMD-B3  | 1051.6202.02 |
| <b>Fast Power Ramp, Phase/Frequency Error and BER Measurement:</b> numeric/graphic display, various BER, RBER, FER test routines; required for fitting CMD-B41 and CMD-B42                                 | CMD-B4  | 1051.6654.02 |
| <b>AF Measurement Unit with Frequency Counter:</b> comprises AF generator, voltmeter, distortion meter and frequency counter, measurements up to 60 MHz  | CMD-B41 | 1051.6902.02 |
| <b>High-Dynamic Burst Analysis:</b> dynamic range >72 dB (CMD-B4 required)   | CMD-B42 | 1051.7150.02 |
| <b>GSM900/1800/1900-Specific Measurement</b> of spectra due to switching/modulation (CMD-B4 and CMD-B42 required)  | CMD-B43 | 1059.6001.02 |
| <b>Multitone Generator and Analyzer</b> for CMD5x and CMD6x: comprehensive audio tests up to 8460 Hz (CMD-B4 and CMD-B41 required)   | CMD-B44 | 1099.3203.02 |
| <b>Realtime Speech Encoder/Decoder</b>   | CMD-B5  | 1051.8657.02 |
| <b>TDMA Signals and Adapter for CMD-B6x Options:</b> required for fitting CMD-B61 and CMD-B62  | CMD-B6  | 1051.7409.02 |
| <b>IEC/IEEE-Bus Interface:</b> alternative for RS-232 interface (standard, CMD-B6 required)  | CMD-B61 | 1051.7609.02 |
| <b>Memory Card Interface:</b> archiving of results, etc. (CMD-B6 required)   | CMD-B62 | 1051.8205.02 |
| <b>I/Q Demodulator Output and Trigger Input</b> (BNC connector on the rear panel)  | CMD-U5  | 1059.6901.02 |
| <b>I/Q Demodulator Output and Trigger Input for Fading Simulation</b>  | CMD-B17 | 1099.3003.02 |
| <b>Modification Kit for upgrading CMD50/52 to CMD53/55</b>   | CMD-U1  | 1051.8957.02 |
| <b>DECT Extension for CMD53/55</b>   | CMD-U56 | 1051.8004.02 |
| <b>Narrowband RF Spectrum Analyzer</b> (CMD-B4 required)   | CMD-K43 | 1082.4830.02 |
| <b>Extra Frequency Range for R-GSM, International Railway System (UIC)</b>   | CMD-K80 | 1082.4930.02 |
| <b>Modification Kit for CMD53/65:</b> dual-band handover with BCCH present; for CMD53 only with CMD-U10  | CMD-U20 | 1099.5606.02 |

### Specifications in brief

For CMD65 see also CMD60, page 36

**Timebase TCXO standard, 10 MHz**

Frequency drift (0 to +35°C)  $\leq 1.5 \times 10^{-6}$   
 Aging  $\leq 0.5 \times 10^{-6}$ /year (at 35 °C)

**Timebase OCXO**

Nominal frequency with option CMD-B1, 10 MHz  
 10 MHz

Frequency drift (0 to +50°C)  $\leq 1 \times 10^{-7}$   
 Aging  $\leq 2 \times 10^{-7}$ /year

**DC voltmeter**  
 Resolution/accuracy 0 to ±30 V  
 10 mV/2%

**DC ammeter**  
 current averaging with GSM-adapted time constant, current peak measurement (positive and negative)

Measurement range 0 to ±10 A  
 Resolution/accuracy 10 mA/2%

## Digital Radiocommunication Testers CMD50/52, CMD53/55, CMD65

### Specific data of CMD52

|  |  |
|--|--|
| <b>RF generator 1</b>                            |  |
| Frequency range                                  | 935.2 to 959.8 MHz (GSM channel spacing)                 |
| Frequency settling time                          | ≤3 ms for phase error <2°                                |
| Output level (RF IN/OUT)                         | -33 to -120 dBm  |
| Output level (RF OUT 2)                          | +13 to -77 dBm   |
| Resolution                                       | 0.1 dB   |
| Harmonics (RF IN/OUT)                            | <-30 dBc   |
| Modulation                                       | GMSK, B × T = 0.3  |
| <b>RF generator 2</b>                            |  |
| Output level (RF IN/OUT)                         | same as RF generator 1, but -35 dBm (RF OUT 2: +11 dBm)  |
| <b>Peak power meter (RF IN/OUT)</b>              |  |
| Frequency range                                  | 800 to 1000 MHz  |
| Measurement range/resolution                     | 10 to 47 dBm/0.1 dB                                      |
| VSWR   | ≤1.3   |
| <b>GSM phase and frequency error measurement</b> |  |
| Frequency range                                  | with option CMD-B4<br>890.2 to 914.8 MHz (GSM900 band)   |
| Level range (RF IN/OUT)                          | 10 to 47 dBm (RF IN 2: -60 to 0 dBm)                     |
| <b>GSM burst power measurement</b>               |  |
| Frequency range                                  | with option CMD-B4<br>890.2 to 914.8 MHz (GSM900 band)   |
| Reference level range (RF IN/OUT)                | 10 to 47 dBm (RF IN 2: -37 to 0 dBm)                     |
| <b>High-dynamic burst analysis</b>               |  |
| Relative error of individual test sample         | with option CMD-B42<br>≤1.5 dB to 72 dB below peak power |
| Dynamic range                                    | >72 dB   |
| Measurement limit (RF IN/OUT)                    | <-36 dBm (RF IN 2: <-83 dBm)                             |

### Specific data of CMD55

|  |  |
|--|--|
| <b>RF generator 1</b>                        |  |
| Frequency range                              | same as CMD52, but<br>GSM900 band 935.2 to 959.8 MHz<br>GSM1800 band 1805.2 to 1879.8 MHz<br>GSM1900 band 1930.2 to 1989.8 MHz |
| Output level                                 | RF IN/OUT<br>OUT2<br>-35 to -120 dBm<br>+11 to -77 dBm   |
| <b>RF generator 2</b>                        |  |
| Max. output level (RF IN/OUT)                | same as RF generator 1, but<br>-37 dBm (RF OUT 2: +9 dBm)  |
| <b>Peak power meter (RF IN/OUT)</b>          |  |
| Frequency range                              | 800 to 1000 MHz<br>1700 to 1900 MHz  |
| Measurement range/resolution                 | GSM900 band 0 to 47 dBm/0.1 dB<br>GSM1800/1900 0 to 33 dBm/0.1 dB  |
| VSWR   | ≤1.3   |
| <b>Phase and frequency error measurement</b> |  |
| Frequency range                              | with option CMD-B4<br>GSM900 band 890.2 to 914.8 MHz<br>GSM1800 band 1710.2 to 1784.8 MHz<br>GSM1900 band 1850.2 to 1909.8 MHz |
| Level range                                  |  |
| RF IN/OUT                                    | GSM900 band 0 to 47 dBm<br>GSM1800/1900 0 to 33 dBm  |
| RF IN 2                                      | -60 to 0 dBm   |
| <b>Burst power measurement</b>               |  |
| Frequency range                              | with option CMD-B4<br>GSM900 band 890.2 to 914.8 MHz   |
| Frequency range                              | GSM1800 band 1717.2 to 1784.8 MHz<br>GSM1900 band 1850.2 to 1909.8 MHz   |
| Reference level range                        |  |
| RF IN/OUT                                    | GSM900 band 10 to 47 dBm<br>GSM1800/1900 0 to 33 dBm   |
| RF IN 2                                      | -37 to 0 dBm   |

|                                    |              |                     |
|------------------------------------|--------------|---------------------|
| <b>High-dynamic burst analysis</b> |              | with option CMD-B42 |
| Dynamic range                      |              | >72 dB              |
| Measurement limit                  |              |                     |
| RF IN/OUT)                         | GSM900 band  | <-36 dBm            |
|                                    | GSM1800/1900 | <-48 dBm            |
| RF IN 2                            | GSM900 band  | <-83 dBm            |
|                                    | GSM1800/1900 | <-85 dBm            |

### AF Measurement Unit

option CMD-B41

|                            |                                    |
|----------------------------|------------------------------------|
| <b>AF generator</b>        |                                    |
| Frequency range/resolution | 50 Hz to 10 kHz/0.1 Hz             |
| Frequency drift            | same as timebase + half resolution |
| Voltage range/resolution   | 10 μV to 5 V/10 μV (1%)            |
| Distortion                 | ≤0.5%                              |

|                              |                            |
|------------------------------|----------------------------|
| <b>AF volimeter</b>          |                            |
| Frequency range              | 50 Hz to 10 kHz            |
| Measurement range/resolution | 0.1 mV to 30 V/100 μV (1%) |

|                                |                     |
|--------------------------------|---------------------|
| <b>Distortion meter</b>        |                     |
| Frequency range                | 300 Hz to 3 kHz     |
| Input voltage range/resolution | 100 mV to 30 V/0.1% |
| Inherent distortion            | ≤0.5%               |

|                            |                       |
|----------------------------|-----------------------|
| <b>AF counter</b>          |                       |
| Frequency range/resolution | 20 Hz to 10 kHz/≤1 Hz |
| Input voltage range        | 10 mV to 30 V         |

|                            |                                |
|----------------------------|--------------------------------|
| <b>IF counter</b>          |                                |
| Frequency range/resolution | 10 kHz to 60 MHz/1 Hz          |
| Input signal               | min.: 100 mV; max.: TTL signal |

### Interfaces

|                               |  |
|-------------------------------|--|
| <b>IEC/IEEE-Bus Interface</b> | option CMD-B61<br>IEC625-1 (IEEE 488), SCPI-compatible |
|-------------------------------|--|

|                         |                      |
|-------------------------|----------------------|
| <b>Other interfaces</b> | RS-232-C, Centronics |
|-------------------------|----------------------|

|   |  |               |
|---|--|---------------|
| <b>Reference Frequency Inputs/Outputs</b> |  | option CMD-B3 |
| Synchronization input                     |  |               |
| Frequency (selectable)                    | GSM bit clock (270.8 kHz), 2xGSM bit clock, 4xGSM bit clock, 16xGSM bit clock, 1 to 13 MHz in 1 MHz steps, 2.048 MHz, 26, 39, 52 MHz |               |
| Input signal                              | min.: 0 dBm; max.: TTL signal  |               |
| Synchronization output 1                  |  |               |
| Frequency                                 | 10 MHz with internal reference or frequency at synchronization input with external frequency   |               |
| Input signal                              | TTL signal, Z <sub>out</sub> = 50 Ω  |               |
| Synchronization output 2                  |  |               |
| Frequency (selectable)                    | GSM bit clock, 2x, 4x, 16x GSM bit clock, 1, 2, 4 or 13 MHz  |               |
| Input signal                              | TTL signal, Z <sub>out</sub> = 50 Ω  |               |

### Ordering information

|                                 |         |              |
|---------------------------------|---------|--------------|
| <b>Mobile Station Tester</b>    |         |              |
| GSM900                          | CMD 50  | 1050.9008.50 |
| GSM900                          | CMD 52  | 1050.9008.52 |
| GSM900 and GSM1800              | CMD 53  | 1050.9008.53 |
| GSM900 and GSM1800              | CMD 55  | 1050.9008.55 |
| GSM900, GSM1800 and DECT        | CMD 65  | 1050.9008.65 |
| For all models GSM1900 optional | CMD-B19 | 1059.6201.02 |