

300 Watt, 1/4 Rackmount and Benchtop High Density Power Supplies

The HPD Series (High Power Density) 300W programmable power supplies are designed for system, benchtop, ATE and other instrument-controlled applications. The series offers a full 300 watts in a 1/4 rackwide package. HPDs feature programmable output voltage and current plus low output ripple and noise. The units meet FCC class A requirements for reduced EMI. HPDs can be used individually or can be combined in an optional 19" rack adapter to achieve single, dual, triple or quad outputs.



Features

◆ **Voltage**

- Three standard models in adjustable voltage and current ranges: 0-15V, 0-20A; 0-30V, 0-10A; and 0-60V, 0-5A
- High resolution 10-turn potentiometer provides precise output voltage control

◆ **Modular Design**

Single units may be rack mounted alone or configured with XT series

◆ **Input**

115 VAC, 47-63 Hz, single phase input standard, 230 VAC input available (Option M2)

◆ **Displays**

- Simultaneous digital displays of voltage and current on large, easy to read LEDs
- Unique twin LED bar graphs show voltage and current levels proportional to supply output

◆ **Protection and Safety**

- Overvoltage protection
- Short circuit proof outputs
- Current limit

◆ **Regulation**

0.01% + 2 mV line and load regulation

◆ **Transient Response**

<500 μs transient response with ±50% load change (typical)

◆ **Remote Programming**

- Remote programming and monitoring of output voltage and/or current, OVP, remote on/off, master/slave tracking (Option M5A)
- Internal IEEE-488 Interface Card with voltage/current readback and adjustable OVP (Option M9B)

◆ **CE Mark**

◆ **5 Year Warranty**



HPD - Specifications

OUTPUT

Voltage and Current

| Model | Voltage | Current |
|-----------|---------|---------|
| HPD 15-20 | 0-15 | 0-20 |
| HPD 30-10 | 0-30 | 0-10 |
| HPD 60-5 | 0-60 | 0-5 |

Constant Voltage Mode

Ripple and Noise: 5 mV RMS and 100 mV p-p max.

Regulation

Line: 0.01% of V max. + 2 mV

Load: 0.01% of V max. + 2 mV

Transient Response: Typically recovers in <500 μ s to within 0.05% of steady-state output voltage. \pm 50% load change in the range of 25 to 100% of rated load

Stability: 0.02% of maximum voltage over 8 hours after 60 minute warm up time at fixed line, load and temperature

Temperature Coefficient: 0.015%/°C of maximum output voltage

Constant Current Mode

Regulation:

Line: 0.01% of I max. + 1 mA

Load: 0.01% of I max. + 1 mA

Temperature Coefficient: 0.02%/°C of maximum output current

Stability: 0.03% of maximum current over 8 hours after 60 minute warm up time of fixed line, load and temperature

INPUT

Voltage and Frequency: 115 VAC single phase \pm 10%, 47-63 Hz, or optional 200 to 250 VAC (M2)

Current: 6

GENERAL

Operating Temperature:
0 to 50°C (derated above 30°C)

Storage Temperature: -55°C to 85°C

Cooling: By convection

Efficiency: 80%

Series Operation: Consult Sorensen

Parallel Operation: Consult Sorensen

Overvoltage Protection: Available with Options M5A and M9B

Overload Short-Circuit Protection:
Standard, switches to current mode operation while in short circuit

Output to Chassis Isolation: 400 VDC

Voltage Resolution: Standard 0.02%, IEEE-488

Meter Accuracy: 1% of full scale + 1 count

Voltage Programming: Zero to full scale output linearly proportioned to a 0-10V or 0-10 k Ω (Option M5A)

Current Programming: Zero to full scale output linearly proportioned to 0-10V or 0-10 k Ω (Option M5A)

Remote Sensing: Compensation for maximum line drop of 0.5V (per output line)

Rear Access Connector: Option M5A. D subminiature 25 pin female. Option M9B IEEE-488 connector (mating connector not supplied)

Regulatory Compliance: CE Mark

Dimensions: 3U or 5.25" (133 mm) H x 4.25" (108 mm) W x 11.50" (292 mm) D

Weight: 7.7 lbs. (3.5 kg)

Shipping Weight: 9 lbs. (4 kg)

OPTIONS & ACCESSORIES

M2 Input Voltage: 200-250 VAC, single phase, 47-63 Hz

M5A Analog Programming: Internal interface for full scale remote programming of output voltage and/or current by a 0-10V or 0-10 k Ω external source connected at the rear panel. Includes 0-10V readback, externally adjustable overvoltage protection (OVP), TTL shutdown with selectable logic, master/slave tracking and status signals for programming mode, operating mode, OVP and output fail flag (May not be combined with M9B)

M9B Internal IEEE-488 Interface: Features complete remote programming, including status reporting, settings query and interrupt generation with user-designated fault conditions. Both the voltage and current output are precisely programmed directly in volts and amps. See page 49 for more information (May not be combined with M5A)

M11: 10-turn current control potentiometer

M13: Locking shafts (front panel potentiometers)

M15: Front panel binding posts

M18: Carrying handle

Rack Adapter Kit: Specify RM-XHS


HPD - Data Table

| Model | Output Power | | | | Constant Voltage Mode | | | | Temp. Coeff., Voltage %/°C | Voltage Drift % (Typ.) | Programming Constants Voltage Mode ¹ | |
|-----------|---------------|---------------|------|------|-----------------------------|-----------------|--------------|---------------------------------|----------------------------|------------------------|---|-----|
| | Voltage (VDC) | Current (ADC) | | | Regulation Line and Load mV | Ripple (RMS) mV | Resolution % | Transient Response Time μ s | | | Ohms/V | V/V |
| | | 30°C | 40°C | 50°C | | | | | | | | |
| HPD 15-20 | 0-15 | 20 | 15 | 10 | 7 | 5 | 0.02 | <500 | 0.015 | 0.02 | 667 | 1.5 |
| HPD 30-10 | 0-30 | 10 | 7.5 | 5 | 10 | 5 | 0.02 | <500 | 0.015 | 0.02 | 333 | 3.0 |
| HPD 60-5 | 0-60 | 5 | 3.75 | 2.5 | 16 | 5 | 0.02 | <500 | 0.015 | 0.02 | 167 | 6.0 |

| Model | Constant Current Mode | | Temp. Coeff., Current %/°C (Typ.) | Current Drift % (Typ.) | Programming Constants Current Mode ¹ | | Standard Input Power (Single Phase, 47-63 Hz) | | Efficiency % (Typ.) |
|-----------|-----------------------------|-----------------|-----------------------------------|------------------------|---|-----|---|----------------------|---------------------|
| | Regulation Line and Load mA | Ripple (RMS) mA | | | Ohms/A | V/A | VAC \pm 10% | Current A RMS (Max.) | |
| | | | | | | | | | |
| HPD 15-20 | 6 | 5 | 0.02 | 0.03 | 500 | 2.0 | 115 | 6 | 80 |
| HPD 30-10 | 4 | 5 | 0.02 | 0.03 | 1000 | 1.0 | 115 | 6 | 80 |
| HPD 60-5 | 3 | 5 | 0.02 | 0.03 | 2000 | 0.5 | 115 | 6 | 80 |

Note: 1. Requires M5A option

HPD - Case and Options

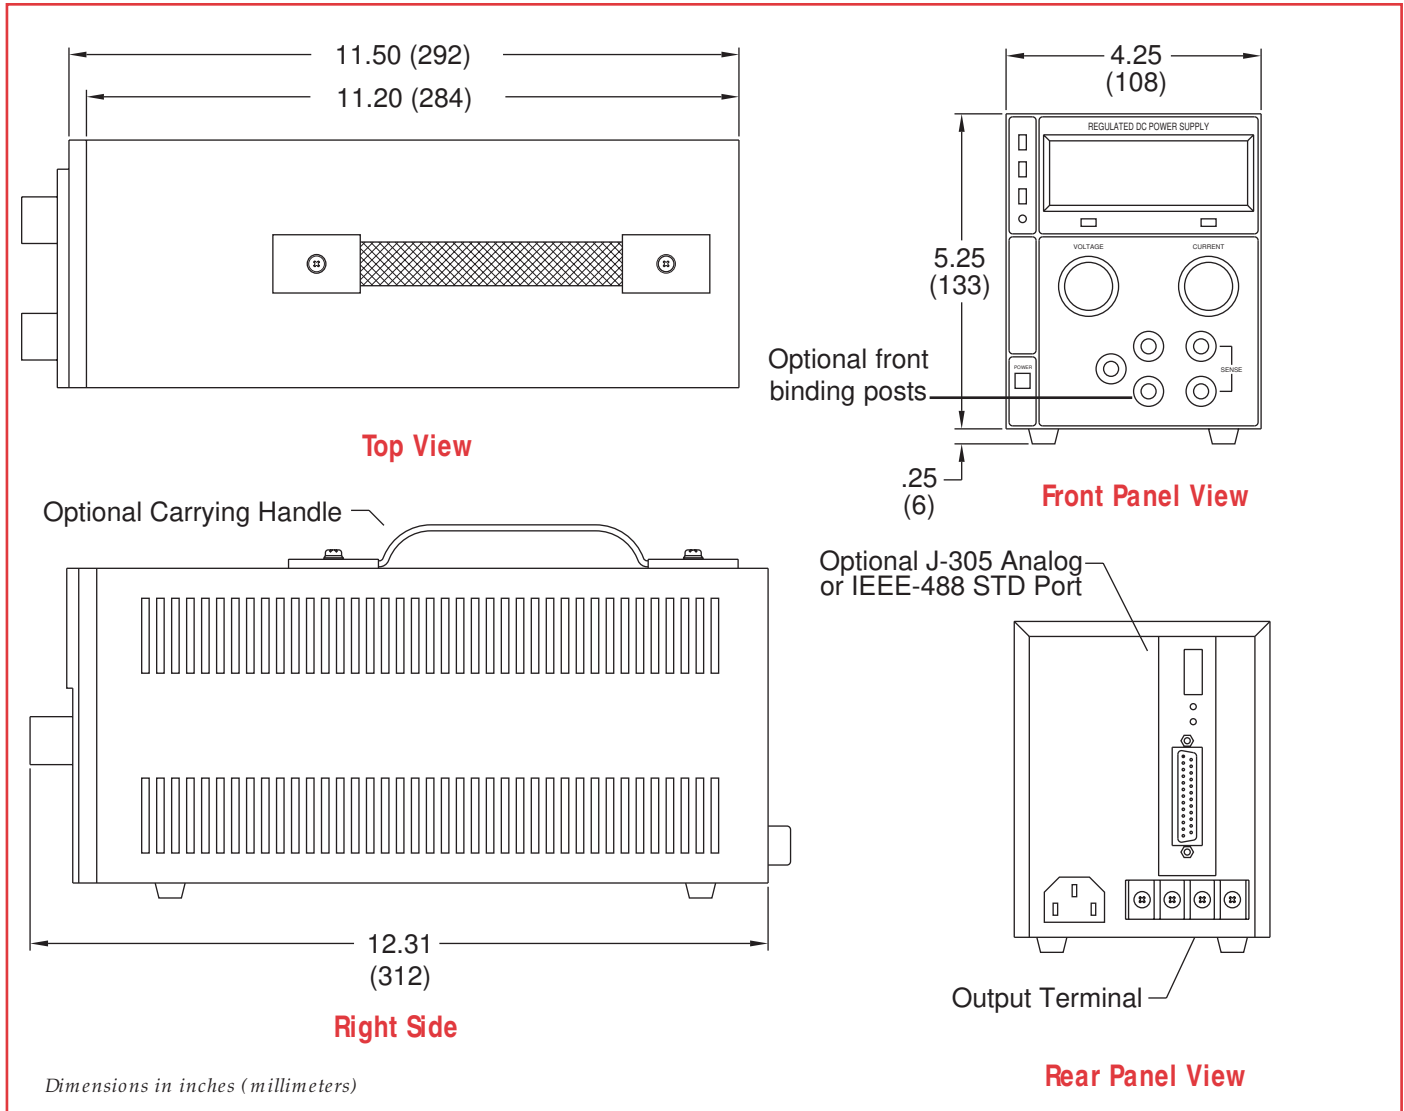

M5A • J-305 Pin Assignments

| Pin | Identification | Pin | Identification |
|-----|--------------------------------------|-----|--------------------------------|
| 1 | Overvoltage Protection Flag | 14 | Not Used |
| 2 | TTL Shutdown Return | 15 | TTL Shutdown |
| 3 | Not Used | 16 | Current Limit Program |
| 4 | Program Return | 17 | Voltage Program |
| 5 | Program Return | 18 | Current Readback |
| 6 | Auxiliary Ground | 19 | Voltage Readback |
| 7 | Remote Voltage Program Select* | 20 | +10V Reference Out (10 mA max) |
| 8 | Remote Current ProgramSelect* | 21 | Output Fail Flag* |
| 9 | Voltage Current Limit Mode Indicator | 22 | + Sense |
| 10 | + Out | 23 | + Out |
| 11 | + Out | 24 | - Return |
| 12 | - Return | 25 | - Return Sense |
| 13 | - Return | | |