



## MXG X-Series Signal Generators N5181B Analog & N5182B Vector 9 kHz to 3 or 6 GHz

Data Sheet

*Anticipate — Accelerate — Achieve*



**Agilent Technologies**

# Table of Contents

## Pure and precise

On the path to better performance, the new MXG X-Series signal generators are fine-tuned to be your “golden transmitter” in R&D. Whether you’re pushing for a linear RF chain or an optimized link budget, the analog and vector MXG models deliver what you need: phase noise, ACPR, channel coding, and more. Take your devices and designs to the limit with the MXG.

|  |    |
|--|----|
| Definitions and conditions . . . . .                     | 3  |
| Frequency specifications . . . . .                       | 4  |
| Amplitude specifications . . . . .                       | 6  |
| Spectral purity specifications . . . . .                 | 11 |
| Analog modulation specifications . . . . .               | 14 |
| Vector modulation specifications - N5182B only . . . . . | 18 |
| General specifications . . . . .                         | 28 |
| Inputs and outputs . . . . .                             | 30 |
| Related literature . . . . .                             | 32 |

# Definitions and Conditions

Specifications describe the performance of parameters covered by the product warranty and apply to the full temperature range of 0 to 55 °C, unless otherwise noted.

Typical describes additional product performance information that is not covered by the product warranty. It is performance beyond specifications that 80 percent of the units exhibit with a 95 percent confidence level over the temperature range 20 to 30 °C. Typical performance does not include measurement uncertainty.

Nominal values indicate expected performance, or describe product performance that is useful in the application of the product, but are not covered by the product warranty.

Measured describes an attribute measured during the design phase for purposes of communicating expected performance, such as amplitude drift vs. time. This data is not warranted and is measured at room temperature (approximately 25 °C).

The generator will meet its specifications when it has been stored at an ambient temperature within the allowed operating range for at least two hours before being turned on or if it had previously been stored at a temperature range inside the allowed storage range, but outside the allowed operating range.

# Frequency Specifications

| Frequency range |  |                |
|-----------------|--|----------------|
| Frequency range | Option 503                             | 9 kHz to 3 GHz |
|                 | Option 506                             | 9 kHz to 6 GHz |
| Resolution      | 0.01 Hz                                |                |
| Phase offset    | Adjustable in nominal 0.1 ° increments |                |

| Frequency bands <sup>1</sup> |      |                        |                       |
|------------------------------|------|------------------------|-----------------------|
|                              | Band | Frequency range        | N                     |
|                              | 1    | 9 kHz to < 5 MHz       | 1 (digital synthesis) |
|                              | 1    | 5 to < 250 MHz         | 1                     |
|                              | 2    | 250 to < 375 MHz       | 0.25                  |
|                              | 3    | 375 to < 750 MHz       | 0.5                   |
|                              | 4    | 750 to < 1500 MHz      | 1                     |
|                              | 5    | 1500 to < 3000.001 MHz | 2                     |
|                              | 6    | 3000.001 to 6000 MHz   | 4                     |

1. N is a factor used to help define certain specifications within the document.

| Frequency switching speed <sup>1,2</sup>   |                 |                         |                     |
|--|-----------------|-------------------------|---------------------|
|  | Standard        | Option UNZ <sup>3</sup> | Option UNZ, typical |
| <b>CW mode</b>                             |                 |                         |                     |
| SCPI mode                                  | ≤ 5 ms, typical | ≤ 1.15 ms               | ≤ 950 μs            |
| List/step sweep mode                       | ≤ 5 ms, typical | ≤ 900 μs                | ≤ 800 μs            |
| <b>Digital modulation on (N5182B only)</b> |                 |                         |                     |
| SCPI mode                                  | ≤ 5 ms, typical | ≤ 1.15 ms               | ≤ 1.05 ms           |
| List/step sweep mode                       | ≤ 5 ms, typical | ≤ 900 μs                | ≤ 800 μs            |

1. Time from receipt of SCPI command or trigger signal to within 0.1 ppm of final frequency or within 100 Hz, whichever is greater, and amplitude settled to within 0.2 dB from 20 to 30 °C. Implies simultaneous frequency and amplitude switching.
2. With internal channel corrections on, the frequency switching speed is < 1.3 ms, measured for list mode and SCPI mode cached frequency points. For the initial frequency point in SCPI mode the time is < 3.3 ms, measured. The instrument will automatically cache the most recently used 1024 frequencies. There is no speed degradation for amplitude-only changes.
3. Specifications apply when status register updates are off.


| Frequency reference   |   |
|---|---|
| <b>Accuracy</b>   | ± aging rate<br>± temperature effects<br>± line voltage effects   |
| Internal time base reference oscillator aging rate <sup>1</sup> | < ± 1 x 10 <sup>-7</sup> /year, nominal<br>< ± 5 x 10 <sup>-10</sup> /day after 30 days, nominal  |
| Adjustment resolution   | < 1 x 10 <sup>-10</sup> , nominal   |
| Temperature effects   | < ± 2 x 10 <sup>-8</sup> from 20 to 30 °C, nominal  |
| Line voltage effects  | < ± 1 x 10 <sup>-9</sup> for ± 10% change   |
| Reference output  |   |
| Frequency   | 10 MHz  |
| Amplitude   | ≥ +4 dBm, nominal into 50 Ω load  |
| External reference input  |   |
| Input frequency, standard                                       | 10 MHz  |
| Input frequency, Option 1ER                                     | 1 to 50 MHz (in multiples of 0.1 Hz)  |
| Lock range  | ± 1 ppm   |
| Amplitude   | 5 dBm ± 2 dB, nominal   |
| Impedance   | 50 Ω, nominal   |
| Waveform  | Sine or square  |
| Sweep modes (frequency and amplitude)                           |   |
| Operating modes   | Step sweep (equally spaced frequency and amplitude or logarithmically spaced frequency steps)<br>List sweep (arbitrary list of frequency and amplitude steps)<br>Simultaneously sweep waveforms with N5182B; see Baseband Generator section for more detail |
| Sweep range   | Within instrument frequency range   |
| Dwell time  | 100 μs to 100 s   |
| Number of points  | 2 to 65535 (step sweep)<br>1 to 3201 (list sweep)   |
| Step change   | Linear or logarithmic   |
| Triggering  | Free run, trigger key, external, timer, bus (GPIB, LAN, USB)  |

1. Aging rate is determined by design as a function of the OCXO.

# Amplitude Specifications

| Output parameters             |   |            |
|-------------------------------|---|------------|
| Settable range                | +30 to -144 dBm                           |            |
| Resolution                    | 0.01 dB, nominal                          |            |
| Step attenuator               | 0 to 130 dB in 5 dB steps electronic type |            |
| Connector                     | Type N 50 Ω, nominal                      |            |
| Max output power <sup>1</sup> |   |            |
| Frequency                     | Standard                                  | Option 1EA |
| 9 kHz to 10 MHz               | +13 dBm                                   | +17 dBm    |
| > 10 MHz to 3 GHz             | +18 dBm                                   | +24 dBm    |
| > 3 to 5 GHz                  | +16 dBm                                   | +19 dBm    |
| > 5 to 6.0 GHz                | +16 dBm                                   | +18 dBm    |

1. Quoted specifications between 20 °C and 30 °C. Maximum output power typically decreases by 0.01 dB/°C for temperatures outside this range.

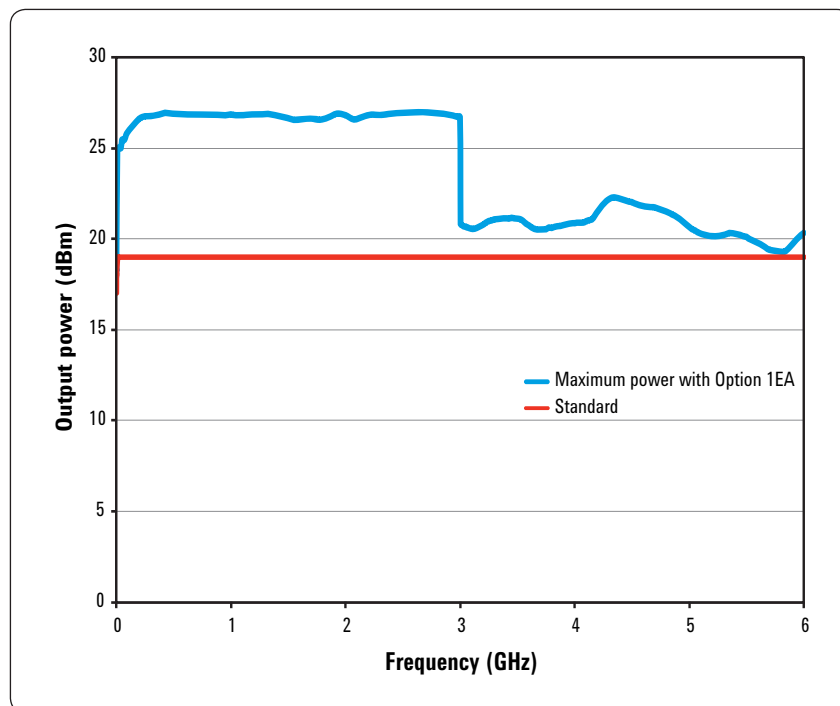

### Absolute level accuracy in CW mode<sup>1</sup> (ALC on)

|                                 | Standard              | Option 1EQ                  |
|---------------------------------|-----------------------|-----------------------------|
| <b>External reference input</b> | <b>+24 to -60 dBm</b> | <b>&lt; -60 to -110 dBm</b> |
| 9 to 100 kHz                    | ± 0.6 dB, typical     | ± 0.9 dB, typical           |
| 100 kHz to 5 MHz                | ± 0.8 dB              | ± 0.9 dB                    |
| > 5 MHz to 3 GHz                | ± 0.6 dB              | ± 1.5 dB (± 0.5, typical)   |
| > 3 to 6 GHz                    | ± 0.6 dB              | ± 1.6 dB (± 0.6, typical)   |

### Absolute level accuracy in CW mode (ALC off, power search run, relative to ALC on)




9 kHz to 6 GHz ± 0.15 dB, typical


### Absolute level accuracy in digital I/Q mode (N5182B only)

(ALC on, relative to CW, W-CDMA 1 DPCH configuration < +10 dBm)


9 kHz to 6 GHz ± 0.25 dB

1. Quoted specifications between 20 °C and 30 °C. For temperatures outside this range, absolute level accuracy degrades by 0.01 dB/°C. Output power may drift up to .003 dB per g/kg change in absolute humidity (nom).

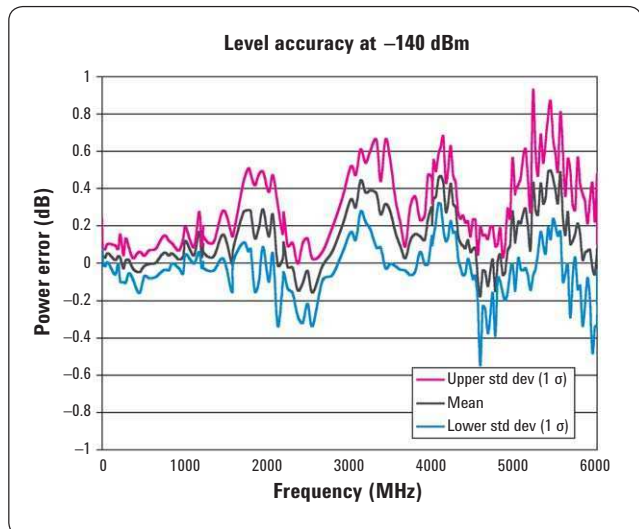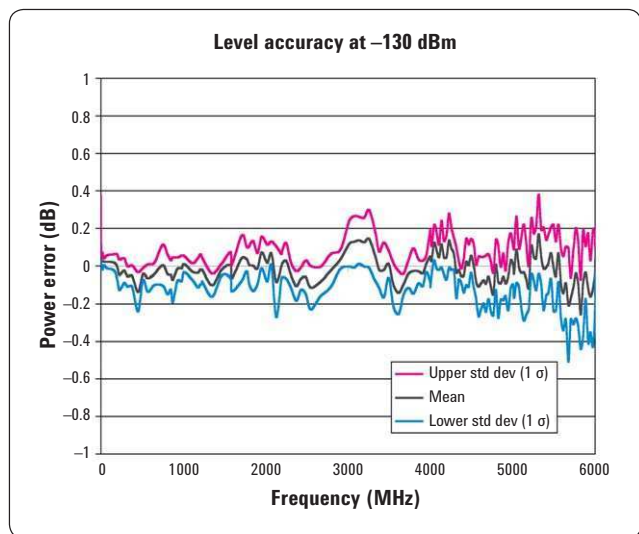
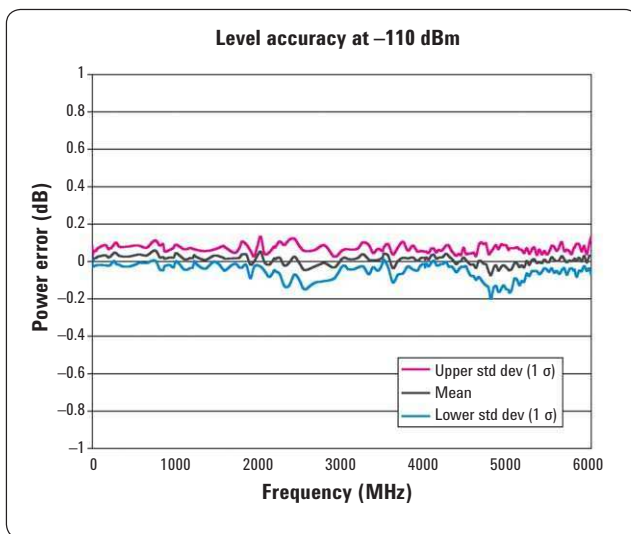


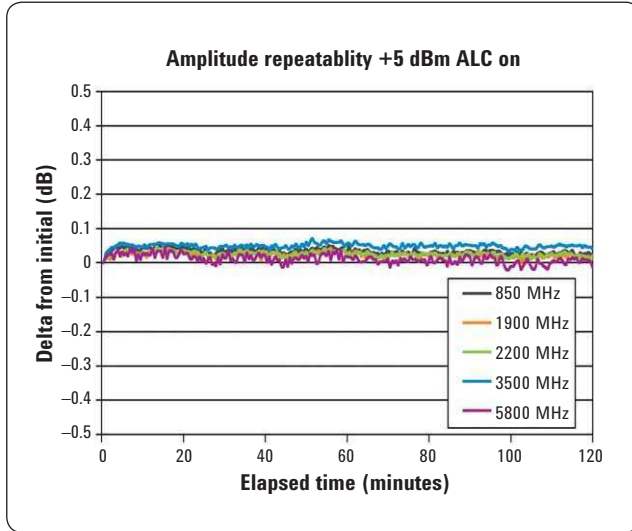

Repeatability measures the ability of the instrument to return to a given power setting after a random excursion to any other frequency and power setting. It should not be confused with absolute level accuracy.

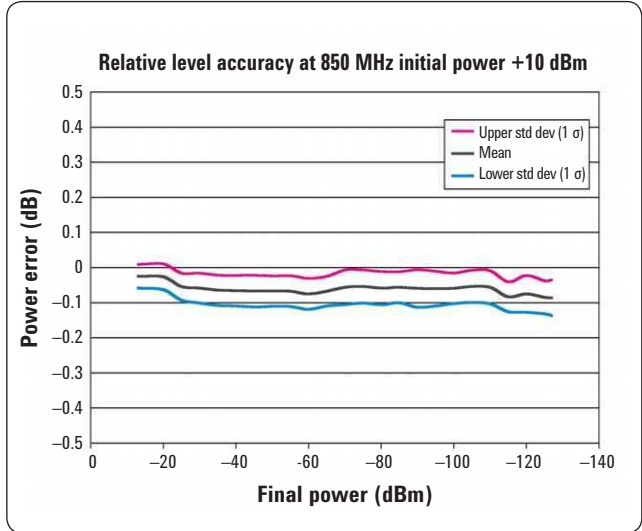



Relative level accuracy measures the accuracy of a step change from any power level to any other power level. This is useful for large changes (such as 5 dB steps).

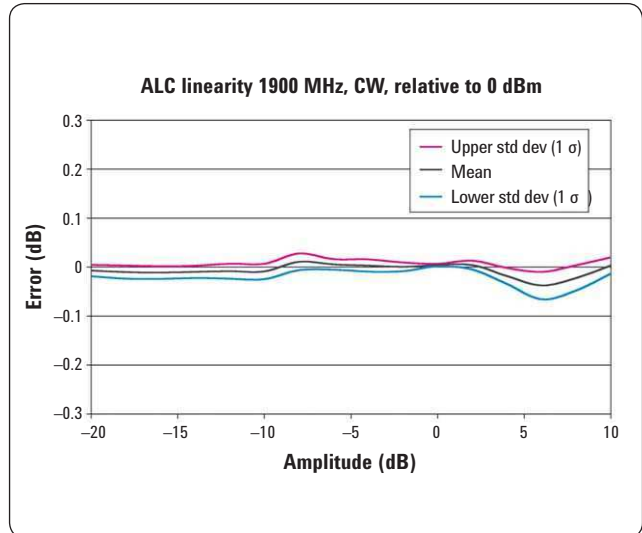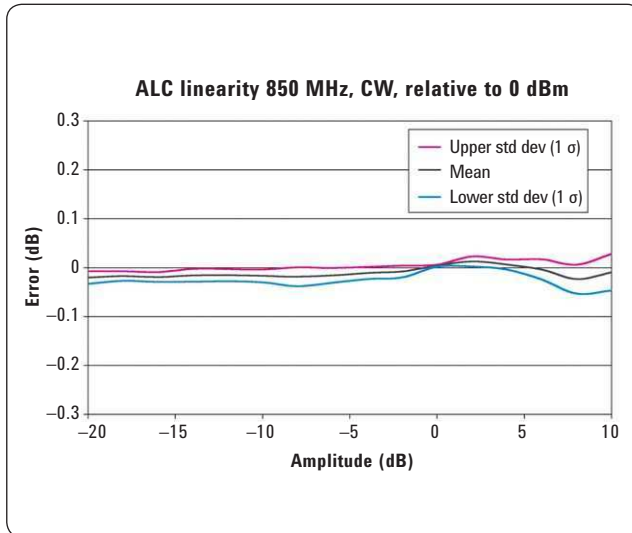



## SWR (measured CW mode)

| Frequency      | Attenuator state |            |               |
|----------------|------------------|------------|---------------|
|                | Bypass           | 0 to 10 dB | 15 dB or more |
| ≤ 1.0 GHz      | < 1.3:1          | < 1.35:1   | < 1.2:1       |
| > 1.0 to 2 GHz | < 1.55:1         | < 1.5:1    | < 1.3:1       |
| > 2 to 3 GHz   | < 1.9:1          | < 1.4:1    | < 1.3:1       |
| > 3 to 4 GHz   | < 1.5:1          | < 1.6:1    | < 1.45:1      |
| > 4 to 6 GHz   | < 1.8:1          | < 1.6:1    | < 1.6:1       |

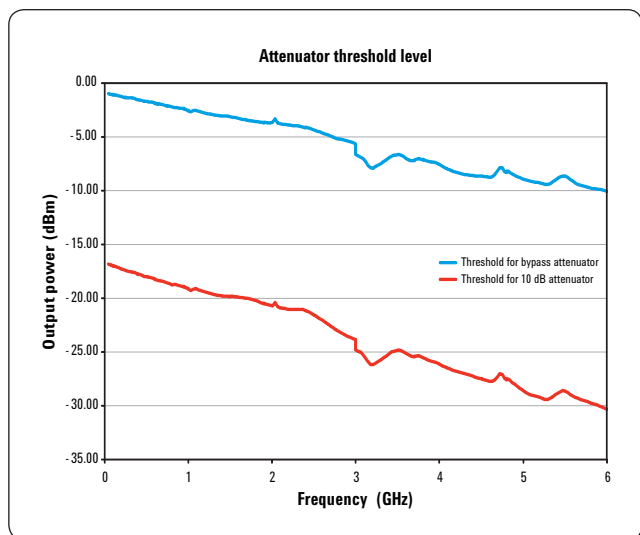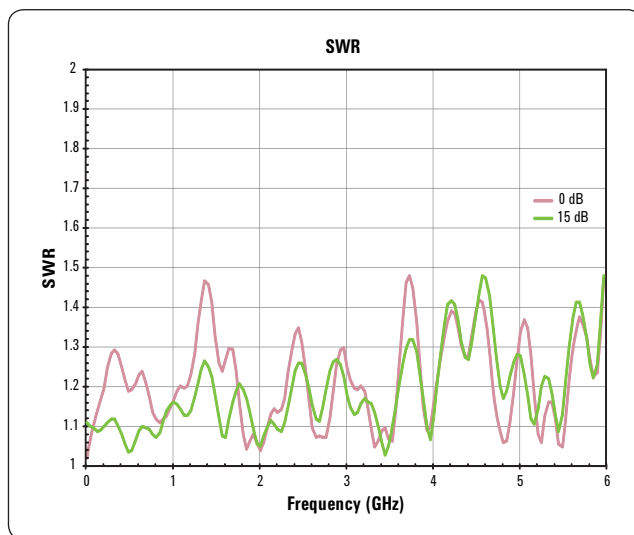

| Maximum reverse power, nominal              |   |            |                     |
|---|---|------------|---------------------|
| < 1 GHz                                     | 50 W  |            |                     |
| > 1 to < 2 GHz                              | 25 W  |            |                     |
| > 2 to < 6 GHz                              | 20 W  |            |                     |
| Max DC voltage                              | 50 VDC  |            |                     |
| Trip level                                  | 2 W   |            |                     |
| Amplitude switching speed <sup>1</sup>      | Standard  | Option UNZ | Option UNZ, typical |
| CW mode                                     |   |            |                     |
| SCPI mode                                   | ≤ 5 ms, typical   | ≤ 750 μs   | ≤ 650 μs            |
| Power search SCPI mode                      | < 12 ms, measured   |            |                     |
| List/step sweep mode                        | ≤ 5 ms, typical   | ≤ 500 μs   | ≤ 300 μs            |
| Digital modulation on (N5182B only)         |   |            |                     |
| SCPI mode                                   | ≤ 5 ms, typical   | ≤ 1.15 ms  | ≤ 950 μs            |
| Power search SCPI mode                      | < 12 ms, measured   |            |                     |
| List/step sweep mode                        | ≤ 5 ms, typical   | ≤ 900 μs   | ≤ 400 μs            |
| Alternate power level control (N5182B only) |   |            |                     |
| Switching time (via waveform markers)       | 20 μs within ± 1 dB, measured   |            |                     |
| Functional power range                      | -15 dBm to -144 dBm, measured   |            |                     |
| User flatness correction                    |   |            |                     |
| Number of points                            | 3201  |            |                     |
| Number of tables                            | Dependent on available free memory in instrument; 10,000 maximum  |            |                     |
| Entry modes                                 | USB/LAN direct power meter control, LAN to GPIB and USB to GPIB, remote bus and manual USB/GPIB power meter control |            |                     |
| Sweep modes                                 |   |            |                     |
|   | See Frequency Specifications section for more detail  |            |                     |

1. Time from receipt of SCPI command or trigger signal to amplitude settled within 0.2 dB. Switching speed specifications apply when status register updates are off.

# Spectral Purity Specifications

## Standard absolute SSB phase noise (dBc/Hz, CW, at 20 kHz offset) () = typical <sup>1</sup>

|           |             |
|-----------|-------------|
| ≤ 250 MHz | -129 (-133) |
| 250.1 MHz | -140 (-143) |
| 500 MHz   | -135 (-139) |
| 1 GHz     | -131 (-134) |
| 2 GHz     | -124 (-127) |
| 3 GHz     | -123 (-127) |
| 4 GHz     | -118 (-122) |
| 6 GHz     | -116 (-121) |



## Option UNX absolute SSB phase noise (dBc/Hz, CW, at 20 kHz offset) () = typical <sup>1</sup>







|           |             |
|-----------|-------------|
| ≤ 250 MHz | -140 (-143) |
| 250.1 MHz | -144 (-150) |
| 500 MHz   | -143 (-150) |
| 1 GHz     | -141 (-146) |
| 2 GHz     | -135 (-141) |
| 3 GHz     | -131 (-137) |
| 4 GHz     | -118 (-122) |
| 6 GHz     | -117 (-121) |

## Option UNY absolute SSB phase noise (CW) () = measured <sup>1</sup> (Subject to export controls > 3.2 GHz)

| Frequency | 1 Hz  | 10 Hz      | 100 Hz      | 1 kHz       | 10 kHz      | 100 kHz     |
|-----------|-------|------------|-------------|-------------|-------------|-------------|
| 249 MHz   | (-85) | -93 (-103) | -103 (-112) | -130 (-135) | -139 (-142) | -138 (-142) |
| 250.1 MHz | (-85) | -96 (-110) | -104 (-118) | -127 (-139) | -144 (-148) | -147 (-152) |
| 500 MHz   | (-74) | -89 (-100) | -98 (-109)  | -125 (-139) | -139 (-149) | -145 (-149) |
| 1 GHz     | (-70) | -87 (-97)  | -93 (-106)  | -123 (-136) | -141 (-146) | -140 (-143) |
| 2 GHz     | (-65) | -79 (-90)  | -85 (-101)  | -114 (-131) | -135 (-140) | -134 (-137) |
| 3 GHz     | (-61) | -74 (-88)  | -81 (-98)   | -112 (-126) | -132 (-136) | -131 (-135) |
| 4 GHz     | (-61) | -73 (-84)  | -79 (-95)   | -110 (-124) | -130 (-134) | -127 (-131) |
| 6 GHz     | (-57) | -69 (-81)  | -76 (-91)   | -107 (-121) | -126 (-130) | -125 (-129) |

1. From 20 to 30 °C, excludes mechanic vibration, measured @ +10 dBm or maximum specified power, whichever is less.

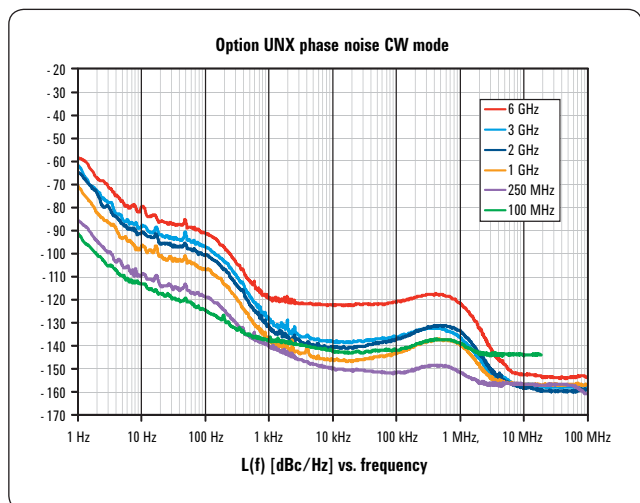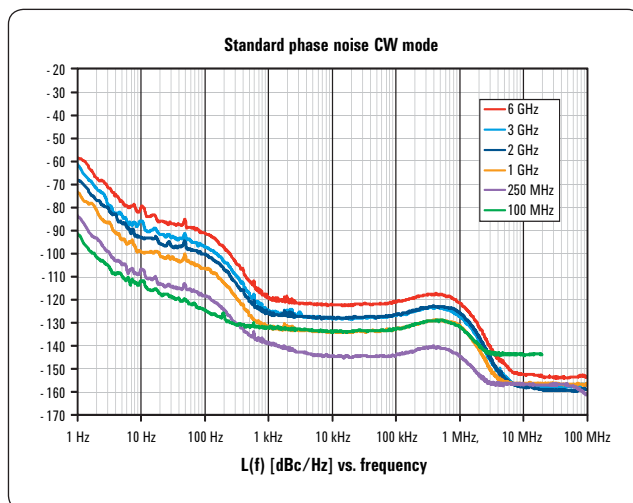

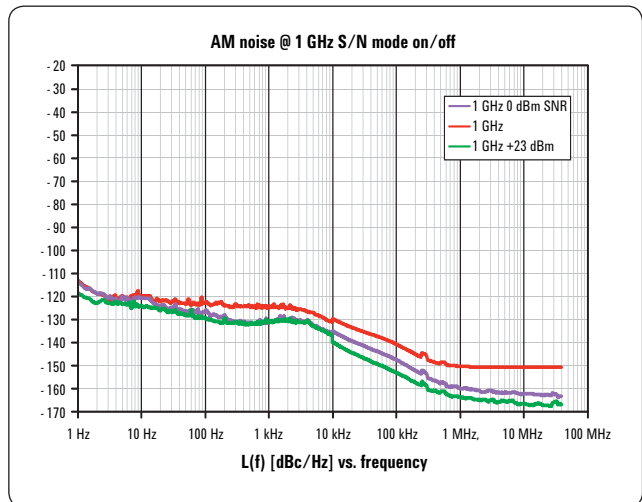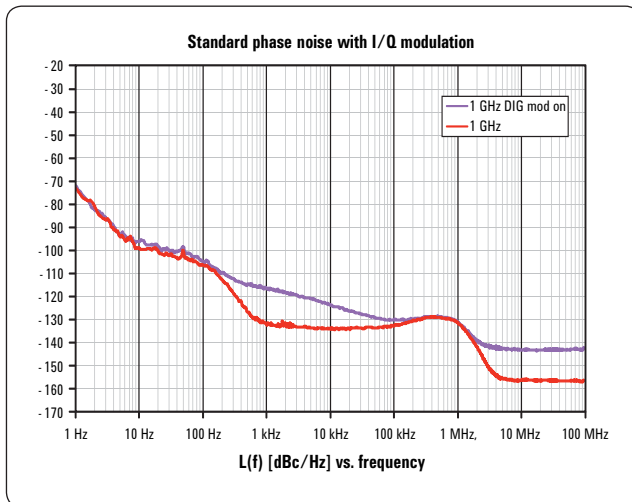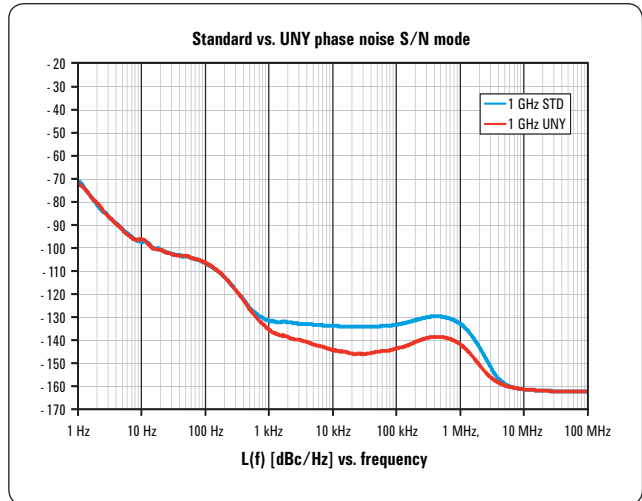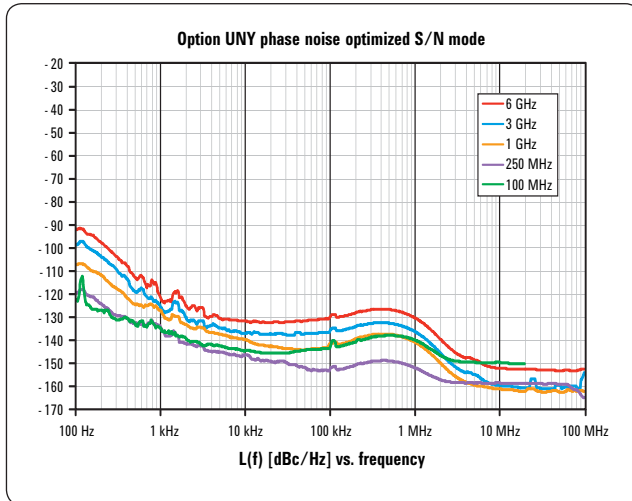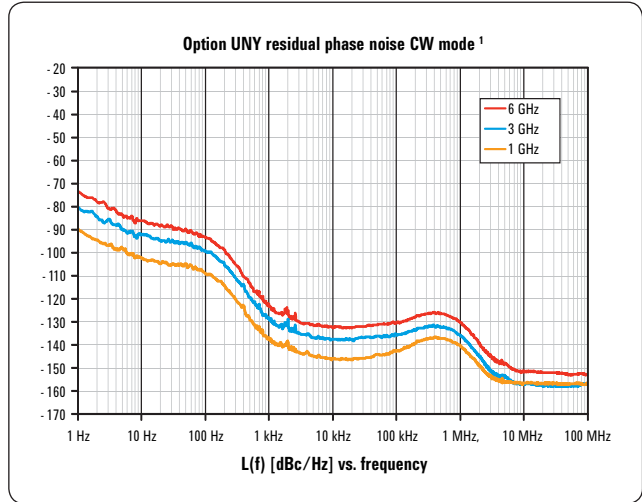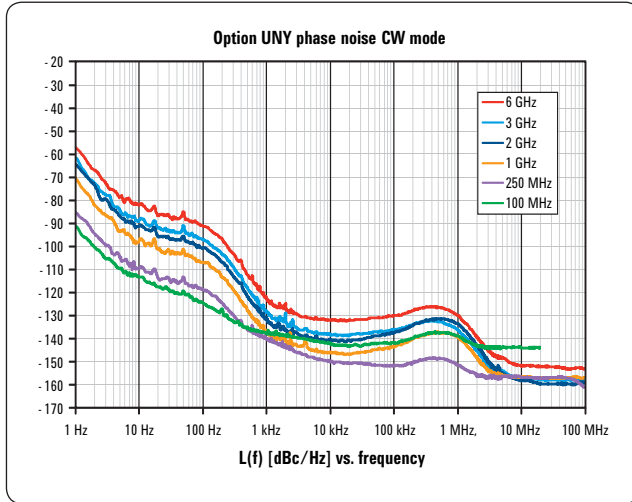

1. Use external 10 MHz input path for maximum performance

| Harmonics (CW mode)                              |                           |                      |                   |                   |
|--|---------------------------|----------------------|-------------------|-------------------|
| Range  | Standard < +4 dBm         | Option 1EA < +12 dBm |                   |                   |
| 9 kHz to 3 GHz                                   | < -35 dBc                 | < -30 dBc            |                   |                   |
| > 3 to 4 GHz                                     | < -35 dBc, typical        | < -35 dBc, typical   |                   |                   |
| > 4 to 6 GHz                                     | < -53 dBc, typical        | < -40 dBc, typical   |                   |                   |
| Nonharmonics (CW mode) <sup>1</sup> () = typical |                           |                      |                   |                   |
| Range  | > 10 KHz offset           |                      |                   |                   |
|  | Standard (dBc)            | UNX or UNY (dBc)     |                   |                   |
| 9 kHz to < 5 MHz                                 | -65, nominal              | -65, nominal         |                   |                   |
| 5 to < 250MHz                                    | -75                       | -75 (-80)            |                   |                   |
| 250 to < 750 MHz                                 | -87                       | -96 (-100)           |                   |                   |
| 750 MHz to < 1.5 GHz                             | -87                       | -92 (-96)            |                   |                   |
| 1.5 to < 3.0 GHz                                 | -81                       | -86 (-90)            |                   |                   |
| 3 to 6 GHz                                       | -75                       | -80 (-84)            |                   |                   |
| Subharmonics (CW mode) () = typical              |                           |                      |                   |                   |
| 9 kHz to 1.5 GHz                                 | None                      |                      |                   |                   |
| > 1.5 to 3 GHz                                   | -82 dBc (-91)             |                      |                   |                   |
| > 3 to 6 GHz                                     | -74 dBc (-81)             |                      |                   |                   |
| Jitter (standard phase noise) <sup>2</sup>       |                           |                      |                   |                   |
| Carrier frequency                                | SONET/SDH data rate       | rms jitter BW        | μUI rms, typical  | Seconds, typical  |
| 155 MHz  | 155 MB/s                  | 100 Hz to 1.5 MHz    | 91.8              | 0.6 ps            |
| 622 MHz  | 622 MB/s                  | 1 KHz to 5 MHz       | 50.5              | 81 fs             |
| 2.488 GHz  | 2488 MB/s                 | 5 kHz to 20 MHz      | 198               | 80 fs             |
| Jitter (UNX or UNY phase noise) <sup>2</sup>     |                           |                      |                   |                   |
| Carrier frequency                                | SONET/SDH data rate       | rms jitter BW        | μUI rms, measured | Seconds, measured |
| 155 MHz  | 155 MB/s                  | 100 Hz to 1.5 MHz    | 40                | 0.25 ps           |
| 622 MHz  | 622 MB/s                  | 1 KHz to 5 MHz       | 21                | 33 fs             |
| 2.488 GHz  | 2488 MB/s                 | 5 kHz to 20 MHz      | 72                | 29 fs             |
| Phase coherence (Option 012)                     |                           |                      |                   |                   |
| LO input frequency range                         | 250 MHz to 6 GHz, nominal |                      |                   |                   |
| LO input power range                             | 0 to +7 dBm, nominal      |                      |                   |                   |
| LO output frequency range                        | 250 MHz to 6 GHz, nominal |                      |                   |                   |
| LO output power range                            | 0 to +7 dBm, nominal      |                      |                   |                   |

1. < 3 GHz fixed 100 MHz spur is specified @ -78 dBc. In signal-to-noise optimization mode 100 MHz spur is < -100 dBc, measured.

2. Calculated from phase noise performance in CW mode at +10 dBm. For other frequencies, data rates, or bandwidths, please consult your sales representative.

# Analog Modulation Specifications

| Frequency bands |                        |                       |
|-----------------|------------------------|-----------------------|
| Band #          | Frequency range        | N                     |
| 1               | 9 kHz to <5 MHz        | 1 (digital synthesis) |
| 1               | 5 to < 250 MHz         | 1                     |
| 2               | 250 to < 375 MHz       | 0.25                  |
| 3               | 375 to < 750 MHz       | 0.5                   |
| 4               | 750 to < 1500 MHz      | 1                     |
| 5               | 1500 to < 3000.001 MHz | 2                     |
| 6               | 3000.001 to 6000 MHz   | 4                     |

| Frequency modulation (Option UNT) (See N value above) |   |  |  |
|---|---|--|--|
| Max deviation   | N × 4 MHz, nominal  |  |  |
| Resolution  | 0.1% of deviation or 1 Hz, whichever is greater, nominal      |  |  |
| Deviation accuracy                                    | < ± 2% + 20 Hz (1 kHz rate, deviation is N x 50 kHz)          |  |  |
| Modulation frequency response @ 100 KHz rate          | 1 dB bandwidth  | DC/5 Hz to 3 MHz, nominal  |  |
|   | 3 dB bandwidth  | DC/1 Hz to 7 MHz, nominal  |  |
| Carrier frequency accuracy                            | < ± 0.2% of set deviation + (N × 1 Hz) <sup>1</sup>           |  |  |
| Relative to CW in DCFM                                | < ± 0.06% of set deviation + (N × 1 Hz), typical <sup>2</sup> |  |  |
| Distortion  | < 0.4% [1 kHz rate, deviation is N x 50 kHz]                  |  |  |
|   | FM using external inputs 1 or 2                               | Sensitivity  | +1 V peak for indicated deviation, nominal |
|   |   | Input impedance  | 50 Ω/600 Ω/1 M Ω, nominal                  |
|   | Paths   | FM path 1 and FM path 2 are summed internally for composite modulation |  |

| Phase modulation (Option UNT) (See N value above) |  |  |
|---|--|--|
| Maximum deviation                                 | Normal bandwidth   | N × 2 radians, nominal   |
|   | High-bandwidth mode  | N × 0.2 radians, nominal   |
| Frequency response                                | Normal bandwidth (3 dB)  | DC to 1 MHz, nominal   |
|   | High-bandwidth mode (3 dB)                                       | DC to 4 MHz, nominal   |
| Resolution  | 0.1% of deviation  |  |
| Deviation accuracy                                | < + 0.5% + 0.01 rad, typical [1 kHz rate, normal bandwidth mode] |  |
| Distortion  | < 0.2%, typical [1 kHz rate, deviation normal bandwidth mode]    |  |
| ΦM using external inputs 1 or 2                   | Sensitivity  | +1 V peak for indicated deviation, nominal                             |
|   | Input impedance  | 50 Ω or 600 Ω or 1 M Ω, nominal  |
|   | Paths  | ΦM path 1 and ΦM path 2 are summed internally for composite modulation |

1. Specification valid for temperature changes of less than ± 5 °C since last DCFM calibration.

2. Typical performance immediately after a DCFM calibration.

| Amplitude modulation (Option UNT) <sup>1</sup> |  |  |                  |
|--|--|--|------------------|
| AM depth type                                  | Linear or exponential                        |  |                  |
| Maximum depth                                  | 100%   |  |                  |
| Depth resolution                               | 0.1% of depth (nom)                          |  |                  |
| AM depth error<br>@1 KHz rate and < 80% depth  | f < 5 MHz                                    | < 1.5% of setting + 1% (typ 0.5% of setting + 1%)                      |                  |
|  | 5 MHz < f < 2 GHz                            | < 3% of setting + 1 %  |                  |
|  | 2 < f < 3 GHz                                | < 5% of setting + 1% (typical 3% of setting + 1%)                      |                  |
| Total harmonic distortion<br>@ 1 KHz rate      | F < 5 MHz                                    | 30% depth  | < 0.25%, typical |
|  |  | 80% depth  | < 0.5%, typical  |
|  | 5 MHz < f < 2 GHz<br>(2 to 3 GHz is typical) | 30% depth  | < 2%             |
|  |  | 80% depth  | < 2%             |
| Frequency response                             | 30% depth, 3 dB BW                           | DC/10 Hz to 50 KHz   |                  |
| AM inputs using external inputs<br>1 or 2      | Sensitivity                                  | +1 V peak for indicated depth (Over-range can be 200% or 2.2 V peak)   |                  |
|  | Input impedance                              | 50 Ω or 600 Ω or 1M Ω, Damage level: ± 5 V max                         |                  |
|  | Paths  | AM path 1 and AM path 2 are summed internally for composite modulation |                  |
| Wideband AM (N5182B only)                      | Rates ALC off/on                             | DC/800 Hz to 80 MHz, nominal   |                  |
|  | Sensitivity                                  | 0.5 V = 100% (0.5 V DC offset required)                                |                  |
|  | Input impedance                              | 50 Ω, nominal (I input)  |                  |

| Simultaneous and composite modulation <sup>2</sup>        |  |           |              |              |                                 |                                 |
|---|--|-----------|--------------|--------------|---------------------------------|---------------------------------|
| Simultaneous modulation                                   | All modulation types (IQ, FM, AM, ΦM, and pulse modulation) may be simultaneously enabled except: FM and phase modulation cannot be combined and two modulation types cannot be simultaneously generated using the same modulation source; for example, the baseband I/Q generator, AM, and FM can run concurrently and all will modulate the output RF (this is useful for simulating signal impairments) |           |              |              |                                 |                                 |
| Composite modulation                                      | AM, FM, and ΦM each consist of two modulation paths which are summed internally for composite modulation; modulation can be any combination of internal or external sources  |           |              |              |                                 |                                 |
|   | <b>AM</b>  | <b>FM</b> | <b>Phase</b> | <b>Pulse</b> | <b>Internal IQ <sup>1</sup></b> | <b>External IQ <sup>1</sup></b> |
| AM  | +  | +         | +            | +            | +                               | +                               |
| FM  | +  | +         | -            | +            | +                               | +                               |
| Phase   | +  | -         | +            | +            | +                               | +                               |
| Pulse   | +  | +         | +            | -            | +                               | +                               |
| Internal I/Q(1)   | +  | +         | +            | +            | -                               | +                               |
| External IQ (1)   | +  | +         | +            | +            | +                               | -                               |
| + = compatible, - = incompatible, * = Internal + External |  |           |              |              |                                 |                                 |

1. AM specifications apply 6 dB below maximum specified power from 20 to 30 °C.

2. IQ modulation available on N5182B.

| External modulation inputs  |  |
|---|--|
| (Option UNT required for FM, AM, and phase modulation inputs; Option UNW required for pulse modulation inputs)  |  |
| EXT1  | AM, FM, PM   |
| EXT2  | AM, FM, PM   |
| PULSE   | Pulse (50 Ω only)  |
| I   | Wideband AM (50 Ω only, N5182B only)   |
| Input impedance   | 50 Ω, 1 MΩ, 600 Ω, DC and AC coupled   |
| Standard internal analog modulation source  |  |
| (Single sine wave generator for use with AM, FM, phase modulation requires Option UNT or 303)   |  |
| Waveform  | Sine   |
| Rate range  | 0.1 Hz to 2 MHz (tunable to 3 MHz)   |
| Resolution  | 0.1 Hz   |
| Frequency accuracy  | Same as RF reference source, nominal   |
| LF audio output   | 0 to 5 V peak into 50 Ω, -5V to 5 V offset, nominal  |
| Multifunction generator (Option 303)  |  |
| The multifunction generator option (Option 303) consists of seven waveform generators that can be set independently with up to five simultaneously using the composite modulation features in AM, FM/PM, and LF out |  |
| Waveform  |  |
| Function generator 1  | Sine, triangle, square, positive ramp, negative ramp (pulse for LF out only)   |
| Function generator 2  | Sine, triangle, square, positive ramp, negative ramp (pulse for LF out only)   |
| Dual function generator   | Sine, triangle, square, positive ramp, negative ramp, phase offset, and amplitude ratio for Tone 2 relative to Tone 1          |
| Swept function generator  | Sine, triangle, square, positive ramp, negative ramp<br>Trigger: free run, trigger key, bus, external, internal, timer trigger |
| Noise generator 1   | Uniform, Gaussian  |
| Noise generator 2   | Uniform, Gaussian  |
| DC  | Only for LF output -5 V to +5 V, nominal   |
| Frequency parameters  |  |
| Sine wave   | 0.1 Hz to 10 MHz   |
| Triangle, square, ramp, pulse   | 0.1 Hz to 1 MHz, nominal   |
| Noise bandwidth   | 10 MHz, nominal  |
| Resolution  | 0.1 Hz   |
| Frequency accuracy  | Same as RF reference source, nominal   |
| Narrow pulse modulation (Option UNW) <sup>1</sup>   |  |
| On/off ratio  | > 80 dB, typical   |
| Rise/fall times (Tr, Tf)  | < 10 ns; 7 ns, typical   |
| Minimum pulse width ALC on/off  | > 2 us/> 20 ns   |
| Repetition frequency ALC on/off   | 10 Hz to 500 kHz/DC to 10 MHz  |
| Level accuracy (relative to CW) ALC on/off <sup>2</sup>   | < ± 1.0 dB/< ± 1.0 dB, typical   |
| Width compression (RF width relative to video out)  | < 5 ns, typical  |


1. Pulse specifications apply to frequencies > 500 MHz. Operable down to 10 MHz.

2. With power search on.



|  |   |
|--|---|
| Video feed-through <sup>1</sup> ≤ 3GHz/> 3 GHz | < 50 mV, typical/< 5 mV, typical                |
| Video delay (ext input to video)               | 30 ns, nominal                                  |
| RF delay (video to RF output)                  | 20 ns, nominal                                  |
| Pulse overshoot                                | < 15%, typical                                  |
| Input level                                    | +1 V <sub>peak</sub> = RF on into 50 Ω, nominal |

T<sub>d</sub> video delay (variable)  
T<sub>w</sub> video pulse width (variable)  
T<sub>p</sub> pulse period (variable)  
T<sub>m</sub> RF delay  
T<sub>rf</sub> RF pulse width  
T<sub>f</sub> RF pulse fall time  
T<sub>r</sub> RF pulse rise time  
V<sub>or</sub> pulse overshoot  
V<sub>f</sub> Video feedthrough

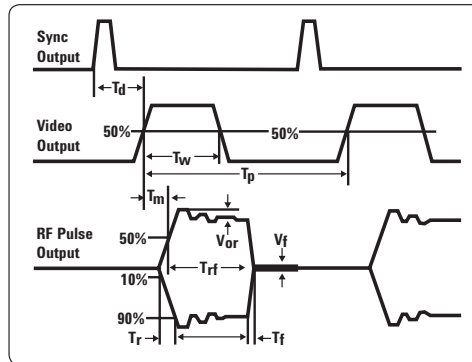


### Internal pulse generator (included with Option UNW)

|                                   |   |  |
|-----------------------------------|---|--|
| Modes                             | Free-run, square, triggered, adjustable doublet, trigger doublet, gated, and external pulse |  |
| Square wave rate                  | 0.1 Hz to 10 MHz, 0.1 Hz resolution, nominal  |  |
| Pulse period                      | 30 ns to 42 seconds, nominal  |  |
| Pulse width                       | 20 ns to pulse period –10 ns, nominal   |  |
| Resolution                        | 10 ns   |  |
| Adjustable trigger delay          | –pulse period + 10 ns to pulse period to pulse width –10 ns                                 |  |
| Settable delay                    | Free run  | –3.99 to 3.97 μs                                       |
|                                   | Triggered   | 0 to 40 s  |
| Resolution (delay, width, period) | 10 ns, nominal  |  |
| Pulse doublets                    | 1st pulse delay   | (Relative to sync out) 0 to 42 s – pulse width – 10 ns |
|                                   | 1st pulse width   | 500 ns to 42 s – delay – 10 ns                         |
|                                   | 2nd pulse delay   | 0 to 42 s – (Delay 1 + Width 2) – 10 ns                |
|                                   | 2nd pulse width   | 20 ns to 42 s – (Delay 1 + Delay 2) – 10 ns            |

### Pulse train generator Option 320 (requires Option UNW)

|                          |                 |
|--------------------------|-----------------|
| Number of pulse patterns | 2047            |
| On/off time range        | 20 ns to 42 sec |

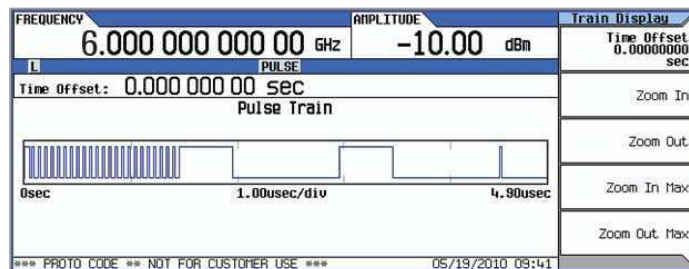

1. Video feed through applies to power levels < +10 dBm.



# Vector Modulation Specifications

## N5182B only

| I/Q modulator external inputs <sup>1</sup>                                     |   |  |
|--|---|--|
| Bandwidth  | Baseband (I or Q)<br>RF (I+Q)   | Up to 100 MHz baseband, nominal<br>Up to 200 MHz RF, nominal |
| I or Q offset  | ± 100 mV (200 uV resolution)  |  |
| I/Q gain   | ± 1 dB (0.001 dB resolution)  |  |
| Quadrature angle adjustment  | ± 200 units   |  |
| Full scale input drive (I+Q)   | 0.5 V into 50 Ω, nominal  |  |
| Internal I/Q baseband generator adjustments <sup>2</sup> (Options 656 and 657) |   |  |
| I/Q offset   | ± 20% (0.025% resolution)   |  |
| I/Q gain   | ± 1 dB (0.001 dB resolution)  |  |
| Quadrature angle adjustment  | ± 10 ° (0.01 degrees resolution)  |  |
| I/Q phase  | ± 360.00 ° (0.01 degrees resolution)                                    |  |
| I/Q skew   | ± 800.00 ns (1 picosecond resolution)                                   |  |
| I/Q delay  | ± 400.00 ns (1 picosecond resolution)                                   |  |
| External I/Q outputs   |   |  |
| Impedance  | 50 Ω, nominal per output<br>100 Ω, nominal differential output          |  |
| Type   | Single-ended or differential (Option 1 EL)                              |  |
| Maximum voltage per output   | ± 0.5 V peak-to-peak; into 50 Ω (200 uV resolution)                     |  |
| Bandwidth  | Baseband (I or Q)   | 80 MHz, nominal (Option 656 and 657)                         |
| Amplitude flatness   | ± 0.2 dB measured with channel corrections optimized for IQ output      |  |
| Phase flatness   | ± 2.5 degrees measured with channel corrections optimized for IQ output |  |
| Common mode I/Q offset   | ± 1.5 V into 50 Ω (200 uV resolution)                                   |  |
| Differential mode I or Q offset  | ± 25 mV into 50 Ω (200 uV resolution)                                   |  |

1. I/Q adjustments represent user interface parameter ranges and not specifications.

2. Internal IQ adjustments apply to RF out and IQ outputs simultaneously.

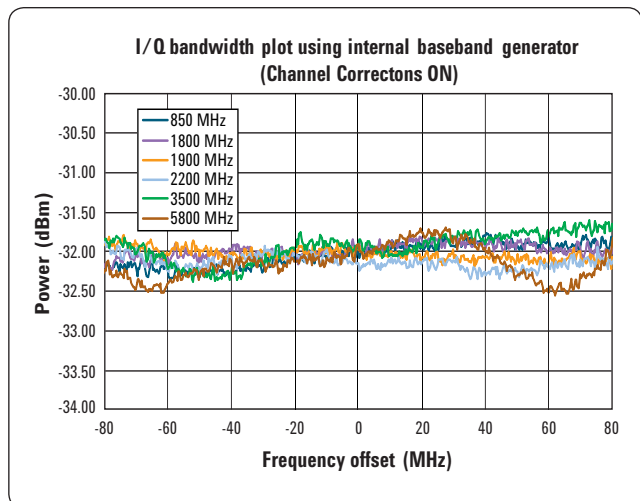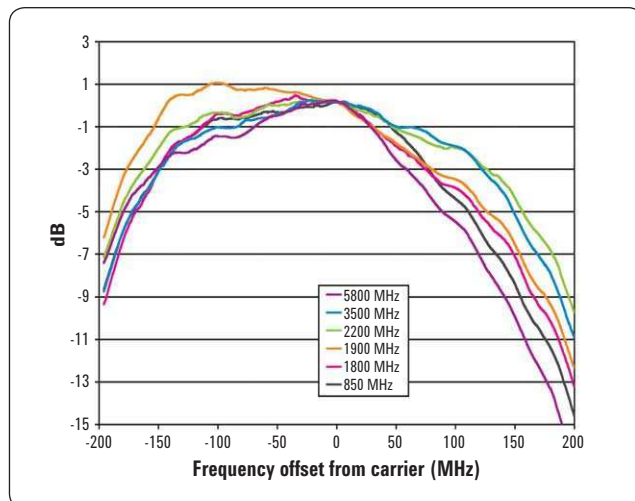

| Baseband generator (Options 656 and 657)       |  |   |
|--|--|---|
| Channels                                       | 2 [I and Q]  |   |
| Resolution                                     | 16 bits [1/65,536]   |   |
| Sample rate                                    | Option 656   | 100 Sa/s to 100 MSa/s                         |
|  | Option 656 and 657   | 100 Sa/s to 200 MSa/s                         |
| RF bandwidth                                   | Option 656   | 80 MHz, nominal                               |
|  | Option 656 and 657   | 160 MHz, nominal                              |
| Interpolated DAC rate                          | 800 MHz (waveforms only need OSR = 1.25 )  |   |
| Frequency offset range                         | ± 80 MHz   |   |
| Digital sweep modes                            | In list sweep mode each point in the list can have independent waveforms (N5182B) along with user definable frequencies and amplitudes; see the Amplitude and Frequency Specifications sections for more detail. |   |
| Waveform switching speed <sup>1</sup>          | SCPI mode  | ≤ 5 ms, measured (standard)                   |
|  |  | ≤ 1.2 ms, measured (Option UNZ)               |
|  | List/step sweep mode   | ≤ 5 ms, measured (standard)                   |
|  |  | ≤ 900 us, measured (Option UNZ)               |
| Waveform transfer rates (measured, no markers) | FTP LAN to internal SSD  | 10.7 MB/sec or 2.67 Msa/sec                   |
|  | Internal SSD to FTP LAN  | 7.7 MB/sec 1.92 Msa/sec                       |
|  | FTP LAN to BBG   | 8.2 MB/sec or 2.05 Msa/sec                    |
|  | FTP LAN to BBG encrypted   | 4 MB/sec or 1 Msa/sec                         |
|  | USB to BBG   | 19 MB/sec or 4.75 Msa/sec                     |
|  | BBG to USB   | 1.2 MB/sec or 300 Ksa/sec                     |
|  | Internal SSD to BBG  | 48 MB/sec or 12 Msa/sec                       |
|  | BBG to internal SSD  | 1.2 MB/sec or 300 Ksa/sec                     |
|  | Removable SD card to baseband generator (Option 006)   |   |
| Arbitrary waveform memory                      | Maximum playback capacity  | 32 Msa (standard)                             |
|  |  | 512 Msa (Option 022)                          |
|  |  | 1024 Msa (Option 023)                         |
|  | Maximum storage capacity including markers   | 3 GBytes/800 Msa (standard)                   |
| 30 GBytes/7.5 Gsa (Option 009)                 |  |   |
|  |  | 8 GBytes / 2 Gsa (Option 006)                 |
| Waveform segments                              | Segment length   | 60 samples to 32 Msa (standard)               |
|  |  | 60 samples to 512 Msa (Option 022)            |
|  |  | 60 samples to 1024 Msa (Option 023)           |
|  | Minimum memory allocation per segment  | 256 samples                                   |
| Maximum number of segments                     | 8192   |   |
| Waveform sequences                             | Maximum number of sequences  | > 2000 depending on non-volatile memory usage |
|  | Maximum number of segments/sequence  | 32,000 (standard)                             |
|  |  | 4 million (Option 022 or 023)                 |
| Maximum number of repetitions                  | 65,535   |   |

1. SCPI mode switching speed applies when waveforms are pre-loaded in list sweep and sample rate ≥ 10 MSa/s.

|   |   |   |   |
|---|---|---|---|
| Triggers  | Types   | Continuous, single, gated, segment advance          |   |
|   | Source  | Trigger key, external, bus (GPIB, LAN, USB)         |   |
|   | Modes   | Continuous  | Free run, trigger and run, reset and run            |
|   |   | Single  | No retrigger, buffered trigger, immediate retrigger |
|   |   | Gated   | Negative polarity or positive polarity              |
|   |   | Segment advance                                     | Single or continuous                                |
|   | External coarse delay time  | 5 ns to 40 s  |   |
|   | External coarse delay resolution  | 5 ns  |   |
|   | Trigger latency (Single trigger only)   | 356 ns + 1 sample clock period, nominal             |   |
| Trigger accuracy (Single trigger only)  | ± 2.5 ns, nominal   |   |   |
| Multi-baseband generator synchronization mode (multiple sources)                            | Fan out   | 1 master and up to 15 slaves                        |   |
|   | Trigger repeatability   | < 1 ns, nominal                                     |   |
|   | Trigger accuracy  | Same as normal mode                                 |   |
|   | Trigger latency   | Same as normal mode                                 |   |
|   | Fine trigger delay range  | See Internal IQ Baseband section                    |   |
|   | Fine trigger delay resolution   | See Internal IQ Baseband section                    |   |
|   | IQ phase adjustment range   | See Internal IQ Baseband section                    |   |
| Markers   | Markers are defined in a segment during the waveform generation process, or from the front panel; a marker can also be routed to the RF blanking, ALC hold functions, and alternate amplitude; see Users Guide for more information |   |   |
|   | Marker polarity   | Negative, positive                                  |   |
|   | Number of markers   | 4   |   |
|   | RF blanking/burst on/off ratio  | > 80 dB   |   |
|   | Alternate amplitude control switching speed   | See amplitude section                               |   |
| <b>Real-time baseband generator (Option 660)</b>  |   |   |   |
| Real-time baseband generator required for real-time Signal Studio applications <sup>1</sup> | Cellular real-time applications   | LTE-FDD, LTE-TDD, HSPA+/W-CDMA, GSM/EDGE, cdma2000® |   |
|   | Real-time navigation  | GPS, GLONASS  |   |
|   | Real-time video applications  | DVB-T/T2/H/S/S2/C/J.83 Annex A/C, ISDB-T/           |   |
|   | Note: Option 660 is not required for real-time custom modulation (Option 431)   |   |   |
|   | Memory: Shares memory with Options 656 and 657  |   |   |
|   | Triggering: Same as Options 656 and 657   |   |   |
|   | Markers: 3 markers available, all other features are same as Options 656 and 657  |   |   |
| <b>AWGN (Option 403)</b>  |   |   |   |
| Type  | Real-time, continuously calculated, and played using DSP  |   |   |
| Modes of operation  | Standalone or digitally added to signal played by arbitrary waveform or real-time baseband generator  |   |   |
| Bandwidth   | With Option 656   | 1 Hz to 80 MHz                                      |   |
|   | With Option 656 and 657   | 1 Hz to 160 MHz                                     |   |
| Crest factor  | 15 dB   |   |   |
| Randomness  | 90 bit pseudo-random generation, repetition period 313 x 10 <sup>9</sup> years  |   |   |
| Carrier-to-noise ratio  | ± 100 dB when added to signal   |   |   |
| Carrier-to-noise ratio formats  | C/N, Eb/No  |   |   |
| Carrier-to-noise ratio error  | Magnitude error ≤ 0.2 dB at baseband I/Q outputs  |   |   |

1. See Signal Studio configuration assistant for more information.

### Custom modulation Arb Mode (Option 431)

|                   |  |  |
|-------------------|--|--|
| Modulation        | PSK  | BPSK, QPSK, OQPSK, $\pi/4$ DQPSK, gray coded and unbalanced QPSK, 8PSK, 16PSK, D8PSK           |
|                   | QAM  | 4, 16, 32, 64, 128, 256, 1024 (and 89600 VSA mappings)   |
|                   | FSK  | Selectable: 2,4,8, 16, C4FM  |
|                   | MSK  | 0 to 100 °   |
|                   | ASK  | 0 to 100%  |
| Multicarrier      | Number of carriers   | Up to 100 (limited by a max bandwidth of 160 MHz depending on symbol rate and modulation type) |
|                   | Frequency offset (per carrier)   | Up to -80 to +80 MHz   |
|                   | Power offset (per carrier)   | 0 dB to -40 dB   |
| Symbol rate       | 50 sps to 100 Msps   |  |
| Filter types      | Nyquist, root-Nyquist, Gaussian, rectangular, APCO 25 C4EM, user   |  |
| Quick setup modes | APCO 25w/C4FM, APCO25 w/CQPSK, <i>Bluetooth</i> <sup>®</sup> , CDPD, DECT, EDGE, GSM, NADC, PDC, PHS, PWT, TETRA |  |
| Data              | Random only  |  |

### Custom modulation real-time mode (Option 431) (Does not require Option 660)

|                   |  |  |   |  |
|-------------------|--|--|---|--|
| Modulation        | PSK  | BPSK, QPSK, OQPSK, $\pi/4$ DQPSK, gray coded and unbalanced QPSK, 8PSK, 16PSK, D8PSK   |   |  |
|                   | QAM  | 4, 16, 32, 64, 128, 256, 1024 (and 89600 VSA mappings)   |   |  |
|                   | FSK  | Selectable   | 2,4,8, 16 level symmetric, C4FM         |  |
|                   |  | User-defined   | Custom map of up to 16 deviation levels |  |
|                   |  | Max deviation  | 40 MHz                                  |  |
|                   | MSK  | 0 to 100 °   |   |  |
|                   | ASK  | 0 to 100%  |   |  |
| Custom I/Q        | Custom map of 1024 unique values   |  |   |  |
| Frequency offset  | Up to -80 MHz to +80 MHz   |  |   |  |
| Symbol rate       | Internal generated data  | 1000 sps up to 100 Msps and max of 10 bits per symbol  |   |  |
|                   | External serial data   | 1000 sps to [(50 Mbits/sec)/(#bits/symbol)]  |   |  |
| Filter types      | Selectable   | Nyquist, root-Nyquist, Gaussian, rectangular, APCO 25 C4FM, IS-95  |   |  |
|                   | Custom FIR   | 16-bit resolution, up to 64 symbols long, automatically resampled to 1024 coefficients (max)<br>> 32 to 64 symbol filter: symbol rate $\leq$ 12.5 MHz<br>> 16 to 32 symbol filter: symbol rate $\leq$ 25 MHz<br>Internal filters switch to 16 tap when symbol rate is between 25 and 100 MHz |   |  |
| Quick setup modes | APCO 25w/C4FM, APCO25 w/CQPSK, TETRA, <i>Bluetooth</i> , CDPD, DECT, EDGE, GSM, NADC, PDC, PHS, PWT, WorldSpace, Iridium, ICO, CT2, TFTS |  |   |  |
| Trigger delay     | Range  | 0 to 1,048,575 bits  |   |  |
|                   | Resolution   | 1 bit  |   |  |


|   |   |  |                             |
|---|---|--|-----------------------------|
| Data types                                  | Internally generated  | Pseudo-random patterns                     | PN9, PN11, PN15, PN20, PN23 |
|   |   | Repeating sequence                         | Any 4-bit sequence          |
|   | Direct-pattern RAM [PRAM] max size<br>Note: Used for custom TDMA/non-standard framing |  | 32 Mb (standard)            |
|   |   |  | 512 Mb (Option 022)         |
|   |   |  | 1024 Mb (Option 023)        |
| User file                                   |   | 32 MB (standard)                           |                             |
|   |   | 512 MB (Option 022)                        |                             |
| Externally streamed data                    | Type  | Serial data                                |                             |
|   | Inputs/outputs  | Data, symbol sync, bit clock (output only) |                             |
| Internal burst shape (varies with bit rate) | Rise/fall time range  | Up to 30 bits                              |                             |
|   | Rise/fall delay range   | -15 to +15 bits                            |                             |

### Multitone and two-tone (Option 430)

|                   |  |
|-------------------|--|
| Number of tones   | 2 to 64, with selectable on/off state per tone |
| Frequency spacing | 100 Hz to 160 MHz (Option 656 and 657)         |
| Phase (per tone)  | Fixed or random                                |

### Real-time phase noise impairments (Option 432)

|                                      |  |                                  |
|--------------------------------------|--|----------------------------------|
| Close-in phase noise characteristics | -20 dB per decade                              |                                  |
| Far-out phase noise characteristics  | -20 dB per decade                              |                                  |
| Mid-frequency characteristics        | Start frequency (f1)                           | Offset settable from 0 to 77 MHz |
|                                      | Stop frequency (f2)                            | Offset settable from 0 to 77 MHz |
| Phase noise amplitude level (L(f))   | User selected; max degradation dependent on f2 |                                  |


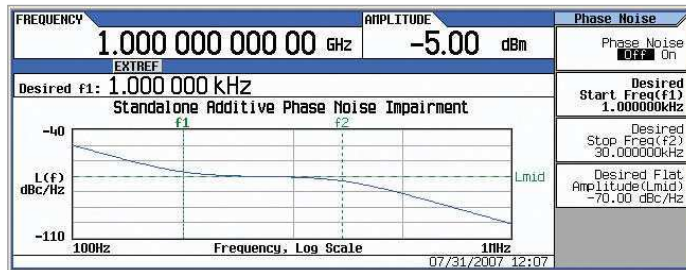


### 3GPP W-CDMA distortion performance<sup>1,2</sup>

|                    |                                      |                  | Standard             |         | Option UNV           |         | Option UNV with Option 1EA |         |
|--------------------|--------------------------------------|------------------|----------------------|---------|----------------------|---------|----------------------------|---------|
| Power level        |                                      |                  | ≤ 2 dBm <sup>2</sup> |         | ≤ 2 dBm <sup>2</sup> |         | ≤ 5 dBm <sup>2</sup>       |         |
| Offset             | Configuration                        | Frequency        | Spec                 | Typ     | Spec                 | Typ     | Spec                       | Typ     |
| Adjacent (5 MHz)   | 1 DPCH, 1 carrier                    | 1800 to 2200 MHz | -69 dBc              | -73 dBc | -71 dBc              | -75 dBc | -71 dBc                    | -75 dBc |
| Alternate (10 MHz) |                                      |                  | -70 dBc              | -75 dBc | -72 dBc              | -77 dBc | -71 dBc                    | -77 dBc |
| Adjacent (5 MHz)   | Test model 1 with 64 DPCH, 1 carrier | 1800 to 2200 MHz | -68 dBc              | -70 dBc | -71 dBc              | -73 dBc | -71 dBc                    | -72 dBc |
| Alternate (10 MHz) |                                      |                  | -73 dBc              | -72 dBc | -76 dBc              | -71 dBc | -76 dBc                    |         |
| Adjacent (5 MHz)   | Test model 1 with 64 DPCH, 4 carrier | 1800 to 2200 MHz | -63 dBc              | -65 dBc | -65 dBc              | -67 dBc | -64 dBc                    | -66 dBc |
| Alternate (10 MHz) |                                      |                  | -64 dBc              | -66 dBc | -66 dBc              | -68 dBc | -66 dBc                    | -68 dBc |

1. ACPR specifications apply when the instrument is maintained within ± 20 to 30 °C.


2. This is rms power. Convert from rms to peak envelope power (PEP) with the following equation:  $PEP = rms\ power + crest\ factor$  (for example, 3GPP test model 1 with 64 DPCH has a crest factor 11.5 dB, therefore at +5 dBm rms, the PEP = 5 dBm + 11.5dB = +16.5 dBm PEP).

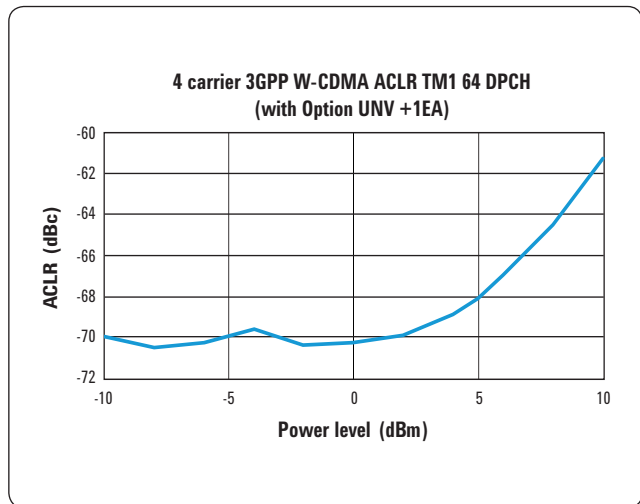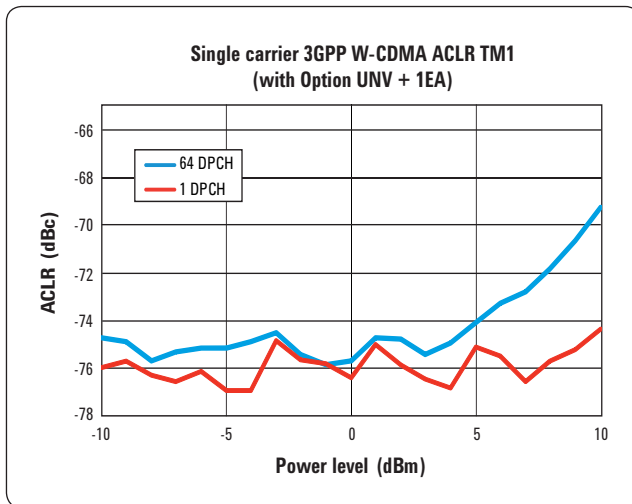

### 3GPP LTE-FDD distortion performance<sup>1</sup>

|                                 |                 |                  | Standard             |         | Option UNV           |         | Option UNV with Option 1EA |         |
|---------------------------------|-----------------|------------------|----------------------|---------|----------------------|---------|----------------------------|---------|
| Power level                     |                 |                  | ≤ 2 dBm <sup>2</sup> |         | ≤ 2 dBm <sup>2</sup> |         | ≤ 5 dBm <sup>2</sup>       |         |
| Offset                          | Configuration   | Frequency        | Spec                 | Typ     | Spec                 | Typ     | Spec                       | Typ     |
| Adjacent (10 MHz) <sup>3</sup>  | 10 MHz E-TM 1.1 | 1800 to 2200 MHz | -64 dBc              | -66 dBc | -67 dBc              | -69 dBc | -64 dBc                    | -67 dBc |
| Alternate (20 MHz) <sup>3</sup> | QPSK            |                  | -66 dBc              | -68 dBc | -69 dBc              | -71 dBc | -69 dBc                    | -71 dBc |

- ACPR specifications apply when the instrument is maintained within ± 20 to 30 °C.
- This is rms power. Convert from rms to peak envelope power with the following equation:  $PEP = rms\ power + crest\ factor$  (for example, 3GPP test model 1 with 64 DPCH has a crest factor 11.5 dB, therefore at +5 dBm rms, the PEP = 5 dBm + 11.5 dB = +16.5 dBm PEP).
- ACPR measurement configuration: reference channel integration BW: 9.015 MHz, offset channel integration bandwidth: 9.015 MHz.

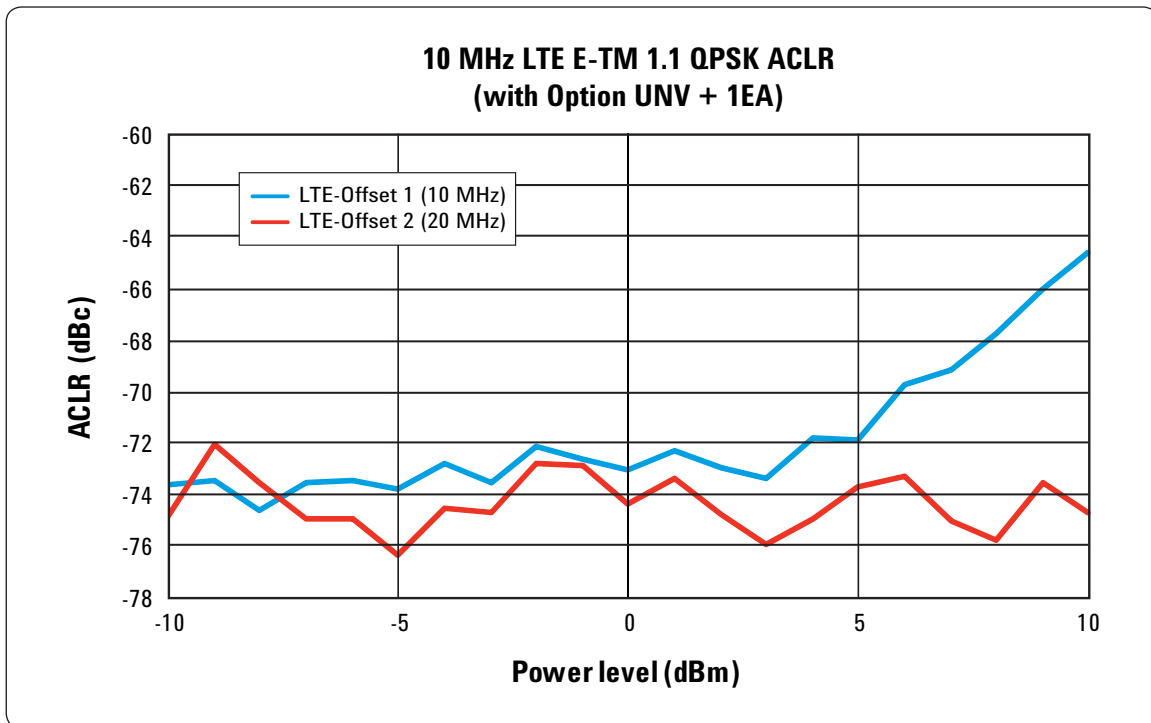



| GSM/EDGE output RF spectrum (ORFS) |                            |                                    |                   |                     |                   |                     |
|------------------------------------|----------------------------|------------------------------------|-------------------|---------------------|-------------------|---------------------|
|                                    |                            |                                    | GSM               |                     | EDGE              |                     |
| Power level                        |                            |                                    | < +7 dBm          |                     | < +7 dBm          |                     |
| Offset                             | Configuration              | Frequency <sup>1</sup>             | Standard, typical | Option UNV, typical | Standard, typical | Option UNV, typical |
| 200 kHz                            | 1 normal timeslot, bursted | 800 to 900 MHz<br>1800 to 1900 MHz | -34 dBc           | -36 dBc             | -37 dBc           | -38 dBc             |
| 400 kHz                            |                            |                                    | -69 dBc           | -70 dBc             | -69 dBc           | -70 dBc             |
| 600 kHz                            |                            |                                    | -81 dBc           | -82 dBc             | -80 dBc           | -81 dBc             |
| 800 kHz                            |                            |                                    | -82 dBc           | -83 dBc             | -82 dBc           | -83 dBc             |
| 1200 kHz                           |                            |                                    | -84 dBc           | -85 dBc             | -83 dBc           | -84 dBc             |



| 3GPP2 cdma2000 distortion performance, typical |                        |                |          |            |                  |
|--|------------------------|----------------|----------|------------|------------------|
|  |                        |                | Standard | Option UNV | Option UNV + 1EA |
| Power level <sup>2</sup>                       |                        |                | ≤ 2dBm   | ≤ 2 dBm    | ≤ 5 dBm          |
| Offset   | Configuration          | Frequency (1)  | Typical  | Typical    | Typical          |
| 885 kHz to 1.98 MHz                            | 9 channel forward link | 800 to 900 MHz | -78dBc   | -79dBc     | -77dBc           |
| > 1.98 to 4.0 MHz                              |                        |                | -86dBc   | -87dBc     | -87dBc           |
| > 4.0 to 10 MHz                                |                        |                | -91dBc   | -93dBc     | -93dBc           |





| 802.16e Mobile WiMAX™ distortion performance, measured |                     |                            |                 |                    |               |
|--|---------------------|----------------------------|-----------------|--------------------|---------------|
| Power  | Offset <sup>3</sup> | Configuration <sup>4</sup> | Frequency       | Standard, measured | UNV, measured |
| <-7 dBm  | 10 MHz              | QPSK                       | 2.5 and 3.5 GHz | -65 dBc            | -68 dBc       |
| Up to +5 dBm   | 10 MHz              | QPSK                       | 3.5 GHz         | -62 dBc            | -65 dBc       |

1. Performance evaluated at bottom, middle, and top of bands shown.
2. This is rms power. Convert from rms to peak envelope power (PEP) with the following equation:  $PEP = rms\ power + crest\ factor$  (for example: 3GPP test model 1 with 64 DPCH has a crest factor > 11 dB, therefore at +5 dBm rms the PEP = 5 dBm + 11 dB = +16 dBm PEP).
3. Measurement configuration: reference channel integration BW: 9.5 MHz, offset channel integration BW: 9 MHz, channel offset: 10 MHz.
4. 802.16e WiMAX signal configuration—bandwidth: 10 MHz, FFT: 1024, frame length: 5 ms, guard period: 1/8, symbol rolloff: 5%, content: 30 symbols of PN9 data.

| EVM performance data <sup>1,2</sup> |                                    |          |                                    |       |                                       |      |                  |       |                      |      |          |
|-------------------------------------|------------------------------------|----------|------------------------------------|-------|---------------------------------------|------|------------------|-------|----------------------|------|----------|
| Format                              | GSM                                |          | EDGE                               |       | cdma2000/1xEV-DO                      |      | W-CDMA           |       | LTE FDD <sup>3</sup> |      |          |
| Modulation type                     | GMSK (burst)                       |          | 3pi/8 8PSK (burst)                 |       | QPSK                                  |      | QPSK             |       | 64 QAM               |      |          |
| Modulation rate                     | 270.833 ksps                       |          | 70.833 ksps                        |       | 1.2288 Mcps                           |      | 3.84 Mcps        |       | 10 MHz BW            |      |          |
| Channel configuration               | 1 timeslot                         |          | 1 timeslot                         |       | Pilot channel                         |      | 1 DPCH           |       | E-TM 3.1             |      |          |
| Frequency <sup>4</sup>              | 800 to 900 MHz<br>1800 to 1900 MHz |          | 800 to 900 MHz<br>1800 to 1900 MHz |       | 800 to 900 MHz<br>1800 to 1900 MHz    |      | 1800 to 2200 MHz |       | 1800 to 2200 MHz     |      |          |
| EVM power level                     | ≤ 7 dBm                            |          | ≤ 7 dBm                            |       | ≤ 7 dBm                               |      | ≤ 7 dBm          |       | ≤ 7 dBm              |      |          |
| EVM power level with Option 1EA     | ≤ 13 dBm                           |          | ≤ 13 dBm                           |       | ≤ 13 dBm                              |      | ≤ 13 dBm         |       | ≤ 13 dBm             |      |          |
| EVM/global phase error              | Spec                               | Type     | Spec                               | Type  | Spec                                  | Type | Spec             | Type  | Measured             |      |          |
|                                     | ms 0.8 °                           | 0.2 °    | 1.2%                               | 0.75% | 1.3%                                  | 0.8% | 1.2%             | 0.8%  | 0.2%                 |      |          |
|                                     | peak 1.5 °                         | 0.6 °    |                                    |       |                                       |      |                  |       |                      |      |          |
| Format                              | 802.11a/g                          |          | 802.16e WiMAX <sup>5</sup>         |       | QPSK                                  |      | 16 QAM           |       |                      |      |          |
| Modulation type                     | 64 QAM                             |          | 64 QAM                             |       | QPSK                                  |      | 16 QAM           |       |                      |      |          |
| Modulation rate                     | 54 Mbps                            |          | 10 MHz BW                          |       | 4 Msps (root-Nyquist filter α = 0.25) |      |                  |       |                      |      |          |
| Frequency <sup>4</sup>              | 2400 to 2484 MHz                   |          | 2300 to 2690 MHz                   |       | ≤ 3 GHz                               |      | ≤ 6 GHz          |       | ≤ 3 GHz              |      | ≤ 6 GHz  |
|                                     | 5150 to 5825 MHz                   |          | 3300 to 3800 MHz                   |       |                                       |      |                  |       |                      |      |          |
| EVM power level                     | ≤ -5 dBm                           |          | ≤ 2 dBm                            |       | ≤ 4 dBm                               |      | ≤ 4 dBm          |       | ≤ 4 dBm              |      | ≤ 4 dBm  |
| EVM power level with Option 1EA     | ≤ 2 dBm                            |          | ≤ 8 dBm                            |       | ≤ 10 dBm                              |      | ≤ 10 dBm         |       | ≤ 10 dBm             |      | ≤ 10 dBm |
| EVM                                 | Measured                           | Measured | Spec                               | Type  | Spec                                  | Type | Spec             | Type  | Spec                 | Type |          |
|                                     | 0.3%                               | 0.3%     | 1.2%                               | 0.8%  | 1.9%                                  | 1.1% | 1.1%             | 0.65% | 1.5%                 | 0.9% |          |

1. EVM specifications apply for the default ARB file setup conditions with the default ARB files supplied with the instrument.
2. EVM specifications apply after execution of I/Q calibration when the instrument is maintained within ± 5 °C of the calibration temperature.
3. LTE FDD E-TM 3.1, 10 MHz, 64 QAM PDSCH, full resource block. Measured EVM after DC calibration.
4. Performance evaluated at bottom, middle, and top of bands shown.
5. 802.16e WiMAX signal configuration—bandwidth: 10 MHz, FFT: 1024, frame length: 5 ms, guard period: 1/8, symbol rolloff: 5%, content: 30 symbols of PN9 data.

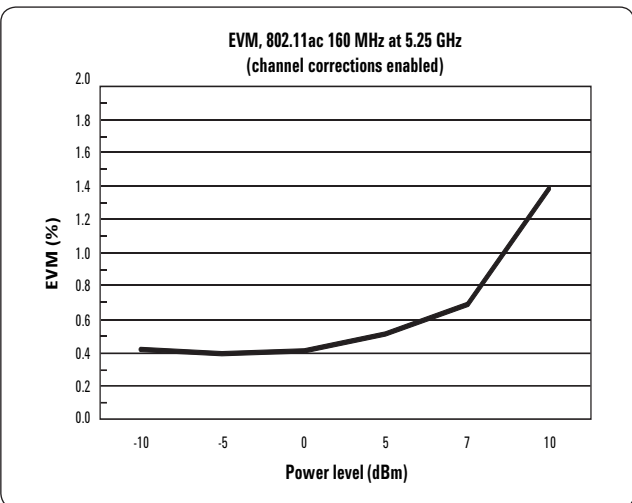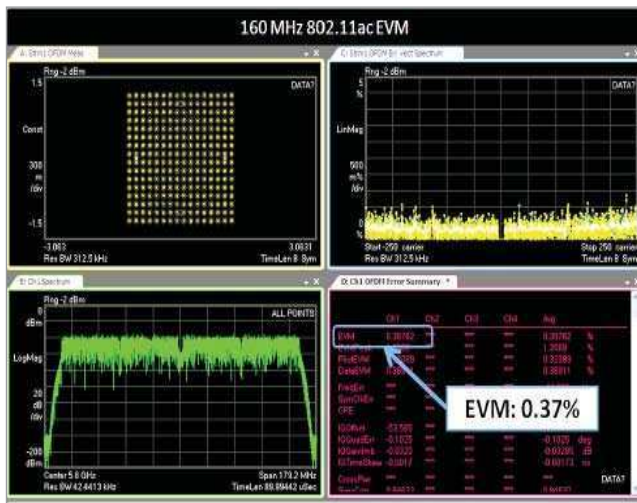

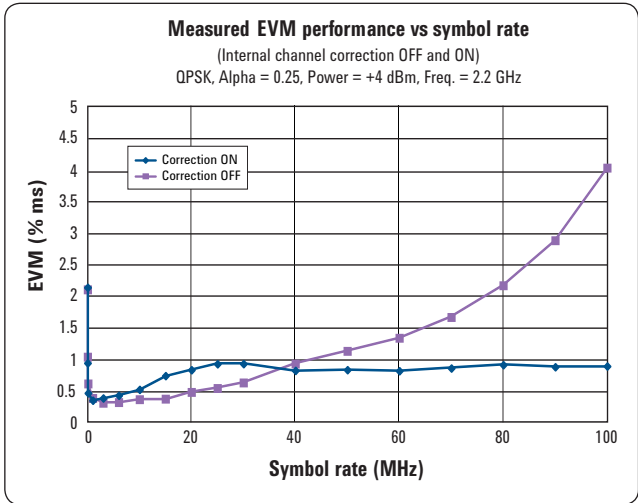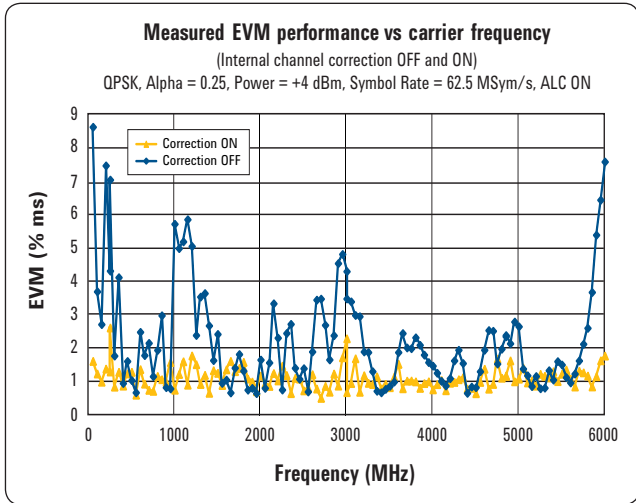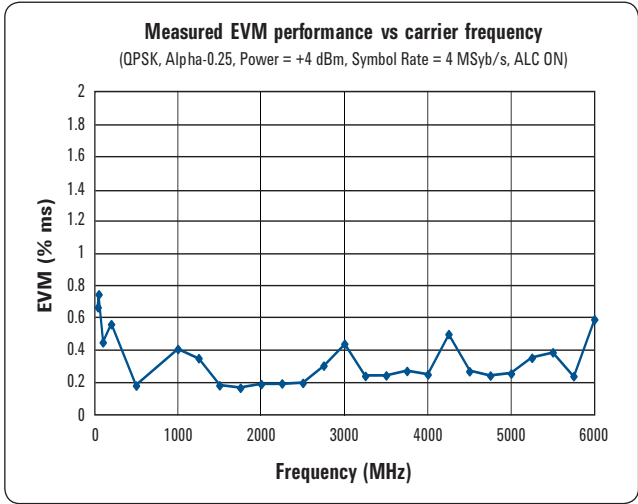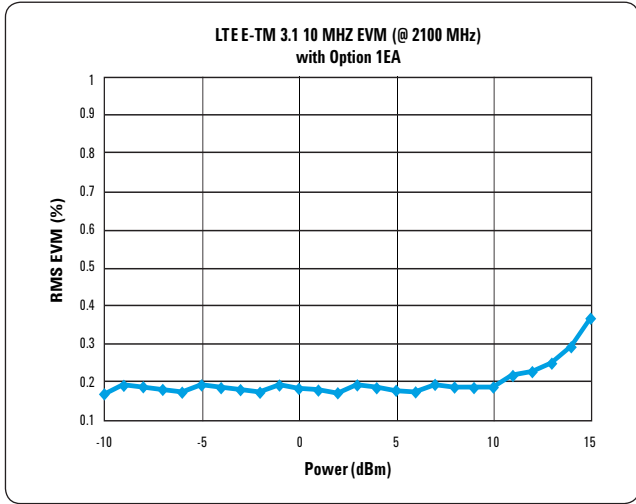

# General Specifications

| Remote programming  |  |                         |                   |             |             |                   |                 |                 |                  |              |                     |
|---|--|-------------------------|-------------------|-------------|-------------|-------------------|-----------------|-----------------|------------------|--------------|---------------------|
| Interfaces  | GPIB IEEE-488.2, 1987 with listen and talk<br>LAN 1000BaseT LAN interface, LXI class C compliant<br>USB Version 2.0  |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| Control languages   | Control languages SCPI Version 1997.0  |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| Compatibility languages   | Agilent Technologies: N5181A\61A, N 5182A\62A, N5183A, E4438C, E4428C, E442xB, E443xB, E8241A, E8244A, E8251A, E8254A, E8247C, E8257C/D, E8267C/D, 8648 Series, 8656B, E8663B, 8657A/B<br>Aeroflex Incorporated: 3410 Series<br>Rohde & Schwarz: SMB100A, SMBV100A, SMA100A, SMU200A, SMJ100A, SMATE200A, SMIQ, SML, SMV                                 |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| Power requirements  |  |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| 100-120 VAC, 50/60/400 Hz<br>220-240 VAC, 50/60 Hz<br>160 W maximum (N5181B)<br>300 W maximum (N5182B)  |  |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| Operating temperature range   |  |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| 0 to 55 °C  |  |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| Storage temperature range   |  |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| -40 to 70 °C  |  |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| Operating and storage altitude  |  |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| Up to 15,000 feet   |  |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| Environmental stress  |  |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| Samples of this product have been type tested in accordance with the Agilent Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation and end-use; those stresses include but are not limited to temperature, humidity, shock, vibration, altitude, and power line conditions; test methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class 3  |  |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| Safety  |  |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| Complies with European Low Voltage Directive 2006/95/EC   |  |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| <ul style="list-style-type: none"> <li>IEC/EN 61010-1, 2nd Edition</li> <li>Canada: CSA C22.2 No. 61010-1</li> <li>USA: UL std no. 61010-1, 2nd Edition</li> <li>German Acoustic statement</li> </ul>   | <table border="0"> <tr> <td>Acoustic noise emission</td> <td>Geraeuschemission</td> </tr> <tr> <td>LpA &lt; 70 dB</td> <td>LpA &lt; 70 dB</td> </tr> <tr> <td>Operator position</td> <td>Am Arbeitsplatz</td> </tr> <tr> <td>Normal position</td> <td>Normaler Betrieb</td> </tr> <tr> <td>Per ISO 7779</td> <td>Nach DIN 45635 t.19</td> </tr> </table> | Acoustic noise emission | Geraeuschemission | LpA < 70 dB | LpA < 70 dB | Operator position | Am Arbeitsplatz | Normal position | Normaler Betrieb | Per ISO 7779 | Nach DIN 45635 t.19 |
| Acoustic noise emission   | Geraeuschemission  |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| LpA < 70 dB   | LpA < 70 dB  |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| Operator position   | Am Arbeitsplatz  |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| Normal position   | Normaler Betrieb   |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| Per ISO 7779  | Nach DIN 45635 t.19  |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| Complies with European EMC Directive 2004/108/EC  |  |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| <ul style="list-style-type: none"> <li>IEC/EN 61326-1 or IEC/EN 61326-2-1</li> <li>CISPR Pub 11 Group 1, class A</li> <li>AS/NZS CISPR 11</li> <li>ICES/NMB-001</li> </ul>  | This ISM device complies with Canadian ICES-001;<br>cet appareil ISM est conforme a la norme NMB-001 du Canada   |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| Memory  |  |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| <ul style="list-style-type: none"> <li>Memory is shared by instrument states, user data files, sweep list files, waveform sequences, and other files</li> <li>2 GB (30 GB with Option 009) memory available in the N5182B</li> <li>Security Option 006 allows storage of up to 8 GB</li> <li>Depending on how the memory is utilized, a maximum of 1000 instrument states can be saved</li> </ul>   |  |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| Security (Option 006)   |  |                         |                   |             |             |                   |                 |                 |                  |              |                     |
| <ul style="list-style-type: none"> <li>Removable 8 GB solid state memory (SD card) from rear panel</li> <li>User can force all files to be stored only on external memory card including instrument states, user data files, sweep list files, waveforms, waveform sequences, and other files.</li> <li>Memory sanitizing, memory sanitizing on, power on, and display blanking</li> </ul> Note: Read/write speeds to external memory card will be slower compared to internal solid-state drive (Option 009) |  |                         |                   |             |             |                   |                 |                 |                  |              |                     |

### Self-test

Internal diagnostic routines test most modules in a preset condition; for each module, if its node voltages are within acceptable limits, the module passes the test

### Weight

N5181B: ≤ 13.6 kg (30 lb) net, ≤ 28.6 kg (63 lb.) shipping

N5182B: ≤ 15.9 kg (35 lb) net, ≤ 30.8 kg (68 lb.) shipping

### Dimensions

88 mm H x 458 mm W x 508 mm L

(3.46 in H x 18 in W x 20 in L)

### Recommended calibration cycle

36 months

### ISO compliant

This instrument is manufactured in an ISO-9001 registered facility in concurrence with Agilent Technologies' commitment to quality.

# Inputs and Outputs

| Front panel connectors  |   |
|---|---|
| RF output   | Outputs the RF signal via a precision N type female connector; see output section for reverse power protection information  |
| I and Q inputs  | BNC input accepts “in-phase” and “quadrature” input signals for I/Q modulation; nominal input impedance is 50 Ω, damage levels are 1 Vrms and 5 Vpeak   |
| USB 2.0   | Used with a memory stick for transferring instrument states, licenses and other files into or out of the instrument; also used with U2000 Series USB average power sensors<br>For a current list of supported memory sticks, visit <a href="http://www.agilent.com/find/X-series_SG">www.agilent.com/find/X-series_SG</a> , click on Technical Support, and refer to FAQs: Waveform Downloads and Storage |
| Rear panel connectors   |   |
| Rear panel inputs and outputs are 3.3 V CMOS, unless indicated otherwise; CMOS inputs will accept 5 V CMOS, 3 V CMOS, or TTL voltage levels |   |
| RF output (Option 1EM)  | Outputs the RF signal via a precision N type female connector   |
| I and Q inputs (Option 1EM)   | Accepts “in-phase” and “quadrature” input signals for I/Q modulation SMB connector, nominal input impedance is 50 Ω; damage levels are 1 Vrms and 5 Vpeak; Option 1EM and N5162A units will come with 2 SMB to BNC adapters   |
| I and Q outputs   | BNC outputs the analog I/Q modulation signals from the internal baseband generator; nominal output impedance 50 Ω, DC coupled; damage levels ± 2 V  |
| I bar and Q bar outputs (Option 1EL)  | BNC outputs the complement of the I and Q signals for differential applications;  |
| DAC Clk In (Option 012)   | Reserved for future use.  |
| Event 1   | This connector outputs the programmable timing signal generated by marker 1<br>The marker signal can also be routed internally to control the RF blanking and ALC hold functions; this signal is also available on the AUX I/O connector<br>This output is TTL and 3.3 V CMOS compatible<br>Damage levels are > +8 V and < -4 V   |
| Pattern trigger   | Accepts signal to trigger internal pattern generator to start single pattern output, for use with the internal baseband generators<br>Accepts CMOS signal with minimum pulse width of 10 ns<br>Female BNC<br>Damage levels are > +8 V and < -4 V  |
| BBTRIG 1  | Reserved for arbitrary and real-time baseband generators I/O such as Markers or trigger inputs  |
| BBTRIG 2  | Reserved for arbitrary and real-time baseband generators I/O such as Markers or trigger inputs  |
| Sweep out   | Generates output voltage, 0 to +10 V when the signal generator is sweeping; this output can also be programmed to indicate when the source is settled or output pulse video and is TTL and CMOS compatible in this mode; output impedance < 1 Ω, can drive 2 kΩ; damage levels are ± 15 V   |
| Ext 1   | External AM/FM/PM #1 input; nominal input impedance is 50 Ω/600 Ω/1M Ω, nominal; damage levels are ± 5 V  |
| Ext 2   | External AM/FM/PM #2 input; nominal input impedance is 50 Ω/600 Ω /1M Ω, nominal; damage levels are ± 5 V   |
| LF OUT  | 0 to 5 V peak into 50 Ω, -5 V to 5 V offset, nominal  |
| Pulse   | External pulse modulation input; this input is TTL and CMOS compatible; low logic levels are 0 V and high logic levels are +1 V; nominal input impedance is 50 Ω; input damage levels are ≤ -0.3 V and ≥ +5.3 V   |

|                     |   |
|---------------------|---|
| Trigger in          | Accepts TTL and CMOS level signals for triggering point-to-point in sweep mode; damage levels are $\leq -0.3$ V and $\geq +5.3$ V   |
| Trigger out         | Outputs a TTL and CMOS compatible level signal for use with sweep mode<br>The signal is high at start of dwell, or when waiting for point trigger in manual sweep mode, and low when dwell is over or point trigger is received<br>This output can also be programmed to indicate when the source is settled, pulse synchronization, or pulse video<br>Nominal output impedance 50 $\Omega$<br>Input damage levels are $\leq -0.3$ V and $\geq +5.3$ V  |
| Reference input     | Accepts a 10 MHz reference signal used to frequency lock the internal timebase; Option 1ER adds the capability to lock to a frequency from 1 MHz to 50 MHz; nominal input level $-3.5$ to $+20$ dBm, impedance 50 $\Omega$ , sine or square waveform  |
| 10 MHz out          | Outputs the 10 MHz reference signal used by internal timebase; level nominally $+3.9$ dBm; nominal output impedance 50 $\Omega$ ; input damage level is $+16$ dBm   |
| LO in (Option 012)  | Accepts a signal from a master signal generator that is used as the LO for MXG vector in order to configure a phase coherent system; nominal input levels between 0 to $+7$ dBm; nominal input impedance 50 $\Omega$  |
| LO out (Option 012) | Outputs a reference signal that can be used in a phase coherent system; nominal output levels between 0 to 7 dBm; nominal output impedance 50 $\Omega$  |
| Digital bus I/O     | To be used with PXB or N5102A digital signal interface module   |
| Aux IO              | 50 pin SCSI II connector; the AUX I/O connector provides additional digital signal inputs/outputs with Event 1 - 4 (Pin 1 - 4)<br>This connector outputs programmable timing signals generated by Markers 1 - 4; the marker signals can also be routed internally to control the RF blanking and ALC hold functions<br>This output is TTL and 3.3 V CMOS compatible; damage levels are $> +8$ V and $< -4$ V  |
| USB 2.0             | The USB connector provides remote programming functions via SCPI  |
| LAN (1000 BaseT)    | The LAN connector provides the same SCPI remote programming functionality as the GPIB connector and is also used to access the internal Web server and FTP server<br>Supports DHCP, sockets SCPI, VXI-11 SCPI, connection monitoring, dynamic hostname services, TCP keep alive<br>LXI class C compliant<br>Trigger response time for the immediate LAN trigger is 0.5 ms (minimum), 4 ms (maximum), 2 ms, typical; delayed/alarm trigger is unknown<br>Trigger output response time is 0.5 ms (minimum), 4 ms (maximum), 2 ms, typical |
| GPIB                | The GPIB connector provides remote programming functionality via SCPI   |

## Related Literature

### Agilent X-Series Signal Generators

*MXG Configuration Guide*  
5990-9959EN

*EXG Data Sheet* 5991-0039EN

*EXG Configuration Guide*  
5990-9958EN

*X-Series Signal Generator Brochure*  
5990-9957EN

*Signal Studio Software Brochure*  
5989-6448EN



Agilent Advantage Services is committed to your success throughout your equipment's lifetime. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair and reduce your cost of ownership. You can also use Infoline Web Services to manage equipment and services more effectively. By sharing our measurement and service expertise, we help you create the products that change our world.

[www.agilent.com/find/advantageservices](http://www.agilent.com/find/advantageservices)



[www.agilent.com/quality](http://www.agilent.com/quality)



### Agilent Email Updates

[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)

Get the latest information on the products and applications you select.



[www.lxistandard.org](http://www.lxistandard.org)

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Agilent is a founding member of the LXI consortium.

WiMAX™ is a trademark of the WiMAX Forum®.

Bluetooth® and the Bluetooth logos are trademarks owned by Bluetooth SIG, Inc, U.S.A. and licensed to Agilent Technologies, Inc.

[www.agilent.com](http://www.agilent.com)  
[www.agilent.com/find/MXG](http://www.agilent.com/find/MXG)

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

### Americas

|               |                |
|---------------|----------------|
| Canada        | (877) 894 4414 |
| Brazil        | (11) 4197 3600 |
| Mexico        | 01800 5064 800 |
| United States | (800) 829 4444 |

### Asia Pacific

|                    |                |
|--------------------|----------------|
| Australia          | 1 800 629 485  |
| China              | 800 810 0189   |
| Hong Kong          | 800 938 693    |
| India              | 1 800 112 929  |
| Japan              | 0120 (421) 345 |
| Korea              | 080 769 0800   |
| Malaysia           | 1 800 888 848  |
| Singapore          | 1 800 375 8100 |
| Taiwan             | 0800 047 866   |
| Other AP Countries | (65) 375 8100  |

### Europe & Middle East

|                |                      |
|----------------|----------------------|
| Belgium        | 32 (0) 2 404 93 40   |
| Denmark        | 45 45 80 12 15       |
| Finland        | 358 (0) 10 855 2100  |
| France         | 0825 010 700*        |
|                | *0.125 €/minute      |
| Germany        | 49 (0) 7031 464 6333 |
| Ireland        | 1890 924 204         |
| Israel         | 972-3-9288-504/544   |
| Italy          | 39 02 92 60 8484     |
| Netherlands    | 31 (0) 20 547 2111   |
| Spain          | 34 (91) 631 3300     |
| Sweden         | 0200-88 22 55        |
| United Kingdom | 44 (0) 118 972 6201  |

For other unlisted countries:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

Revised: January 6, 2012

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2012  
Published in USA, April 25, 2012  
5991-0038EN



Agilent Technologies