
AMPROBE°

Data Sheet

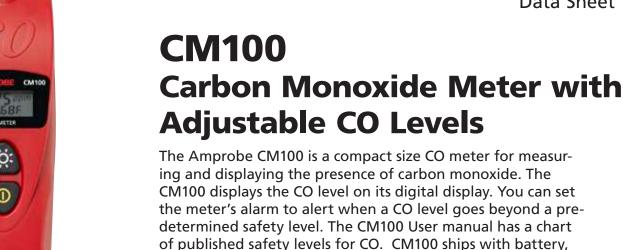

■ Adjustable CO warning level

carrying case and user manual.

- The CM100's alarm is preset to 25ppm to warn about possible danger
- User can adjust the alarm level by choosing one of these available CO gas levels: 25, 30, 35, 45, 50, 70, 100 and 200ppm
- Dual digital display
- Backlight for viewing in dim areas
- Auto Power Off
- Self-Test feature



No hassle warranty

No waiting.





(note: \$500 MSLP limit)





CM100 Carbon Monoxide Meter with Adjustable CO Levels

Data Sheet

Specifications

General Specifications	
Range	0-999 ppm
Accuracy	± 20% at 0 – 100 ppm
	± 15% at 100 – 500 ppm
	(at 20 °C +/-5%, 50 +/-20% RH)
Resolution	1ppm
Battery Life	250 hours without backlight; 35 hours with backlight
Electrical	
Battery	3 X 1.5V AAA Size (NEDA 24G or IEC R03) battery
Mechanical	
Dimension	175 x 47 x 28 mm (6.90 x 1.85 x 1.10 in)
Weight	0.128 Kg (5 oz.)
Environmental	
Operating Humidity	5-99% RH (no condensation)
Operating Temperature	-10 to 60°C/ 14 to140°F
Storage Temperature	-40 to 70°C / -40 to 158°F
Agency Approvals &	
Certifications	CE
User Documentation	
Manual	Included in the packaging

Amprobe® Test Tools

website: www.Amprobe.com email: info@amprobe.com Everett, WA 98203

Tel: 877-AMPROBE

Amprobe® Test Tools Europe

Amprobe Test Tools Europe Beha-Amprobe GmbH In den Engematten 14 79286 Glottertal, Germany Tel.: +49 (0) 7684 8009 - 0

©2008 Amprobe Test Tools. All rights reserved. 7/2008 3358020 Rev A