

FLUKE®

**Fluke 54100 Video Signal Generator
Fluke 54200 TV Signal Generator**



The purest signals, the widest choice



It's all you need for accurate multi-standard video and TV signal testing

Meet the 54000 Series from Fluke, a range of easy to use instruments to test TVs, VCRs, set top boxes and other video equipment. According to any video standard. And with today's widest choice of highly accurate signals.

Covers all video standards

- Meets CCIR, EBU, FCC, ITU and EIA analog television standards
- More than 500 digitally generated test patterns for PAL, NTSC and SECAM, including 16:9 and 4:3 aspect ratios
- High precision setting and indication for video, chrominance and RF amplitudes
- Very stable RF terrestrial output with internal/external modulation, group delay pre-correction and a level up to 100 mV

Two models

There are two compact models in the series. The Fluke 54100 Video Signal Generator is the obvious choice for testing video circuitry. The Fluke 54200 TV Signal Generator offers additional sound test signals and a highly stable RF output, making it ideal for complete testing of TV sets, VCRs or other related equipment. Both models offer selectable TV standards (PAL, NTSC, SECAM), text functions and a choice of signal outputs. You can choose from a number of readily available pre-configurations, or select an instrument that precisely matches your testing requirements, specifying options from a range of stereo sound, data services and interface functions. You'll find all details on the separate option and ordering information inserts.

All applications

The digitally generated test signals of the Fluke 54000 Series comply with the recommendations of the CCIR, EBU, FCC, ITU and EIA standards for analog television. This versatility, combined with the high signal quality (stability and purity) makes them ideal for testing TV receivers, VCRs, camcorders, observation systems and set-top decoder boxes, and also for checking the performance of individual sub-assemblies or components used in these products.

Easy to Use

These generators are excellent examples of Fluke's reputation for easy-to-use instruments:

- Select the main functions directly on the front-panel keyboard. More advanced functions can be accessed using soft keys and the large LCD (Liquid Crystal Display) with its familiar graphical interface.
- Accurately set luminance and chrominance amplitudes with the up and down keys or the numerical keyboard.
- Store up to 99 different test situation settings for later instantaneous recall.
- Finally, to make it even more convenient, a number of country specific settings have been pre-programmed. Just think of the time this will save you.

Just what you need

Whether you work in development, production, quality assurance, installation, maintenance or repair, there's always a model to suit your needs, thanks to the standard capabilities of these instruments, together with the range of options. Their ease of use and compact size makes them ideal, both for personal use on the bench and for use by a group of engineers. Need to make automated measurements? It's simple with the Fluke 54000 Series, as you can remotely control *all* functions via the optional combined IEEE-488 (GPIB) and RS-232 interface.





Multi or single standard

The Fluke 54100 Video Signal Generator and the Fluke 54200 TV Signal Generator are available with PAL, NTSC and/or SECAM video standard options. You can select any combination of these standards to create a single, double or triple standard unit. The appropriate sub standards (system B, D, G, I, K, K1, L, M or N) are enabled automatically.

Wide range of patterns

The Fluke 54000 Series are today's most versatile generators. On all models you will find the test patterns and capabilities you'll need to test and align the total video signal path. There are over 500 test patterns – for calibrating geometry (in 4:3 and 16:9 aspect ratios), synchronization, focusing, static and dynamic convergence. You'll find signals for checking bandwidth, interference (such as cross-color), amplitude response, tracking and clipping. As well as for color reproduction, cut-off setting, high-voltage stability, analog-to-digital conversion, and much more. And your test results will always be reliable, as all test patterns are digitally generated to ensure high stability and precise timing.

Stable RF output (Fluke 54200 only)

You need to do tuner and IF tests? The terrestrial output on the Fluke 54200 TV Signal Generator is just what you need. Its highly stable signal covers the entire RF frequency range from 32 to 900 MHz. And you can set the frequency directly with 50 kHz resolution. For fast and precise reference, you can enter the amplitude either in mV or dB μ V and the maximum output level is as high as 100 mV for the entire bandwidth. Group delay pre-correction, also known as group delay filtering, allows you to test applications that need accurate luminance and chrominance timing.

Technical Specifications



Fluke 54100 Video Signal Generator



Fluke 54200 TV Signal Generator

OUTPUTS

CVBS VIDEO

Voltage (V_{pp} in 75Ω): 1V (nominal setting)
 Setting range: 0 to 1.5V
 Tolerance: 5%, 2% for nominal setting at reference temperature
 Resolution: 10 mV
 Impedance: 75Ω
 Polarity: Positive, negative
 Coupling: DC

CVBS SYNC, LINE SYNC and FIELD SYNCHRONISATION

Voltage (V_{pp} in 75Ω): 2V
 Tolerance: 0.3V
 Impedance: 75Ω
 Polarity: Negative
 Coupling: DC

EURO AV CONTROL VOLTAGES

Aspect Ratio: Automatically or off
 Fast Blanking: Automatically or off

TERRESTRIAL RF CARRIER (54200 only)

Frequency: 32 to 900 MHz
 Tolerance: 10 kHz
 Resolution: 50 kHz
 Spectral purity: ≤ -60 dBc inside actual TV channel
 ≤ -30 dBc outside actual TV channel
 Voltage (V_{rms} in 75Ω): 100 mV for high range
 10 mV for low range
 Attenuation: 0 to 80 dB for high range
 0 to 60 dB for low range
 Readout: mV, dBμV
 Resolution: 0.01 mV for voltage ≤ 10 mV
 0.1 mV for voltage > 10 mV
 1 dB for dBμV indication
 Tolerance: 3 dB
 Flatness: ≤ 2 dB for 32 to 900 MHz
 Impedance: 75Ω
 Modulation: Double sideband AM
 Internal, external
 Group delay: 2 different types (or off)

INPUTS

VIDEO IN (54200 only)

Voltage (V_{pp}): 1V (nominal)
 Impedance: 75Ω
 Polarity: Positive
 Coupling: DC

VIDEO

SYNCHRONISATION

Reference: CCIR Rep. 624-4, 1990
 ANSI/ SMPTE 170M-1994
 System: 625 lines (50 Hz)
 525 lines (59.94 Hz)
 Line frequency: 15.625 kHz for 625 line system
 15.734265 kHz for 525 line system
 Tolerance: 3 ppm for +5 to +45 °C
 1 ppm at reference temperature
 Aging: ≤ 2 ppm per year
 Level: -43% for 625 line system
 -40 IRE for 525 line system
 Tolerance: 3% for 625 line system
 3 IRE for 525 line system

LUMINANCE

Reference: CCIR Rep. 624-4, 1990
 ANSI/ SMPTE 170M-1994
 Blanking level: 0% (0 IRE)
 Black level: 0% for 625 line system
 +7.5 IRE for 525 line system
 White level: 100% (100 IRE)
 Tolerance: 2% for 625 line system
 2 IRE for 525 line system

CHROMINANCE







Reference: CCIR Rep. 624-4, 1990
 ANSI/SMPTE 170M-1994
 System: PAL B, D, G, I, K, M, N
 NTSC M
 NTSC with 4.433619 MHz
 SECAM B, D, G, K, K1, L
 Carrier frequency: 4.433619 MHz for PAL B, D,
 G, I, K and NTSC 4.43
 3.575611 MHz for PAL M
 3.582056 MHz for PAL N
 3.579545 MHz for NTSC M
 4.406250 and
 4.250000 MHz for SECAM
 Tolerance: 3 ppm for +5 to +45 °C
 1 ppm at reference temperature
 Aging: ≤ 2 ppm per year
 Phase tolerance (PAL/NTSC): 2°, 1° at reference temperature
 Level: 100% (nominal setting)
 Setting range: 0% to 150%
 Resolution: 1%

Values stated without tolerances are typical values



Technical Specifications (cont.)

PATTERNS

| | |
|----------------------|--|
| Reference: | ITU Rec. 471-1/1994 and SMPTE EG27-1994 for color bar SMPTE EG1-1990 for SMPTE color bar CCIR Rec. 473-5, 1990 and CCIR Rec. R26-1981 for IRS 17 CCIR Rec. 473-5, 1990 for multi burst CCIR Rep. 1221 for PLUGE |
| Aspect ratio: | 4:3, 16:9 |
| Circle: | 4 additional circles in 16:9 mode |
| Center cross: | With border castellations (overscan indication selectable between 2% or 3%) |
| White: | 0, 5, 15 to 100% (5% steps) for 625 line system 7.5, 15 to 100 IRE (5 IRE steps) for 525 line system |
| Purity: | Red, green, blue, cyan, magenta, yellow, white, black (100/0/75/0 for 625 line system and 100/7.5/75/7.5 for 525 line system) |
| Dots: | 17x13 dots in 4:3 mode, 23x13 dots in 16:9 mode With center indication |
| Crosshatch: | 18x14 lines in 4:3 mode, 24x14 lines in 16:9 mode With center and top/left indication (selectable) |
| Checkerboard: | 12x9 squares in 4:3 mode, 16x9 squares in 16:9 mode |
| PLUGE: | -1.6, 0, 1.6, 100% for 625 line system 4.8, 7.5, 10.7, 100 IRE for 525 line system |
| Grey scale: | 10 steps linear staircase |
| VCR: | VCR test (2 types) Resolution test (2 types) Writing current |
| Multi burst: | 0.5, 1.0, 2.0, 4.0, 4.8, 5.8 MHz for 625 line system 0.5, 1.0, 2.0, 3.0, 3.58, 4.2 MHz for 525 line system |
| Digital scan: | With time intervals ADC check (2 types) Moving block |
| Color bar: | Progressive scan check (3 types) 75/0/75/0, 100/0/75/0, 75/0/100/25, 100/0/100/25 for 625 line system 75/7.5/75/7.5, 100/7.5/75/7.5 for 525 line system SMPTE color bar Horizontal color bar (75/0/75/0 for 625 line system and 75/7.5/75/7.5 for 525 line system) |
| DEM: | Demodulator test (2 types) |
| Color temperature: | 3 different sizes with adjustable levels for center and border |
| Diverse: | EHT test (Reference rectangle with switching white/black window) IRS 17 (Available as full field test pattern as well as reference line 17, only for 625 line system) |
| Pattern combination: | Circle with every other pattern (except progressive scan) or combination Center cross / crosshatch / dots / purity Grey scale / white / multi burst / color bar |

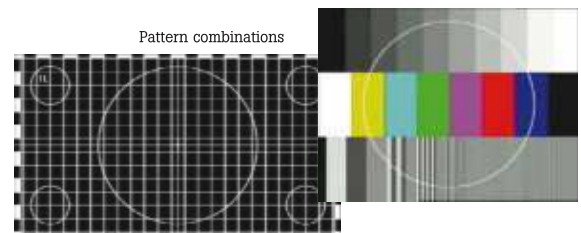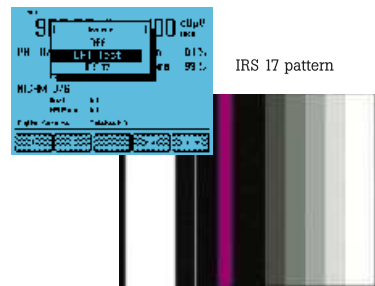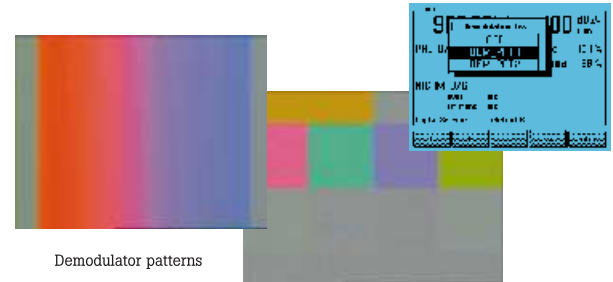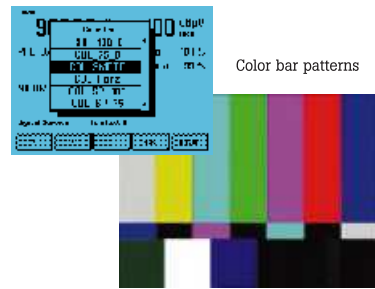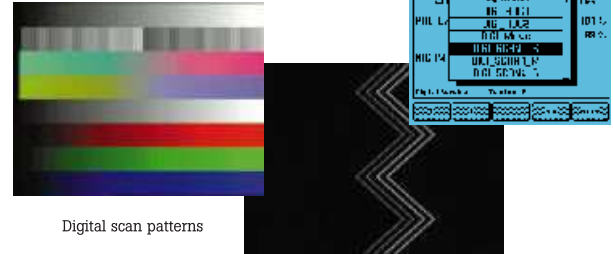

That sounds just right....

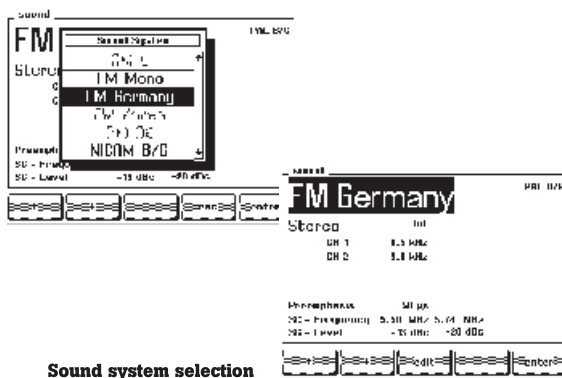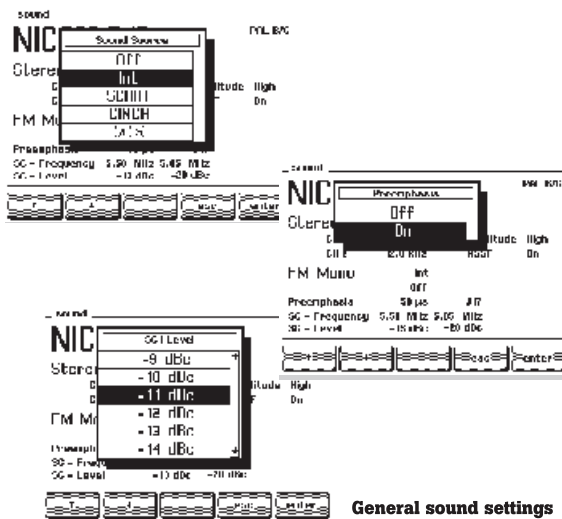

Push-button mono sound test signals

To help you test the mono sound capabilities of TV receivers and VCRs, standard audio test signals are available with every selected stereo sound option on the Fluke 54200 TV Signal Generator. Several tone frequencies allow you to test the complete path for audio sound. Operation is simple, as you can select the main sound test functions directly on the front panel. More specific settings, such as sound carrier level, frequency and pre-emphasis, can be modified via soft keys.

Multi-system analog stereo

The analog stereo option supports various two-carrier analog stereo systems, including BG, A2 and Mk stereo. The B and G stereo systems are often referred to as German or 'Zweiton' stereo. A2 stereo is used in combination with both SECAM and PAL television standards. It is transmitted in several eastern European countries and is also known as PAL/SECAM system DK stereo. Mk is a two-carrier NTSC stereo sound system and is used in Korea. For all these two-carrier stereo systems, the analog stereo option generates the appropriate pilots and delivers tone frequencies in mono, stereo or dual mode. Tone frequencies of 0.5, 1.0 and 3.0 kHz are included and for system M and N the lowest frequency is 0.3 kHz. Using these analog sound functions, you can test a variety of audio parameters, such as channel separation, signal to noise and harmonic distortion. All signals are generated digitally, to ensure high signal stability and purity.


- Analog stereo containing German, Korean and DK stereo
- NICAM stereo
- BTSC sound test signals (MTS Stereo plus SAP)

Versatile NICAM digital sound


If you need digital sound capabilities, you should specify this option. NICAM, also available in SECAM, is compatible with the existing PAL terrestrial TV and cable TV standards, and adds two high-quality digital sound channels. Suitable TV sets can receive two mono channels (this is called dual channel) for simultaneous translation of foreign-language programs, stereo signals or transparent transmission of data. The option provides mono, stereo and dual tone modes to check the digital sound performance. For channel 1, tone frequencies of 0.5, 1.0, 1.5 and 3.0 kHz are available, while you can modulate channel 2 with a signal frequency of 1.0, 1.5, 3.0 and 12 kHz. Both digital sound channels have selectable low- or high-amplitude signals to test the NICAM expander of the TV receiver. You can check the operation of the QPSK demodulator and NICAM decoder with three special test signals. You can also use these to perform a level adjustment or measurement. A high/low selectable RSSF (Reserve Sound Switching Flag) indicates that the analog (mono) and digital sound carriers are transmitting different information, or that there are errors in the digital transmission.

BTSC sound (MTS Stereo plus SAP)

In combination with NTSC and PAL TV standards, this sound option generates BTSC sound signals or Multi channel Television Sound (MTS). Apart from mono and stereo sound, a Second Audio Program (SAP) is also available. You can select various test tone frequency (0.3, 1.0 and 3.0 kHz) and mode combinations, as well as special test signals. These special test signals give you an easy functional test for channel separation, signal to noise ratio, level gaining and harmonic distortion of the stereo and SAP decoders. All sound signals are digitally generated which ensures high stability, and they are available both at the RF output or, via baseband processing, at the precision MPX output.

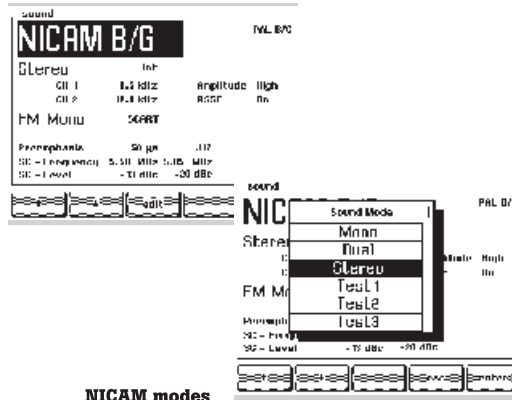

NICAM modes

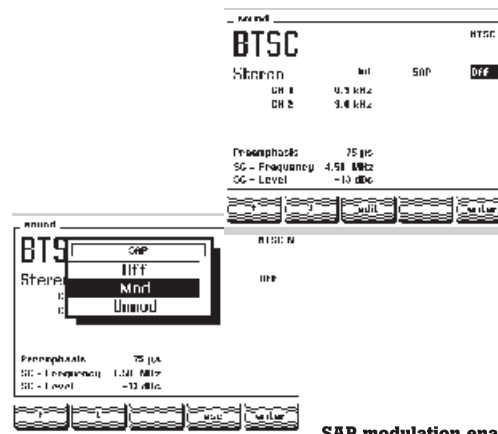

SAP modulation enabling

Technical specifications

OUTPUTS SOUND CARRIER

| | |
|-----------------------------------|---|
| Voltage (V _{pp} in 50Ω): | 142 mV for mono carrier and system B, G 200 mV for mono carrier and system D, I, K, K1, L, M, N 63.2 mV for stereo and NICAM (system B, D, G, I, K) carrier 28.3 mV for NICAM (system L) carrier |
| Setting range: | 112.5 to 356 mV for mono carrier 28.3 mV, 35.6 mV, 63.2 mV for stereo and NICAM carrier |
| Tolerance: | 2 dB |
| Resolution: | 1 dB |
| Impedance: | 50Ω |
| Connector: | BNC rear |

AUDIO and EURO AV

| | |
|---|--------------------------|
| Voltage (V _{rms} in open circuit): | 500 mV |
| Tolerance: | 5% |
| Impedance: | 600Ω |
| Connector: | Cinch rear, EURO AV rear |

BTSC MPX and FM STEREO PILOT

| | |
|---|----------|
| Voltage (V _{rms} in open circuit): | 550 mV |
| Tolerance: | 5% |
| Impedance: | 600Ω |
| Connector: | BNC rear |

NICAM DATA and NICAM CLOCK

| | |
|-----------------------------------|---|
| Frequency: | 728 kHz |
| Tolerance: | 3 ppm for +5 to +45°C 1 ppm at reference temperature ≤ 2 ppm per year |
| Aging: | |
| Voltage (V _{pp} in 50Ω): | 1V |
| Tolerance: | 10% |
| Impedance: | 50Ω |
| Connector: | BNC rear |

INPUTS

AUDIO, EURO AV and MTS

| | |
|------------------------------|------------------------------------|
| Voltage (V _{rms}): | 500 mV (nominal) |
| Impedance: | 0.1 MΩ |
| Connector: | Cinch rear, EURO AV rear, BNC rear |

MONO SOUND CARRIER

| | |
|----------------|--|
| Frequency: | 4.5 MHz for system M, N 5.5 MHz for system B, G 6.0 MHz for system I 6.5 MHz for system D, K, K1, L |
| Tolerance: | 3 ppm for +5 to +45°C 1 ppm at reference temperature ≤ 2 ppm per year |
| Aging: | |
| Level: | -13 dBc for system B, D, G, K, K1 -10 dBc for system I, L, M, N |
| Setting range: | -5 to -15 dBc |
| Tolerance: | 2 dB at reference temperature |
| Resolution: | 1 dB |

MODULATION

| | |
|-------------------|--|
| Frequency: | 0.5, 1.0, 3.0 kHz for system B, D, G, I, K, K1, L 0.3, 1.0, 3.0 kHz for system M, N FM for system B, D, G, I, K, K1, M, N AM for system L |
| Type: | |
| Deviation: | 27 kHz for system B, D, G, I, K, K1 13.5 kHz for system M, N |
| Tolerance: | 5% |
| Pre-emphasis: | 50 μs for system B, D, G, I, K, K1 75 μs for system M, N |
| Modulation depth: | 54% for system L |

STEREO SOUND CARRIER 1

| | |
|-------|---------|
| Data: | As Mono |
|-------|---------|

SOUND CARRIER 2

| | |
|----------------|--|
| Frequency: | 5.7421875 MHz for system B, G 6.2578125 MHz for system D, K (A2) 4.724 MHz for system Mk |
| Tolerance: | 3 ppm for +5 to +45°C 1 ppm at reference temperature ≤ 2 ppm per year |
| Aging: | |
| Level: | -20 dBc |
| Setting range: | -20, -25, -27 dBc |
| Tolerance: | 3 dB at reference temperature |

MODULATION

| | |
|---------------|--|
| Frequency: | 0.5, 1.0, 3.0 kHz for system B, D, G, K 0.3, 1.0, 3.0 kHz for system Mk FM |
| Type: | |
| Deviation: | 27 kHz for system B, D, G, K 13.5 kHz for system Mk |
| Tolerance: | 5% |
| Pre-emphasis: | 50 μs for system B, D, G, K 75 μs for system Mk |

Technical specifications (cont.)

IDENTIFICATION

Reference: CCIR Rec. 707
 Frequency: f_{H} / 133 for stereo and system B, D, G, K
 f_{H} / 105 for stereo and system M
 f_{H} / 57 for dual
 Tolerance: 3 ppm for +5 to +45°C
 1 ppm at reference temperature
 Aging: ≤ 2 ppm per year
 Type: AM
 Modulation depth: 50%
 Tolerance: 5%

NICAM STEREO SOUND CARRIER 1

Data: As Mono

SOUND CARRIER 2

Frequency: 5.85 MHz for system B, D, G, K, L
 6.875 MHz for system D, K
 6.552 MHz for system I
 Tolerance: 3 ppm for +5 to +45°C
 1 ppm at reference temperature
 Aging: ≤ 2 ppm per year
 Level: -20 dBc for system B, D, G, I, K
 -27 dBc for system L
 Setting range: -20, -25, -27 dBc
 Tolerance: 3 dB at reference temperature

MODULATION

Reference: NICAM-728
 CCITT Rec J17
 Frequency: 0.5, 1.0, 1.5, 3.0 kHz for channel 1
 1.0, 1.5, 3.0, 12 kHz for channel 2
 Demodulator pattern
 Decoder pattern
 Unmodulated carrier
 Type: QPSK
 Mode: Mono, Dual, Stereo, Test
 Bit-rate: 728 kbits/s
 Tolerance: 3 ppm for +5 to +45°C
 1 ppm at reference temperature
 Aging: ≤ 2 ppm per year
 Level: High, low
 RSSF: On, off

BTSC STEREO SOUND CARRIER

Frequency: 4.5 MHz for system M, N
 Tolerance: 3 ppm for +5 to +45°C
 1 ppm at reference temperature
 Aging: ≤ 2 ppm per year
 Level: -10 dBc
 Setting range: -5 to -15 dBc
 Tolerance: 2 dB at reference temperature
 Resolution: 1 dB

MODULATION

Frequency: 0.3, 1.0, 3.0 kHz for channel 1
 1.0, 3.0 kHz for channel 2 (3.1 and 8.0 kHz in Test modes)
 5.0 kHz for SAP (0.3 and 1.0 kHz in Test modes)
 Type: FM with BTSC base band
 Base band: Main channel
 Identification pilot
 Stereo sub channel
 SAP sub channel
 Base band type: FM modulated (BTSC compressed) for stereo sub channel
 AM modulated with suppressed carrier (BTSC compressed) for SAP subchannel
 Mode: Mono, stereo, SAP
 Tolerance: 5%
 Pre-emphasis: 75 μ s

IDENTIFICATION

Frequency: f_{H}
 Tolerance: 3 ppm for +5 to +45°C
 1 ppm at reference temperature
 Aging: ≤ 2 ppm per year

Fluke Corporation


P.O. Box 9090, Everett, WA 98206

Fluke Europe B.V.


P.O. Box 1186,
 5602 BD Eindhoven,
 The Netherlands

For more information call:
 In the U.S.A.: (800) 443-5853
 or Fax: (425) 356-5116
 In Europe/M-East:
 +31 (0)40 2 678 200
 or Fax: +31 (0)40 2 678 222
 In Canada: (905) 890-7600
 or Fax: (905) 890-6866
 From other countries:
 +1(425) 356-5500
 or Fax: +1 (425) 356-5116
 Web access: <http://www.fluke.com>


Making the right connections





RGB signals



YCrCb signals



YC signals

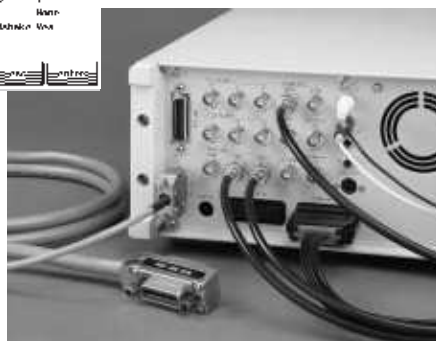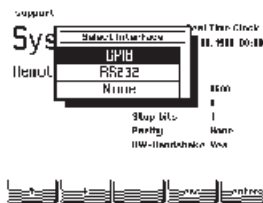

Fully programmable via IEEE-484 and RS-232

Multiple outputs

For some measurements, a composite video signal is not enough. So, the Fluke 54000 Series' RGB, YC and YCrCb option gives you additional separate output signals for red, green and blue (RGB), luminance (Y), chrominance (C) and component outputs Cr and Cb. The RGB and YC signals are available at separated connectors and on the EURO AV (SCART) connector. The RGB signal is ideal to control devices such as components or subassemblies directly at color decoded level. You can even include synchronization signals in the individual RGB signals. You'll need the YC output signals – which are also provided via a special connector and cable – for testing the S-VHS/Hi-8 input of video recorders. These VCRs eliminate cross-color effects by separately processing the Y and C signals, which gives better color reproduction. The component outputs Cr and Cb (also known as R-Y and B-Y) are phase related to U and V ($U = 0.49 \times Cb$, $V = 0.88 \times Cr$). These component signals are used in the professional video area and in applications where color conversions or pattern processing are tested.

Fully programmable

You can include the Fluke 54000 Series generators in an automated test environment with the interface option. Offering a combined IEEE-488 and RS-232 interface, this option makes the instrument fully programmable from a remote location. The IEEE-488 interface often forms the basis of fully automated test environments, while the RS-232 serial interface is mostly used to control the instrument economically from a PC in a stand alone application. All the instrument's standard, function and mode settings can be changed or retrieved via the IEEE-488 or RS-232 interface.

Interface options

- RGB, YC (S-VHS/Hi-8), YCrCb output signals available
- Fully programmable via combined IEEE-488 and RS-232 interface

Technical specifications

RGB OUTPUTS

Voltage (V_{pp} in 75Ω): 700 mV
 Tolerance: 5%
 2% at reference temperature
 Impedance: 75Ω
 Polarity: Positive
 Coupling: DC
 Blanking level: 0V
 Offset: ± 200 mV
 Synchronisation: Selectable in R, G, B or off (only
 for BNC outputs)
 Connector: BNC rear,
 EURO AV rear

YC OUTPUTS

Luminance voltage
 (V_{pp} in 75Ω): 1V
 Tolerance: 5%
 2% at reference temperature
 Coupling: DC
 Blanking level: 0V
 Offset: ± 200 mV
 Chrominance level: 100%
 Tolerance: 5%
 2% at reference temperature
 Impedance: 75Ω
 Polarity: Positive
 Coupling: AC
 Connector: S-VHS rear,
 EURO AV rear

YCrCb OUTPUTS

Voltage (V_{pp} in 75Ω): 700 mV
 Tolerance: 5%
 2% at reference temperature
 Impedance: 75Ω
 Polarity: Positive
 Coupling: DC
 Blanking level: 0V
 Offset: ± 200 mV
 Connector: BNC rear

IEEE-488 INTERFACE

Allows selection and control of all functions
 Reference: ANSI/IEEE Std. 488-1987
 Compatibility: IEEE-488.2-1987
 Interface functions: AH1, SH1, L4, T6, RL1, SR1, DC1
 Connector: Amphenol rear (RFI/EMI shielded)

RS-232 INTERFACE

Allows selection and control of all functions
 Command set As IEEE-488 interface
 Baud rate: 110 to 19200
 Data bits: 7, 8
 Stop bits: 1, 2
 Parity check: Odd, even, no
 Handshake: Software, hardware
 Connector: 9 pin D-type rear (male)

Fluke Corporation

P.O. Box 9090, Everett, WA 98206


Fluke Europe B.V.

P.O. Box 1186,
 5602 BD Eindhoven,
 The Netherlands


For more information call:
 In the U.S.A.: (800) 443-5853
 or Fax: (425) 356-5116
 In Europe/M-East:
 +31 (0)40 2 678 200
 or Fax: +31 (0)40 2 678 222
 In Canada: (905) 890-7600
 or Fax: (905) 890-6866
 From other countries:
 +1(425) 356-5500
 or Fax: +1 (425) 356-5116
 Web access: <http://www.fluke.com>

©Copyright 1998 Fluke Corporation.
 All rights reserved.

Reading between the lines

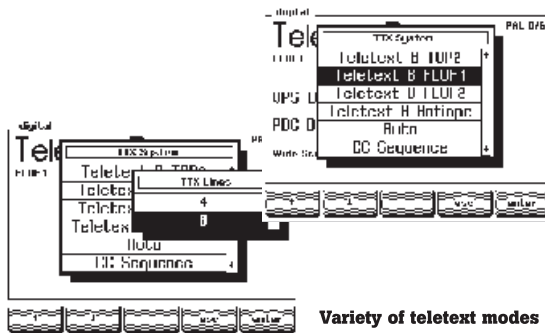

Variety of teletext modes

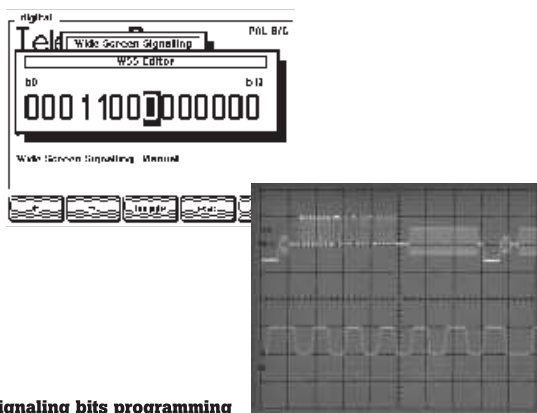

Wide Screen Signaling bits programming

Powerful teletext capabilities

With this data services option, you add powerful teletext test capabilities to your Fluke 54000 Series instrument to meet the highly specialized requirements for checking and aligning teletext receivers and decoders. You will have a selection of over ten teletext pages with special contents for decoder testing at your disposal, for use with the PAL and/or SECAM standards. This option also supports Wide Screen Signaling (WSS) and includes Didon Antiope teletext signals as well as test facilities for FLOF (Full Level One Features), TOP (Table Of Pages) and VPT (Video Programming by Teletext).

Wide Screen Signaling support

The need for additional signaling has increased substantially, because of the variety of broadcast transmissions and television set capabilities. The Wide Screen Signaling (WSS) bits are present in line 23 of the video signal and contain information about the aspect ratio, audio and data services of the transmission. With WSS, which is included with the teletext option, your Fluke 54000 Series generator automatically transmits the appropriate signaling according to the generator setting. In manual mode, you can program the WSS bits independently to set them to your specific requirements.

- Teletext (TOP, FLOF and VPT)
- Wide Screen Signaling (WSS) bits support
- Easy programmable Program Delivery Control (PDC) and Video Program System (VPS) test functions
- Closed Caption (line 21 data services) testing

Technical specifications

WSS

Reference: ETSI, ETS 300 294, November 1994
PALplus system description, Revision 3.0,
January 1994
Rec. ITU-R BT.1119

System: 625 line system
Data line: 23 (field 1)
Signalling method: Bi-phase coding, NRZ-L
Clock frequency: 5 MHz
Tolerance: 3 ppm for +5 to +45 °C
1 ppm at reference temperature
Aging: ≤ 2 ppm per year
Level: 500 mV for '1' at 700 mV maximum video
level
Black level for '0'
Tolerance: 5% for '1'
3% of sync amplitude for '0'

PDC

Reference: EBU SPB 459 Revision 2
Specification of the domestic video Program
Delivery Control system
February 1992

System: TELETEXT UK (CCIR system B)
Programming: All parameters
Labeling: Single, multi

VPS

Reference: Technische Richtlinie ARD/ZDF
Nr. 8 R 2
Video Program System
EBU SPB 459 Revision 2
Specification of the domestic video Program
Delivery Control system
February 1992

System: 625 line system
Data line: 16
Signalling method: Bi-phase modulation
Clock frequency: 5.0 MHz
Tolerance: 3 ppm for +5 to +45 °C
1 ppm at reference temperature
Aging: ≤ 2 ppm per year
Level: 500 mV for '1' at 700 mV maximum video
level
Black level for '0'
Tolerance: 5% for '1'
3% of sync amplitude for '0'
Programming: All parameters

CLOSED CAPTION

Reference: FCC 47 CFR Part 15
Report No: E-7709-C
Draft EIA-608

System: 525 line system
625 line system
Data line: 21 (field 1 and field 2)
Signalling method: Binary NRZ
Clock frequency: 503.4965 kHz for 525 line system
500 kHz for 625 line system
Tolerance: 3 ppm for +5 to +45 °C
1 ppm at reference temperature
Aging: ≤ 2 ppm per year
Level: 50 IRE (50%) for '1'
0 IRE (0%) for '0'
Tolerance: 5 IRE for '1'
1 IRE for '0'
Operation mode: CC1 to CC4
T1 to T4

TELETEXT DIDON ANTIPOE (CCIR system A)

Reference: CCIR Rec. 653-1
CCIR Doc. 11/345-E

System: 625 line system
Data line: 20, 21, 333, 334
Signalling method: Binary NRZ
Clock frequency: 6.203125 MHz
Tolerance: 3 ppm for +5 to +45 °C
1 ppm at reference temperature
Aging: ≤ 2 ppm per year
Level: 7/3 of sync amplitude for '1'
Black level for '0'
Tolerance: 0 to -10% for '1'
3% of sync amplitude for '0'

TELETEXT UK (CCIR system B)

Reference: CCIR Rec. 653-1
CCIR Doc. 11/282-E

System: 625 line system
Data line: 13, 14, 20, 21, 326, 327, 333, 334 for 8
line mode
20, 21, 333, 334 for 4 line mode

Signaling method: Binary NRZ
Clock frequency: 6.9375 MHz
Tolerance: 3 ppm for +5 to +45 °C
1 ppm at reference temperature
Aging: ≤ 2 ppm per year
Level: 66% of the difference between black level
and peak white level
Black level for '0'
Tolerance: 6% for '1'
2% of sync amplitude for '0'

Fluke Corporation

P.O. Box 9090, Everett, WA 98206

Fluke Europe B.V.

P.O. Box 1186,
5602 BD Eindhoven,
The Netherlands

For more information call:
In the U.S.A.: (800) 443-5853
or Fax: (425) 356-5116
In Europe/M-East:
+31 (0)40 2 678 200
or Fax: +31 (0)40 2 678 222
In Canada: (905) 890-7600
or Fax: (905) 890-6866
From other countries:
+1(425) 356-5500
or Fax: +1 (425) 356-5116
Web access: <http://www.fluke.com>

©Copyright 1998 Fluke Corporation.
All rights reserved.

Ordering Information

| Fluke 54200 TV Signal Generator, including RF Output and Analog Sound | Multi standard | | | | Dual Standard | | | | Single standard | | | | | | | | |
|--|---------------------|--------------|--------------|--------------|---------------|--------------|--------------|--------------|-----------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| | PAL, NTSC, SECAM | | | | PAL, NTSC | | PAL, SECAM | | PAL | NTSC | SECAM | | | | | | |
| | 54200M01/nnn | 54200M02/nnn | 54200M03/nnn | 54200M04/nnn | 54200PN1/nnn | 54200PN2/nnn | 54200PN3/nnn | 54200PN4/nnn | 54200PS1/nnn | 54200PS2/nnn | 54200PS3/nnn | 54200P01/nnn | 54200P02/nnn | 54200N01/nnn | 54200N02/nnn | 54200S01/nnn | 54200S02/nnn |
| RF Output 32....900 MHz | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| Analog stereo sound | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| Teletext, PDC, VPS | • | | | | • | | | | • | | | • | | | | • | |
| Closed Caption | • | | | | | • | | | | | | | | • | | | |
| Nicam Sound | • | • | | | | | | | | | | • | | | | • | |
| BTSC Sound | • | • | | | | • | | | | | | | | • | • | | |
| RGB, Y/C, YCrCb, IEEE, RS-232 | • | • | • | | • | • | • | | • | • | | • | • | • | • | • | • |

| Fluke 54100 Video Signal Generator | Multi standard | | | Dual Standard | | | | Single standard | | | | | | |
|---------------------------------------|-----------------------|--------------|--------------|---------------|--------------|--------------|--------------|-----------------|--------------|--------------|--------------|--------------|--------------|--------------|
| | PAL & NTSC & SECAM | | | PAL & NTSC | | PAL & SECAM | | PAL | | NTSC | | SECAM | | |
| | 54100M01/nnn | 54100M02/nnn | 54100M03/nnn | 54100PN1/nnn | 54100PN2/nnn | 54100PN3/nnn | 54100PS1/nnn | 54100PS2/nnn | 54100P01/nnn | 54100P02/nnn | 54100N01/nnn | 54100N02/nnn | 54100S01/nnn | 54100S02/nnn |
| Teletext & PDC & VPS | • | | | • | | | • | | • | | | | • | |
| Closed Caption | • | | | | • | | | | | | • | | | |
| RGB & Y/C & YCrCb & IEEE & RS-232 | • | • | | • | • | • | • | • | • | • | • | • | • | • |

Operating manual languages and line cord options
(replace 'nnn' in above typenumbers by the following)

| linecord: | European | US-style | UK-style | Swiss | Australian |
|-----------------------|----------|----------|----------|-------|------------|
| user manual language: | | | | | |
| English | /001 | /003 | /004 | | /008 |
| French | /011 | /013 | | | |
| German | /021 | | | /025 | |

Example: "Fluke 54100PN1/025" is the ordering code for a 54100 Video Signal Generator that supports the PAL and NTSC standards, provides Teletext, PDC and VPS data services, is equipped with RGB, Y/C and YCrCb optional outputs and an IEEE and an RS-232 remote control bus, that is delivered with a Swiss line cord and a user manual in the German language.

Included with the instrument

| Fluke 54200 | Fluke 54100 |
|------------------------------------|------------------------------------|
| User Manual 54200 | User Manual 54100 |
| Line cord | Line cord |
| Cable SCART – SCART | Cable SCART – SCART |
| Cable SCART – 3 * Cinch male | Cable SCART – 3 * Cinch male |
| RF cable BNC – IEC-169-2 | Y/C Cable (only with Y/C output) |
| Adaptor IEC-169-2 – F-male | Statement of Calibration Practices |
| Y/C Cable (only with Y/C output) | |
| Statement of Calibration Practices | |

Rackmount

For mounting the generator in a 19" rack, an optional rackmount kit Fluke 54091 is available. Front height is 3 HE (133.5 mm).

Calibration Certificate

As a standard, a 'Statement of Calibration Practices' is delivered with every instrument. On request, a Certificate of Calibration, stating calibration data, will be included at a nominal fee.

Fluke Corporation
P.O. Box 9090, Everett, WA USA 98206

Fluke Europe B.V.
P.O. Box 1186,
5602 BD Eindhoven,
The Netherlands

For more information call:

In the U.S.A. (800) 443-5853 or Fax (425) 446 5116

In Europe and the Middle East +31 40 2 678 200 or

Fax +31 40 2 678 222

In Canada (905) 890-6866

From other countries +1 425 446-5500 or

Fax +1 425 446-5116

On the web: <http://www.fluke.com>

(c) Copyright 1996, 2001 Fluke Corporation.
All rights reserved.

Data subject to change without prior notice.

Printed in the Netherlands.

A0569UEN Rev C 03/01

File: ordering7.doc

General Specifications

ENVIRONMENTAL CONDITIONS

Environment: Laboratory equipment Class 5
(MIL-T-28800D)
 Warming-up time: 30 min
 Recalibration interval: 12 months
 Temperature: +22 to +24 °C for reference temperature
 0 to +50 °C for operating
 -20 to +71 °C for non-operating
 Reliability: MTBF = 20,000 hours
 Humidity, altitude,
 vibration and shock: MIL-T-28800D (Class 5)
 Safety: EN 61010-1 +/A2, Class I
 IEC 1010-1 +A1 +A2, Class I
 CAN/CSA-C22.2 No 1010.1, Class I
 EMC: EN 55011, Group 1, Class B
 VDE 0875, Part 11, Group 1, Class B
 CISPR 11, Group 1, Class B
 FCC Part 15J, Class A

POWER REQUIREMENTS

Line voltage operating: 90 to 264V
 Line frequency: 47.5 to 63 Hz
 Power consumption: 60W

DIMENSIONS and WEIGHT

Width: 323 mm (12.72 in)
 Height: 147 mm (5.79 in)
 132.5 mm (5.22 in) without feet (≈3HE)
 Depth: 417 mm (16.42 in)
 Weight: Net 9.8 kg (21.6 lb)
 Shipping 11.4 kg (25.1 lb)

Values stated without tolerances are typical values



Fluke Corporation
 PO Box 9090, Everett, WA 98206

Fluke Europe B.V.
 PO Box 1186, 5602 BD Eindhoven,
 The Netherlands

For more information call:
 In the U.S.A.: (800) 443-5853 or
 Fax: (206) 356-5116
 In Europe/M-East: +(3140) 2 678
 200 or Fax: +(3140) 2 678 222
 In Canada: (905) 890-7600 or
 Fax: (905) 890-6866
 From other countries: +1(206)
 356-5500 or Fax: +1(206) 356-
 5116
 Web access: <http://www.fluke.com>

©Copyright 1996 Fluke Corporation,
 All rights reserved. Printed in the Netherlands 11/96.
 Date subject to alteration without notice,
 XXXXXXXX Rev xxxxx