

4-terminal Ω function **3239**
Advanced model **3238**
Economically priced **3237**



Outstanding performance for production lines with a sampling rate of 3.3 ms

High-speed 5½digit DMM

The DIGITAL HiTESTERs 3237, 3238, and 3239 can perform 3.3 ms high-speed sampling, and come equipped with a comparator, external input and output, and an RS-232C interface. These three high-performance DMMs can be used not only in laboratories, but in production lines that require the minimal tact time.

The 3237 is the basic model, and is equipped with the basic necessary functions. The 3238 is a high-precision, broadband model that also features current measurement terminals and a frequency measurement function. The 3239 includes the functions of the 3238 plus the 4-terminal resistance measurement function. All three units are designed with emphasis on measurement speed and safety.

3.3 ms/sample

High-speed Performance and Reliability

Features

- Samples at rates of up to 300 samples/sec. (3.3 ms/sample)
- Comparator function provides high-speed pass/fail evaluation
- Equipped with external input and output for sequence control
- Useful Save/Load function helps work go faster

The 3237, 3238 and 3239 are equipped with a variety of functions that help minimize tact time in production lines.

For details, see page 2.

- Low power resistance measurement function prevents sample deterioration

The 3237, 3238 and 3239 use a low power Ω function to minimize sample degradation when measuring resistance.












With this function, open terminal voltage never goes over 0.45 V DC, and measurement current never surpasses 100 μ A DC.

For specifications, see pages 5 and 6.

- Select from 3 types of units

The basic and economical **3237**

✓ DC V basic accuracy: $\pm 0.025\%$ rdg. ± 2 dgt.

| | | 3237 | 3238 | 3239 |
|---|--|------|------|------|
|  | DC voltage [5 ranges, 199.999 mV to 1000.00 V] | ✓ | ✓ | ✓ |
|  | AC voltage [4 ranges, 1999.99 mV to 700.00 V] | ✓ | ✓ | ✓ |
|  | Resistance 2-terminal [7 ranges, 199.999 Ω to 100.000 M Ω] | ✓ | ✓ | ✓ |
|  | Resistance LP 2-terminal [4 ranges, 1999.99 Ω to 1999.99 M Ω] | ✓ | ✓ | ✓ |
|  | Continuity check [A buzzer sounds when resistance is less than 50.00 Ω] | ✓ | ✓ | ✓ |
|  | Diode check [Anode-cathode voltage in the 1999.99 mV range] | ✓ | ✓ | ✓ |
|  | Current measurement by clamp sensor | ✓ | ✓ | ✓ |
|  | AC/DC current [2 ranges, 199.999 mA and 1999.99 mA] | | ✓ | ✓ |
|  | Frequency [5 ranges, 99.9999 Hz to 300.000 kHz] | | ✓ | ✓ |
|  | Resistance 4-terminal [5 ranges, 199.999 Ω to 1999.99 k Ω] | | | ✓ |
|  | Resistance LP 4-terminal [4 ranges, 1999.99 Ω to 1999.99 M Ω] | | | ✓ |

For clamp specifications, see page 4

For DIGITAL HiTESTER specifications, see pages 5 and 6

Sampling speed Values in the () show samples/second.

| Frequency | FAST* | MEDIUM | SLOW |
|-----------|----------------------|--------------------|-----------------------|
| 50 Hz | 3.3 ± 1 ms (300) | 130 ± 5 ms (8) | 1,040 ± 50 ms (1) |
| 60 Hz | 3.3 ± 1 ms (300) | 108 ± 5 ms (9) | 1,080 ± 50 ms (1) |

* Approximately 55 ms required for self-calibration at 30-minute intervals.

Does not apply at resistances higher than 2M Ω , or LP Ω higher than 200k Ω (see page 5).

For the 3238 and 3239's frequency function gate time, see page 5.

- True RMS value measurement

Both the 3237 and 3238 use true RMS measurement for determination of distorted waveforms. In fact, HIOKI guarantees accuracy of the 3238 and 3239 for AC voltage of 10 Hz to 300 kHz, and AC current of 10 Hz to 30 kHz.

For specifications, see pages 5 and 6.

- Interface supports full remote operation

Measurement can be automated by using a controller to operate the 3237 or 3238 through the GP-IB or RS-232C interface.

For details, see page 3.

The high-accuracy & multi-functional **3238**

✓ DC V basic accuracy: $\pm 0.01\%$ rdg. ± 2 dgt.

✓ Includes frequency measurement for AC and DC A

For 4-terminal resistance measurement **3239**

✓ DC V basic accuracy: $\pm 0.01\%$ rdg. ± 2 dgt.

✓ All the functions of the 3238, plus 4-terminal Ω measurement

- Reliable resistance measurement



using the 4-terminal measurement method

Using 4-terminal resistance measurement, which is unaffected by variables such as measurement lead wiring resistance, the 3239 displays outstanding resistance measurement capabilities.




Minimizing tact time with sequence control

High-speed comparator and external input/output

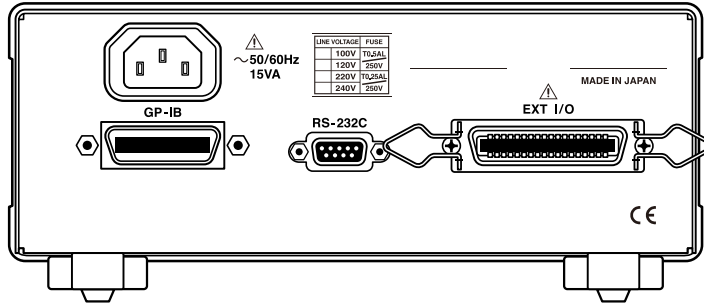

Connector used: 57RE-40360-730B (D29) (DDK Ltd.)
 Conforming connector: ADS-HC360001-010 (Honda Tsuchin Kogyo Co., Ltd.),
 57-30360 (DDK Ltd.) and other suitable connectors

- Loading of saved settings from panel.....LOAD 0 to 4
- Measurement start trigger input.....TRIG
- Measurement end signal output.....EOC
- Comparator output.....Hi, IN, Lo
- Internal power supply +5 V (max. 50 mA).....INT. DC V
- Internal GND.....INT. GND

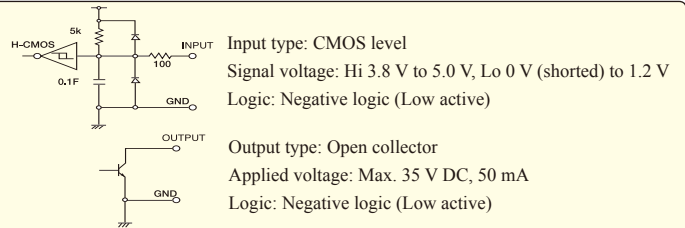


■ Comparator with external output **COMP**

You can set the upper and lower limits, and display one of 3 results: Hi, IN or Lo. In addition to LED and buzzer results, open collector output results are provided through the external input/output terminals.


X: measurement value, H: Upper limit, L: Lower limit
 $X > H$Hi
 $H \geq X \geq L$IN
 $L > X$Lo



INT. TRIG With free running measurement

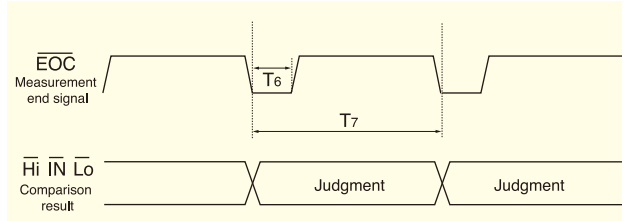

M.TRIG With external control

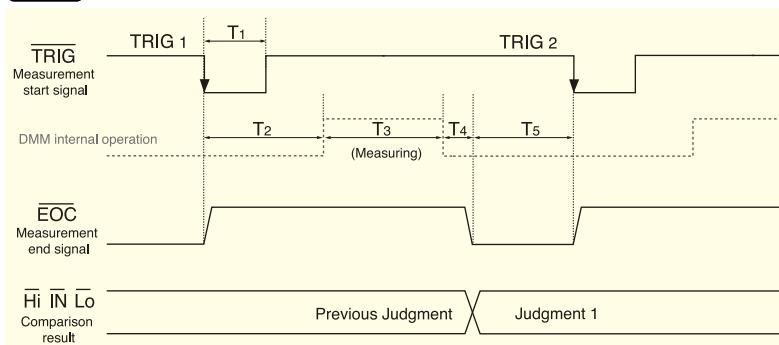

| | | Time | | |
|----|--|-------------|---|--------|
| | | MIN. | TYP. | MAX. |
| T1 | Measurement trigger pulse width | 500 μ s | ... | ... |
| T2 | Trigger delay time | See below | | |
| T3 | Sampling time using external control | FAST | See the table at the top right of page 1. | |
| | | MEDIUM | | |
| | | SLOW | | |
| T4 | Internal operation time | ... | 2.0 ms | ... |
| T5 | From the end of measurement until the next trigger | 500 μ s | ... | ... |
| T6 | EOC Lo level time for free running measurement | FAST | ... | 1.7 ms |
| | | MEDIUM | ... | 50 ms |
| | | SLOW | ... | 500 ms |
| T7 | Sampling time for free running measurement | FAST | See the table at the top right of page 1. | |
| | | MEDIUM | | |
| | | SLOW | | |

■ Save/Load function for rapid response to various work situations

You can save and recall a maximum of 30 DMM setting conditions for various range and comparator values.



■ A trigger delay designed for measurement safety

The 3237, 3238 and 3239 are equipped with a trigger delay function that can be set to manual or automatic for the time period between trigger input and the display of the comparator result (see T2 in the figure above).

Manual settings: Designate periods in terms of millisecond intervals between 0.000 s and 9.999 s
 Automatic settings:

| | FAST | MEDIUM | SLOW |
|--|--------|--------|-------|
| DC V | 3 ms | 3 ms | 3 ms |
| AC V | 500 ms | 800 ms | 1.5 s |
| Ω (200 Ω to 200 k Ω) | 3 ms | 3 ms | 3 ms |



Automation of Line Inspection

Available interfaces

GP-IB



■ GP-IB (option -01 specifications)

Purpose: Remote control and measurement value output

Standards conformance : IEEE -488.1 1987

Reference standard : IEEE -488.2 1987

| Transmission speed (reference data) | FAST | MEDIUM | SLOW |
|-------------------------------------|--------|--------|----------|
| Transmission speed | 7.0 ms | 108 ms | 1,080 ms |

Power line frequency: 60Hz

TRIG: EXT.Trig

Command: [READ ?]

Controller: PC-9801 RA (NEC)

OS: MS-DOS Ver. 3.30, N88-BASIC Ver. 6.0


Interface function:

SH1, AH1, T6, L4, SR1, RL1, PP0, DC1, DT1, CO

User code : ASCII code

User connector : 24-pin IEEE488 interface bus connector

RS-232C



■ RS-232C (standard)

Purpose: Remote control and measurement value output

Transmission system : Asynchronous method Full duplex

Transmission speed : 9600 bps (fixed)

Data bit length : 8 bits

Stop bits : 1

Parity bits : None

Delimiter : CR+LF

Handshaking : Hardware

XON/XOFF : Not used

Connector : 9-pin D-sub connector

All functions except switching the power on and off can be completely remote controlled and measurement data collected via either the GP-IB or RS-232C interface

Please inquire regarding compatibility with the command sets of other manufacturers.

■ Output data to a printer (option)

When an RS-232C compatible PRINTER 9442 is connected, you can print measurements by pressing the **M.TRIG** key if in manual trigger mode, or the **ENT** key if in internal trigger (free run) mode.

| Item No. | Measurement function | Value | Judgment |
|----------|----------------------|-------------|----------|
| 1 | VDC | 141.457mV | Hi |
| 2 | VDC | 10.216 V | IN |
| 3 | RES | 10.8205kohm | IN |
| 4 | RES | 0F kohm | LO |
| 5 | LPR | 920.92 ohm | IN |
| 6 | CONT | 0.84 ohm | Hi |
| 7 | DIOD | 572.33mV | IN |
| 8 | FREQ | 32.7683kHz | IN |
| 9 | CDC | 71.069mA | LO |
| 10 | CAC | 1135.01 A | Hi |

PRINTER 9442



CONNECTOR CABLE 9444

Cord length approx 1.5m



AC ADAPTER 9443



9443-02 (For the EU)

9443-01 (For Japan)

Please specify appropriate model number suffix when ordering.

■ The printer can also be controlled using a foot switch.


As an alternative to pressing the **M.TRIG** key or the **ENT** key, you can also connect a foot switch to the external I/O TRIG terminal. You can then initiate printing by stepping on the foot switch (closing the circuit).

Printing method : Thermal serial dot matrix
 Paper width : 112 mm
 Printing speed : 52.5cps
 Power supply : AC ADAPTER 9443 or supplied nickel-hydrate battery (capable of printing about 3000 lines on full charge from 9443)
 Dimensions and mass : Approx. 160W × 66.5H × 170D mm; approx. 580 g

When you purchase a PRINTER 9442, you must also purchase a CONNECTION CABLE 9444 and a AC ADAPTER 9443 to connect it to the DMM.

Efficient Evaluation Testing

PC measurement using the high accuracy and broad coverage of the 3238 and 3239

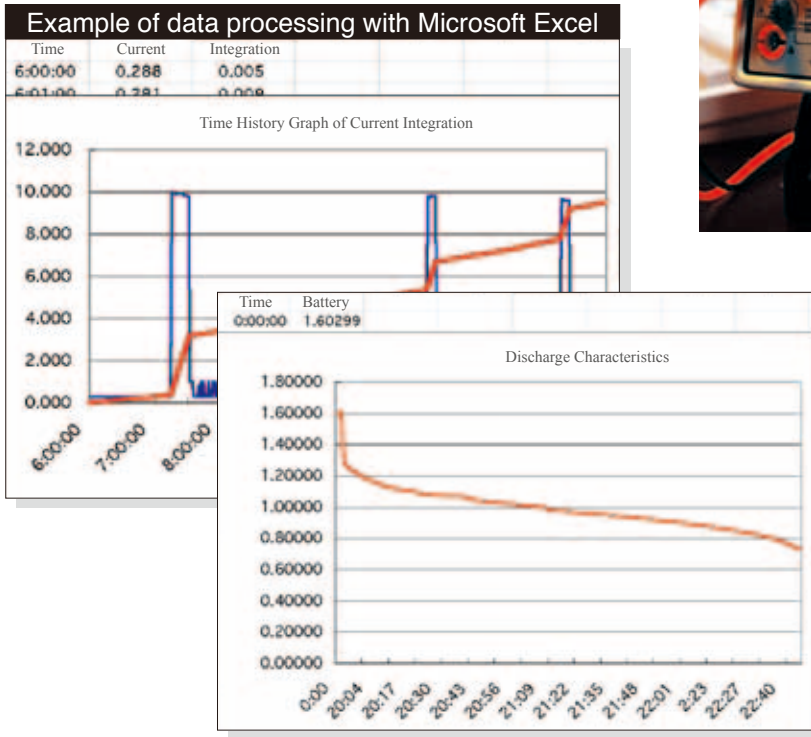

■ **Highly accurate measurement with minimal drift**

The unit uses self-regulation to suppress drift. Also, the DMM is ideal for collecting data over extended periods of time.

■ **Using Excel for efficient data processing**





The DMM supports fast data processing by allowing you to transfer data directly to a worksheet through either the GP-IB or RS-232C interface.


Consult your nearest HIOKI dealer for details on software

■ Supports large AC current measurement by clamp sensor

■ **Easy setup ~CLAMP**

Both the 3237, 3238 and 3239 can measure live line currents using an optional clamp sensor. Enter the name of the clamp sensor being used and display current values simply by selecting a range.

| CLAMP ON SENSOR | 9010-50 | 9018-50 | 9132-50 |
|---|--|--|--|
|  CONVERSION ADAPTER 9704 Receive: BNC Output: Banana |  CE cord length 3m (requires the 9704) |  CE cord length 3m (requires the 9704) |  CE cord length 3m (requires the 9704) |
| Rated current | 10/20/50/100/200/500 A AC | | 20/50/100/200/500/1000 A AC |
| Accuracy (23°C ± 3°C, 45 to 66Hz) | ± 2 % rdg. ± 1 % f.s. | ± 1.5 % rdg. ± 0.1 % f.s. | ± 3 % rdg. ± 0.2 % f.s. |
| Frequency characteristics (deviation from the basic accuracy) | at 40 Hz to 1 kHz ± 6 % (10, 20A range) ± 3 % (50 to 500A range) | at 40 Hz to 3 kHz ± 1 % max | at 40 Hz to 1 kHz ± 1 % max |
| Max. permissible input (cont.) (45 to 66Hz) | 150 Arms (10 to 50A ranges) 400 Arms (100, 200A ranges) 650 Arms (500A range) | | 1000 Arms |
| Maximum rated voltage to earth | 600 Vrms (850 Vpeak) insulated conductor | | |
| Measurable conductor diameter | φ46 mm | | φ55 mm or 80X20 mm bus bar |
| Dimensions and mass | Approx. 78W×188H×35D mm, 420g | | Approx. 100W×224H×35D mm, 600g |

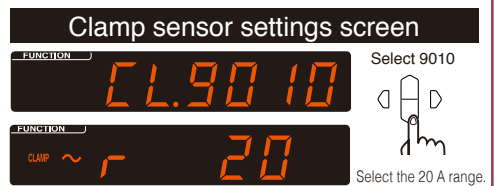

From the menu's clamp sensor selection screen, select the name of the sensor with the cursor key and press the **[ENT]** key. Then, select the same range as you set for the sensor with the cursor key.

* The accuracy of the clamp sensors shown on the left (when used with the DMM) is calculated by taking: the difference in the AC V accuracy for the DMM (dgt.) × 10 (dgt.). For the AC V accuracy of the DMM, see page 6.

3237, 3238, 3239 common specifications (Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)

● DC voltage (DC V)

| Range | Resolution | Full scale | Input impedance | Overload protection |
|---------|------------|------------|--------------------|--|
| 200 mV | 1 μV | 199.999mV | Greater than 100MΩ | 1000 V DC 750 V AC However, less than 10 ⁷ V Hz |
| 2000 mV | 10 μV | 1999.99mV | Greater than 100MΩ | |
| 20 V | 100 μV | 19.9999 V | Approx. 11 MΩ | |
| 200 V | 1 mV | 199.999 V | Approx. 10 MΩ | |
| 1000 V | 10 mV | 1000.00 V | Approx. 10 MΩ | |

● AC voltage (AC V)

| Range | Resolution | Full scale | Input impedance | Overload protection |
|---------|------------|------------|-----------------|---|
| 2000 mV | 10 μV | 1999.99mV | Approx. 1 MΩ | 600 V DC 750 V rms, 1000Vpeak However, less than 10 ⁷ V Hz |
| 20 V | 100 μV | 19.9999 V | Approx. 1 MΩ | |
| 200 V | 1 mV | 199.999 V | Approx. 1 MΩ | |
| 700 V | 10 mV | 750.00 V | Approx. 1 MΩ | |

● Resistance (Ω) 2-terminal measurement

| Range | Resolution | Full scale | Current | Open terminal voltage | Overload protection |
|---------|------------|------------|---------------|-----------------------|---------------------|
| 200 Ω | 1 mΩ | 199.999 Ω | Approx. 1 mA | 6V DC max. | 500Vpeak |
| 2000 Ω | 10 mΩ | 1999.99 Ω | Approx. 1 mA | 6V DC max. | |
| 20 kΩ | 100 mΩ | 19.9999kΩ | Approx. 100μA | 6V DC max. | |
| 200 kΩ | 1 Ω | 199.999kΩ | Approx. 10μA | 6V DC max. | |
| 2000 kΩ | 10 Ω | 1999.99kΩ | Approx. 1 μA | 6V DC max. | |
| 20 MΩ | 100 Ω | 19.9999MΩ | Approx. 100nA | 6V DC max. | |
| 100 MΩ | 1 kΩ | 100.000MΩ | Approx. 20nA | 6V DC max. | |

● Resistance (Ω) at Low Power function 2-terminal measurement

| Range | Resolution | Full scale | Current | Open terminal voltage | Overload protection |
|---------|------------|------------|---------------|-----------------------|---------------------|
| 2000 Ω | 10 mΩ | 1999.99 Ω | Approx. 100μA | 0.45V DC max. | 500Vpeak |
| 20 kΩ | 100 mΩ | 19.9999kΩ | Approx. 10μA | 0.45V DC max. | |
| 200 kΩ | 1 Ω | 199.999kΩ | Approx. 1 μA | 0.45V DC max. | |
| 2000 kΩ | 10 Ω | 1999.99kΩ | Approx. 100nA | 0.45V DC max. | |

For fast sampling in the 20 MΩ range or higher.

For sampling at in the 2 MΩ range or the LPΩ 200 kΩ range or higher

| Frequency | FAST* | MEDIUM | SLOW | Frequency | FAST* |
|-----------|------------|-----------|--------------|-----------|------------|
| 50 Hz | 20 ±1 ms | 170 ±5 ms | 1,360 ±50 ms | 50 Hz | 20 ±1 ms |
| 60 Hz | 16.7 ±1 ms | 142 ±5 ms | 1,420 ±50 ms | 60 Hz | 16.7 ±1 ms |

* Approximately 55 ms required for self-calibration at 30-minute intervals.

● Continuity check

| Range | Resolution | Full scale | Current | Open terminal voltage | Overload protection |
|--------|------------|------------|---------------|-----------------------|---------------------|
| 2000 Ω | 10 mΩ | 1999.99 Ω | Approx. 100μA | 0.45V DC max. | 500 Vpeak |

A built-in buzzer sounds when the resistance value is less than 50.00 Ω.

● Diode check

| Range | Resolution | Full scale | Current | Open terminal voltage | Overload protection |
|---------|------------|------------|--------------|-----------------------|---------------------|
| 2000 mV | 10 μV | 1999.99mV | Approx. 1 mA | 6V DC max. | 500 Vpeak |

3238, 3239 specifications (Accuracy at 23°C±5°C (73°F±9°F), 80% rh or less)

● AC/DC current (A)

| Range | Resolution | Full scale | Internal resistance | Overload protection |
|---------|------------|------------|---------------------|---------------------|
| 200 mA | 1 μA | 199.999mA | Approx. 1 Ω | 250V, 2A fuse |
| 2000 mA | 10 μA | 1999.99mA | Approx. 100 mΩ | |

● DC current (DC A) Accuracy %, ppm=reading error, d=digit error

| Range | Sampling | | | Thermal coefficient |
|---------|-----------|------------|-------------|---------------------|
| | SLOW | MEDIUM | FAST | |
| 200 mA | ±0.1 %±6d | ±0.1 %±10d | ±0.1 %±300d | ±100ppm±0.6d |
| 2000 mA | ±0.15%±6d | ±0.15%±10d | ±0.15%±300d | ±150ppm±0.6d |

● AC current (AC A) 200mA range Accuracy %, ppm=reading error, d=digit error

| Range | Frequency | Sampling | | | Thermal coefficient |
|------------|------------------|------------|------------|------------|---------------------|
| | | SLOW | MEDIUM | FAST | |
| All Ranges | 10 Hz to 20 Hz | ±1.0%±200d | undefined | undefined | ±0.1 %±20d |
| | 20 Hz to 45 Hz | ±0.4%±200d | undefined | undefined | ±400ppm±20d |
| | 45 Hz to 300 Hz | ±0.3%±100d | ±0.5%±200d | undefined | ±300ppm±10d |
| | 300 Hz to 1 kHz | ±0.3%±100d | ±0.4%±200d | ±0.4%±300d | ±300ppm±10d |
| | 1 kHz to 3 kHz | ±0.3%±100d | ±0.4%±200d | ±0.4%±300d | ±300ppm±10d |
| | 3 kHz to 10 kHz | ±0.5%±300d | ±0.5%±300d | ±0.5%±400d | ±500ppm±30d |
| | 10 kHz to 30 kHz | ±1.0%±300d | ±1.0%±300d | ±1.0%±400d | ±0.1 %±30d |

● AC current (AC A) 2000mA range Accuracy

| Range | Frequency | Sampling | | | Thermal coefficient |
|------------|------------------|------------|------------|------------|---------------------|
| | | SLOW | MEDIUM | FAST | |
| All Ranges | 10 Hz to 20 Hz | ±1.2%±200d | undefined | undefined | ±0.12%±20d |
| | 20 Hz to 45 Hz | ±0.6%±200d | undefined | undefined | ±600ppm±20d |
| | 45 Hz to 300 Hz | ±0.4%±100d | ±0.6%±200d | undefined | ±400ppm±10d |
| | 300 Hz to 1 kHz | ±0.4%±100d | ±0.6%±200d | ±0.6%±300d | ±400ppm±10d |
| | 1 kHz to 3 kHz | ±0.6%±200d | ±0.6%±200d | ±0.6%±300d | ±600ppm±20d |
| | 3 kHz to 10 kHz | ±1.2%±300d | ±1.2%±300d | ±1.2%±400d | ±0.12%±30d |
| | 10 kHz to 30 kHz | undefined | undefined | undefined | undefined |

Specified input is 16 mA or higher

Specified input is 160 mA or higher

Additional error due to crest factor: 1<CF≤2: ±200d, 2<CF≤3: ±500d, 3<CF: Outside the assured accuracy range

● Frequency (Hz) Source is AC V only and input level is higher than 8% of full scale

| Range | Resolution | Full scale | Internal resistance | Min. measurement | Overload protection |
|---------|------------|------------|---------------------|------------------|---|
| 100 Hz | 0.1 mHz | 99.9999 Hz | Approx. 1MΩ | 10 Hz | 600 V DC |
| 1 kHz | 1 mHz | 999.999 Hz | Approx. 1MΩ | 10 Hz | 750 V rms, |
| 10 kHz | 10 mHz | 9.99999kHz | Approx. 1MΩ | 10 Hz | 1000Vpeak |
| 100 kHz | 100mHz | 99.9999kHz | Approx. 1MΩ | 10 Hz | However, less than 10 ⁷ V Hz |
| 300 kHz | 1 Hz | 999.999kHz | Approx. 1MΩ | 10 Hz | |

● Frequency (Hz) Accuracy %, ppm=reading error, d=digit error

| Range | For all gate times | | Thermal coefficient |
|------------|---|--|---------------------|
| | Square-wave input between 10 Hz to 300 kHz, 10 V p-p. | | |
| All Ranges | ±0.015% ±2d | | ±5 ppm |

Frequency gate time

| FAST | MEDIUM | SLOW |
|----------|------------|--------------|
| 15 ±6 ms | 110 ±10 ms | 1,010 ±20 ms |

Measurement time: from gate time to the input signal period × 2

3239 specifications (Accuracy at 23°C±5°C (73°F±9°F), 80% rh or less)

● Resistance (Ω) 4-terminal measurement

| Range | Resolution | Full scale | Current | Open terminal voltage | Overload protection |
|---------|------------|------------|---------------|-----------------------|---|
| 200 Ω | 1 mΩ | 199.999 Ω | Approx. 1 mA | 6V DC max. | V, Ω terminal 500Vpeak SENSE terminal 400Vpeak |
| 2000 Ω | 10 mΩ | 1999.99 Ω | Approx. 1 mA | 6V DC max. | |
| 20 kΩ | 100 mΩ | 19.9999kΩ | Approx. 100μA | 6V DC max. | |
| 200 kΩ | 1 Ω | 199.999kΩ | Approx. 10μA | 6V DC max. | |
| 2000 kΩ | 10 Ω | 1999.99kΩ | Approx. 1 μA | 6V DC max. | |

● Resistance (Ω) at Low Power function 4-terminal measurement

| Range | Resolution | Full scale | Current | Open terminal voltage | Overload protection |
|---------|------------|------------|---------------|-----------------------|---|
| 2000 Ω | 10 mΩ | 1999.99 Ω | Approx. 100μA | 0.45V DC max. | V, Ω terminal 500Vpeak SENSE terminal 400Vpeak |
| 20 kΩ | 100 mΩ | 19.9999kΩ | Approx. 10μA | 0.45V DC max. | |
| 200 kΩ | 1 Ω | 199.999kΩ | Approx. 1 μA | 0.45V DC max. | |
| 2000 kΩ | 10 Ω | 1999.99kΩ | Approx. 100nA | 0.45V DC max. | |

● 3237 DC voltage (DC V) Accuracy %, ppm=reading error, d=digit error ● 3238, 3239 DC voltage (DC V) Accuracy %, ppm=reading error, d=digit error

| Range | Sampling | | | Thermal coefficient | Sampling | | | Thermal coefficient |
|--------|------------|-------------|--------------|---------------------|------------|-------------|--------------|---------------------|
| | SLOW | MEDIUM | FAST | | SLOW | MEDIUM | FAST | |
| 200 mV | ±0.026%±6d | ±0.026%±10d | ±0.035%±300d | ±20ppm±0.6d | ±0.012%±6d | ±0.012%±10d | ±0.02%±300d | ±12ppm±0.6d |
| 2000mV | ±0.025%±2d | ±0.025%±8d | ±0.03%±100d | ±15ppm±0.2d | ±0.01 %±2d | ±0.01 %±8d | ±0.015%±100d | ±10ppm±0.2d |
| 20 V | ±0.028%±5d | ±0.028%±10d | ±0.035%±100d | ±20ppm±0.5d | ±0.016%±5d | ±0.016%±10d | ±0.02%±100d | ±16ppm±0.5d |
| 200 V | ±0.028%±2d | ±0.028%±8d | ±0.035%±100d | ±20ppm±0.2d | ±0.016%±2d | ±0.016%±8d | ±0.02%±100d | ±16ppm±0.2d |
| 1000 V | ±0.028%±2d | ±0.028%±8d | ±0.035%±100d | ±20ppm±0.2d | ±0.016%±2d | ±0.016%±8d | ±0.02%±100d | ±16ppm±0.2d |

CMRR (50/60Hz RI=1kΩ): SLOW 130dB, MEDIUM 90dB, FAST 20dB NMRR (50/60Hz): SLOW 70dB, MEDIUM 50dB, FAST 0dB

● 3237 AC voltage (AC V) Accuracy %, ppm=reading error, d=digit error ● 3238, 3239 AC V Accuracy %, ppm=reading error, d=digit error

| Range | Frequency | Sampling | | | Thermal coefficient | Sampling | | | Thermal coefficient |
|------------------|------------------|------------|------------|------------|---------------------|-------------|-------------|-------------|---------------------|
| | | SLOW | MEDIUM | FAST | | SLOW | MEDIUM | FAST | |
| All Ranges | 10 Hz to 20 Hz | ±1.5%±200d | undefined | undefined | ±0.15%±20d | ±0.8%±200d | undefined | undefined | ±800ppm±20d |
| | 20 Hz to 45 Hz | ±0.5%±200d | undefined | undefined | ±500ppm±20d | ±0.2%±200d | undefined | undefined | ±200ppm±20d |
| | 45 Hz to 300 Hz | ±0.2%±100d | ±0.5%±300d | undefined | ±200ppm±10d | ±0.1%±100d | ±0.3%±200d | undefined | ±100ppm±10d |
| | 300 Hz to 3 kHz | ±0.2%±100d | ±0.2%±200d | ±0.2%±300d | ±200ppm±10d | ±0.1%±100d | ±0.1%±200d | ±0.1%±300d | ±100ppm±10d |
| | 3 kHz to 10 kHz | ±0.3%±200d | ±0.3%±200d | ±0.3%±300d | ±300ppm±20d | ±0.1%±100d | ±0.1%±200d | ±0.1%±300d | ±100ppm±10d |
| | 10 kHz to 30 kHz | ±1.5%±600d | ±1.5%±600d | ±1.5%±700d | ±0.15%±60d | ±0.3%±400d | ±0.3%±400d | ±0.3%±500d | ±300ppm±40d |
| | 30 kHz to 50 kHz | undefined | undefined | undefined | undefined | ±0.3%±400d | ±0.3%±400d | ±0.3%±500d | ±300ppm±40d |
| | 50 kHz to 100kHz | undefined | undefined | undefined | undefined | ±1.5%±1000d | ±1.5%±1000d | ±1.5%±1100d | ±0.15%±100d |
| 100kHz to 300kHz | undefined | undefined | undefined | undefined | ±5.0%±5000d | ±5.0%±5000d | ±5.0%±5000d | ±0.5%±500d | |

The accuracy above is standard for inputs higher than 8% of full scale (higher than 160 V for a range of 750 V).

Additional error due to crest factor: 1<CF<2: ±200d, 2<CF<3: ±0.2%rdg±500d(3237), ±500d(3238, 3239), 3<CF: Outside the assured accuracy range

● 3237 Resistance (Ω) Accuracy %, ppm=reading error, d=digit error ● 3238, 3239 Resistance (Ω) Accuracy %, ppm=reading error, d=digit error

| Measurement | Range | Sampling | | | Thermal coefficient | Sampling | | | Thermal coefficient |
|------------------------|---------|------------|-------------|-------------|---------------------|------------|-------------|-------------|---------------------|
| | | SLOW | MEDIUM | FAST | | SLOW | MEDIUM | FAST | |
| 2-terminal measurement | 200 Ω | ±0.05 %±8d | ±0.05 %±18d | ±0.05%±300d | ±50ppm±0.8d | ±0.03 %±8d | ±0.03 %±18d | ±0.03%±300d | ±30ppm±0.8d |
| | 2000 Ω | ±0.05 %±2d | ±0.05 %±12d | ±0.05%±100d | ±50ppm±0.2d | ±0.02 %±2d | ±0.02 %±12d | ±0.02%±100d | ±20ppm±0.2d |
| | 20 kΩ | ±0.05 %±2d | ±0.05 %±12d | ±0.05%±100d | ±50ppm±0.2d | ±0.02 %±2d | ±0.02 %±12d | ±0.02%±100d | ±20ppm±0.2d |
| | 200 kΩ | ±0.05 %±2d | ±0.05 %±12d | ±0.05%±200d | ±50ppm±0.2d | ±0.02 %±2d | ±0.02 %±12d | ±0.02%±200d | ±20ppm±0.2d |
| | 2000 kΩ | ±0.05 %±2d | ±0.05 %±12d | ±0.05%±200d | ±50ppm±0.2d | ±0.03 %±2d | ±0.03 %±12d | ±0.03%±200d | ±30ppm±0.2d |
| | 20 MΩ | ±0.3 %±4d | ±0.3 %±20d | ±0.3 %±200d | ±300ppm±0.4d | ±0.2 %±4d | ±0.2 %±20d | ±0.2 %±200d | ±200ppm±0.4d |
| | 100 MΩ | ±3.0 %±10d | ±3.0 %±50d | ±3.0 %±500d | ±0.3%±1d | ±3.0 %±10d | ±3.0 %±50d | ±3.0 %±500d | ±0.3%±1d |

After zero adjustment. When measuring high resistance, use a shielded cable such as the 9236 CONNECTION CORD (1.7m).

● 3237 Resistance (Ω) Accuracy at Low Power function ● 3238, 3239 Resistance (Ω) Accuracy at Low Power function

| Measurement | Range | Sampling | | | Thermal coefficient | Sampling | | | Thermal coefficient |
|------------------------|---------|------------|-------------|--------------|---------------------|------------|-------------|-------------|---------------------|
| | | SLOW | MEDIUM | FAST | | SLOW | MEDIUM | FAST | |
| 2-terminal measurement | 2000 Ω | ±0.05 %±6d | ±0.05 %±14d | ±0.05 %±300d | ±50ppm±0.6d | ±0.02 %±6d | ±0.02 %±14d | ±0.02%±300d | ±20ppm±0.6d |
| | 20 kΩ | ±0.05 %±6d | ±0.05 %±14d | ±0.05 %±300d | ±50ppm±0.6d | ±0.02 %±6d | ±0.02 %±14d | ±0.02%±300d | ±20ppm±0.6d |
| | 200 kΩ | ±0.05 %±6d | ±0.05 %±14d | ±0.05 %±300d | ±50ppm±0.6d | ±0.02 %±6d | ±0.02 %±14d | ±0.02%±300d | ±20ppm±0.6d |
| | 2000 kΩ | ±0.3 %±6d | ±0.3 %±20d | ±0.3 %±500d | ±300ppm±0.6d | ±0.2 %±6d | ±0.2 %±20d | ±0.2 %±300d | ±200ppm±0.6d |

After zero adjustment. When measuring high resistance, use a shielded cable such as the 9236 CONNECTION CORD (1.7m).

● 3237 Continuity check Accuracy %, ppm=reading error, d=digit error ● 3238, 3239 Continuity check Accuracy %, ppm=reading error, d=digit error

| Range | Sampling | | Thermal coefficient | Sampling | | Thermal coefficient |
|--------|--------------|--|---------------------|--------------|--|---------------------|
| | FAST only | | | FAST only | | |
| 2000 Ω | ±0.05 %±300d | | ±50ppm±0.6d | ±0.02 %±300d | | ±20ppm±0.6d |

● 3237 Diode check Accuracy %, ppm=reading error, d=digit error ● 3238, 3239 Diode check Accuracy %, ppm=reading error, d=digit error

| Range | Sampling | | | Thermal coefficient | Sampling | | | Thermal coefficient |
|--------|-------------|-------------|--------------|---------------------|------------|------------|--------------|---------------------|
| | SLOW | MEDIUM | FAST | | SLOW | MEDIUM | FAST | |
| 2000 Ω | ±0.025% ±2d | ±0.025% ±8d | ±0.03% ±100d | ±15ppm±0.2d | ±0.01 %±2d | ±0.01 %±8d | ±0.015%±100d | ±10ppm±0.2d |

4-terminal measurement

● Resistance (Ω) Accuracy %, ppm=reading error, d=digit error

| Measurement | Range | Sampling | | | Thermal coefficient | Sampling | | | Thermal coefficient |
|------------------------|---------|------------|-------------|--------------|---------------------|------------|-------------|-------------|---------------------|
| | | SLOW | MEDIUM | FAST | | SLOW | MEDIUM | FAST | |
| 4-terminal measurement | 200 Ω | ±0.03 %±8d | ±0.03 %±18d | ±0.03 %±300d | ±30ppm±0.8d | No range | No range | No range | No range |
| | 2000 Ω | ±0.02 %±2d | ±0.02 %±12d | ±0.02 %±100d | ±20ppm±0.2d | ±0.02 %±6d | ±0.02 %±14d | ±0.02%±300d | ±20ppm±0.6d |
| | 20 kΩ | ±0.02 %±2d | ±0.02 %±12d | ±0.02 %±100d | ±20ppm±0.2d | ±0.02 %±6d | ±0.02 %±14d | ±0.02%±300d | ±20ppm±0.6d |
| | 200 kΩ | ±0.02 %±2d | ±0.02 %±12d | ±0.02 %±200d | ±20ppm±0.2d | ±0.02 %±6d | ±0.02 %±14d | ±0.02%±300d | ±20ppm±0.6d |
| | 2000 kΩ | ±0.03 %±2d | ±0.03 %±12d | ±0.03 %±200d | ±30ppm±0.2d | ±0.2 %±6d | ±0.2 %±20d | ±0.2 %±300d | ±200ppm±0.6d |

The accuracy quoted above is for a contact resistance of 100 Ω or less.

4-terminal measurement

● Resistance (Ω) Accuracy at Low Power function

■ 3237, 3238, 3239 General Specifications

- AC measurement: True RMS value measurement
- Crest factor: 3.0 max.
- Ancillary functions: Comparator, Average (0 to 99 times), Zero Adjust, Trigger (the display changes when the trigger is activated), and the Save/Load functions. (Up to 30 types of setting conditions)
- Interface: External input/output, RS-232C and GP-IB (option -01 specifications)
- Display: LED max. 199999 (999999 for frequency)
- Sampling rate (see page 1): SLOW approx. 1 samples/s
MEDIUM approx. 8 to 9 samples/s
FAST approx. 300 samples/s (Does not apply at resistances higher than 2MΩ, or LPO higher than 200kΩ)
(self-calibration takes place for approximately 55 ms at 30-minute intervals for FAST sampling only.)
- Range selection: Auto and Manual
- Applicable standards: Safety: EN61010-1, EN61010-031
Lo terminal: CAT II (300V)
Hi terminal: CAT II (600V)
EMC: EN61326-1
- Ambient temperature of use: 0 to 40 °C(32°F to 104°F) 80%RH (no condensation)
- Storage temperature range: -10 to 50°C(-14°F to 122°F) 70%RH (no condensation)
- Power supply: Select from AC 100 V/120 V/220 V/240 V, (50/60 Hz) specify when ordering
- Maximum rated power: 15 VA
- Dimensions and mass: Approx. 215 mm (8.46 in) W × 80 mm (3.15 in) H × 265 mm (10.43 in) D, 2.6 kg (91.7 oz)

DIGITAL HiTESTER 3237, 3238, 3239



(Economical Type)

Model : DIGITAL HiTESTER 3237

| Model No. (Order Code) | (Note) |
|------------------------|----------------------------|
| 3237 | (built-in RS-232C) |
| 3237-01 | (built-in RS-232C & GP-IB) |

(Advanced Type)

Model : DIGITAL HiTESTER 3238

| Model No. (Order Code) | (Note) |
|------------------------|----------------------------|
| 3238 | (built-in RS-232C) |
| 3238-01 | (built-in RS-232C & GP-IB) |

(4-terminal Ω function & Advanced Type)

Model : DIGITAL HiTESTER 3239

| Model No. (Order Code) | (Note) |
|------------------------|----------------------------|
| 3239 | (built-in RS-232C) |
| 3239-01 | (built-in RS-232C & GP-IB) |

Accessories (each models) : Test lead L9170-10 ×1, Instruction manual ×1, Power cord ×1, Spare fuse each 1

| | | |
|---|---|---|
| <p>*L9170-10 is a bundled accessory. *Requires the 9704 to connect a Clamp-on probe</p> <p>Input Probes</p> <p>TEST LEAD L9170-10 70 cm (2.30 ft) length</p> <p>CLAMP ON PROBE 9132-50 ... 1000 A AC 9010-50 ... 500 A AC 9018-50 ... 500 A AC</p> <p>CONVERSION ADAPTER 9704 Receiving end: Female BNC; Output end: Male banana-plug *Not compat- ible with older generation Memory HiCorders with banana input terminals</p> | <p>Printer options</p> <p>PRINTER 9442 For printing numerical values 112 mm (4.41 in) paper width</p> <p>AC ADAPTER 9443-02 For the Printer 9442, EU type</p> <p>CONNECTION CABLE 9444 9 pin - 9 pin straight, 1.5 m (4.92 ft) length</p> <p>RECORDING PAPER 1196 For the Printer 9442, 112 mm (4.41 in) × 25 m (82.03 ft), 10 rolls/set</p> | <p>PC communication</p> <p>RS-232C CABLE 9637 For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft) length</p> <p>RS-232C CABLE 9638 For the PC, 9pin - 25pin, cross, 1.8m (5.91 ft) length</p> <p>GP-IB CONNECTOR CABLE 9151-02 2 m (6.56 ft) length</p> |
| <p>4-Terminal measurement probes</p> <p>PIN TYPE LEAD 9461 A:240 mm (9.45 in), B:132 mm (5.20 in), L:804 mm (2.64 ft)</p> <p>Note: The 9455 is a precision instrument. Exercise appropriate care when handling it.</p> <p>PIN TYPE LEAD 9455 A:260 mm (10.24 in), B:136 mm (5.35 in), L:890 mm (2.92 ft)</p> <p>ZERO ADJUSTMENT BOARD 9454 For the L2100, 9465-10, 9465, 9461</p> | <p>FOUR TERMINAL LEAD 9453 A:280 mm (11.02 in), B:118 mm (4.65 in), L:1360 mm (4.46 ft), 60V DC</p> <p>CLIP TYPE LEAD 9452 A:220 mm (8.66 in), B:197 mm (7.76 in), L:1360 mm (4.46 ft)</p> <p>CLIP TYPE LEADS L2107 A:130 mm (5.12 in), B:83 mm (3.27 in), L:1100 mm (3.61 ft), 70 VDC</p> | <p>About probe length</p> <p>A: From junction to probe B: Probe part L: Whole length</p> |

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

HIOKI

HIOKI E. E. CORPORATION

HEADQUARTERS

81 Koizumi, Ueda, Nagano, 386-1192, Japan
TEL +81-268-28-0562 FAX +81-268-28-0568
http://www.hioki.com / E-mail: os-com@hioki.co.jp

HIOKI USA CORPORATION

TEL +1-609-409-9109 FAX +1-609-409-9108
http://www.hiokiusa.com / E-mail: hioki@hiokiusa.com

HIOKI (Shanghai) SALES & TRADING CO., LTD.
TEL +86-21-63910090 FAX +86-21-63910360
http://www.hioki.cn / E-mail: info@hioki.com.cn

DISTRIBUTED BY

HIOKI SINGAPORE PTE. LTD.
TEL +65-6634-7677 FAX +65-6634-7477
E-mail: info-sg@hioki.com.sg

HIOKI KOREA CO., LTD.
TEL +82-2-2183-8847 FAX +82-2-2183-3360
E-mail: info-kr@hioki.co.jp