MODEL A10200

20GHz 30dBm RF Signal Amplifier

Model A10200 is an ultra-small footprint amplifier designed for high frequency, and high power signal amplification. With an ultra-high bandwidth of almost 20GHz and up to +30dBm power into 50 ohms, the A10200 is the ideal complimentary amplifier to any signal source that needs an extended power boost for demanding applications.



Enhancing Performance

The A10200 was designed to extend the power range of the Tabor arbitrary waveform generators and RF signal generator for applications, requiring a higher output power to drive their DUT (Device Under Test). Combined with the A10200 the Lucid series generators offer a solution for demanding applications requiring up to 20GHz signals at up to +30dBm into 50 ohms loads, without compromising signal integrity.

Cost Effective Versatile Solution

While the A10200 was designed with the Tabor units in mind, it can be used as a standalone amplifier for any signal source. The A10200 offers a compatible, compact and cost-effective solution for extending any signal source's power performance.

Target Applications

Target applications for the A10200 are diverse and include various RF applications, such as receiver testing, multi-tone testing, and general electronics and scientific applications. The new A10200 is an ideal solution for virtually any wide bandwidth application that requires high power and high frequency signal amplification.



MODEL A10200


20GHz 30dBm RF Signal Amplifier

Specification

| RF CHARACTERISTICS | | | |
|---------------------|--|------|------|
| RF Connectors: | 2.92mm(K) | | |
| Frequency Range: | 100kHz to 20GHz | | |
| Gain (in dB): | Min. | Тур. | Max. |
| 100kHz to 100MHz: | 11 | 12 | 14 |
| 100MHz to 3GHz: | 12 | 12.5 | 13 |
| 3GHz to 9GHz: | 9 | 10 | 11 |
| 9GHz to 20GHz: | 7 | 8 | 9.5 |
| Input Return Loss: | 14dB typ. (11dB Min.) | | |
| Output Return Loss: | 12dB typ. (8dB Min.) | | |
| P1dB: | 27dBm | | |
| Psat: | 30dBm | | |
| Output IP3: | 38dBm | | |
| Noise Figure: | 9dB | | |
| Reverse Isolation: | 50dB typ. (40dB Min.) | | |
| Second Harmonic: | 23dBc @ Pout +25 dBm | | |
| RF Input Power: | 27dBm Max. | | |
| Protection: | Reverse Polarity, Over Voltage, Under Voltage, Over Current, and Open-Short Load | | |

| GENERAL | | |
|--------------------|---|--|
| Vcc: | 20-27V, 24V Nominal | |
| Icc: | 450mA typ. | |
| Power Dissipation: | 11W typ. | |
| Dimensions: | 40 x 30 x 85 mm | |
| Weight: | | |
| Without Package: | 110 g | |
| Shipping Weight: | 1.25 kg | |
| Temperature: | | |
| Operating: | 0°C to +40°C | |
| Storage: | -40°C to +70°C | |
| Warm up time: | 15 minutes | |
| Humidity: | 85% RH, non-condensing | |
| Safety: | CE Marked, IEC61010-1:2010 | |
| EMC: | IEC 61326-1:2013 | |
| Calibration: | 2 years | |
| Warranty*: | 3 year standard * 1 year standard in India | |

| ORDERING INFORMATION | | |
|----------------------|---------------------------------|--|
| MODEL | DESCRIPTION | |
| A10200 | 20GHz 30dBm RF Signal Amplifier | |

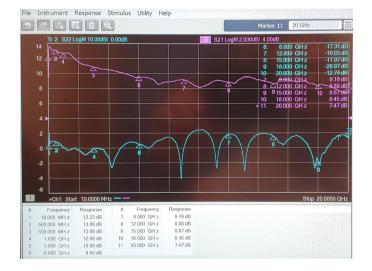

All rights reserved to Tabor Electronics ltd. Tabor makes no representations nor warranties with respect to the accuracy or completeness of the contents and reserves the right to make changes at any time without notice. Ver 1.3

² For more information or to schedule a demo call today or visit our website www.taborelec.com