

Cable ID	Summary	Test Limit	Length	Headroom	Date / Time
COPPER 001	PASS	ISO11801 PL2 Class Fa (1 GHz)	178 ft	7.1 dB (NEXT)	05/10/2013 08:47 AM
COPPER 002	PASS	TIA Cat 5e Channel	6 ft	7.0 dB (NEXT)	04/30/2013 08:35 AM
COPPER 006	PASS	ISO11801 Channel Class Ea	15 ft	4.7 dB (NEXT)	04/30/2013 08:43 AM
COPPER 007	PASS	TIA Cat 6A Channel	15 ft	5.1 dB (NEXT)	04/30/2013 08:44 AM
COPPER 022	PASS	TIA Cat 6A Channel (+TCL)	14 ft	7.3 dB (NEXT)	04/30/2013 09:28 AM
COPPER 023	PASS	ISO11801 Channel Class Ea (+All)	14 ft	7.0 dB (NEXT)	04/30/2013 09:29 AM

Total Length:	242 ft
Number of Reports:	6
Number of Passing Reports:	6
Number of Failing Reports:	0
Number of Warning Reports:	0
Documentation Only:	0



**Cable ID: COPPER 001**

Date / Time: 05/10/2013 08:47:34 AM

Headroom 7.1 dB (NEXT 12-78)

Test Limit: ISO11801 PL2 Class Fa (1 GHz)

Cable Type: Cat 6 U/UTP

NVP: 69.0%

Operator: CHRIS

Software Version: V2.0 Build 4

Limits Version: V2.0

Calibration Date:

Main (Module): 04/03/2013

Remote (Module): 02/22/2013

**Test Summary: PASS**

Model: DSX-5000



Main S/N: 2139624

Remote S/N: 2139622

Main Adapter: DSX-PLA011

Remote Adapter: DSX-PLA011

Length (ft), Limit 295	[Pair 36]	178
Prop. Delay (ns), Limit 496	[Pair 78]	270
Delay Skew (ns), Limit 25	[Pair 78]	7
Resistance (ohms), Limit 20.6	[Pair 12]	6.9
Insertion Loss Margin (dB)	[Pair 78]	21.2
Frequency (MHz)	[Pair 78]	945.0
Limit (dB)	[Pair 78]	55.3

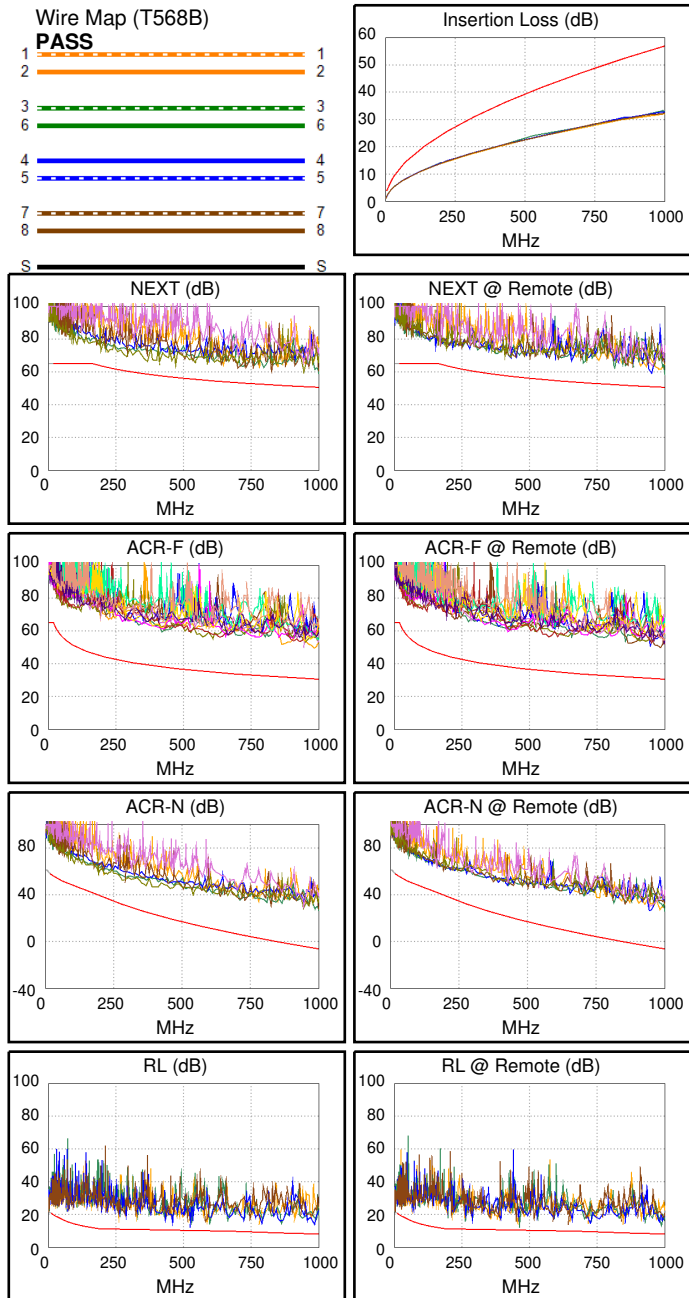

**Worst Case Margin Worst Case Value**

PASS	MAIN	SR	MAIN	SR
Worst Pair	36-78	12-78	12-45	12-78
<b>NEXT (dB)</b>	7.4	7.1	8.1	7.1
Freq. (MHz)	470.0	954.0	1000.	954.0
Limit (dB)	56.7	51.0	50.6	51.0
Worst Pair	45	78	45	78
<b>PS NEXT (dB)</b>	8.7	8.9	8.7	8.9
Freq. (MHz)	1000.	954.0	1000.	954.0
Limit (dB)	47.6	48.0	47.6	48.0

N/A	MAIN	SR	MAIN	SR
Worst Pair	12-36	45-36	12-36	36-12
<b>ACR-F (dB)</b>	18.3	18.6	18.3	19.1
Freq. (MHz)	986.0	47.8	986.0	986.0
Limit (dB)	30.6	56.9	30.6	30.6
Worst Pair	45	36	36	12
<b>PS ACR-F (dB)</b>	20.5	20.5	20.6	21.8
Freq. (MHz)	47.8	47.8	986.0	986.0
Limit (dB)	53.9	53.9	27.6	27.6

PASS	MAIN	SR	MAIN	SR
Worst Pair	36-78	12-78	36-78	12-78
<b>ACR-N (dB)</b>	18.3	19.6	29.5	28.7
Freq. (MHz)	217.5	152.0	945.0	946.0
Limit (dB)	37.4	43.8	-4.2	-4.3
Worst Pair	36	36	45	78
<b>PS ACR-N (dB)</b>	19.2	19.4	32.8	30.3
Freq. (MHz)	193.0	193.0	1000.	946.0
Limit (dB)	36.9	36.9	-9.4	-7.3

PASS	MAIN	SR	MAIN	SR
Worst Pair	36	12	45	36
<b>RL (dB)</b>	4.5	4.7	5.5	5.2
Freq. (MHz)	596.0	456.0	985.0	987.0
Limit (dB)	10.0	10.0	8.1	8.1

Compliant Network Standards:  
 10BASE-T      100BASE-TX      100BASE-T4  
 1000BASE-T    10GBASE-T      ATM-25  
 ATM-51      ATM-155      100VG-AnyLan  
 TR-4      TR-16 Active      TR-16 Passive



**Cable ID: COPPER 002**

Date / Time: 04/30/2013 08:35:57 AM

Headroom 7.0 dB (NEXT 36-45)

Test Limit: TIA Cat 5e Channel

Cable Type: Cat 6A U/UTP

NVP: 68.2%

Operator: JOE

Software Version: V2.0 Build 1

Limits Version: V1.8

Calibration Date:

Main (Module): 02/07/2013

Remote (Module): 02/07/2013

**Test Summary: PASS**

Model: DSX-5000

Main S/N: 223344


Remote S/N: 1234567

Main Adapter: DSX-CHA004

Remote Adapter: DSX-CHA004


Length (ft), Limit 328	[Pair 12]	6
Prop. Delay (ns), Limit 555	[Pair 12]	9
Delay Skew (ns), Limit 50	[Pair 12]	0
Resistance (ohms), Limit 25.0	[Pair 12]	0.6
Insertion Loss Margin (dB)	[Pair 12]	23.7
Frequency (MHz)	[Pair 12]	100.0
Limit (dB)	[Pair 12]	24.0

Patch Cable BAD or Patch Cable too short

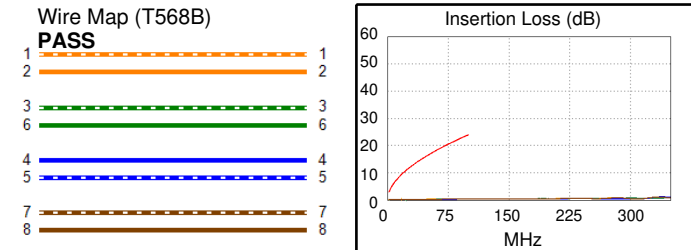


Worst Case Margin Worst Case Value


PASS	MAIN	SR	MAIN	SR
Worst Pair	36-45	36-45	36-45	12-45
<b>NEXT (dB)</b>	7.0	17.3	7.4	26.1
Freq. (MHz)	66.3	7.8	71.0	100.0
Limit (dB)	33.2	48.8	32.6	30.1
Worst Pair	36	45	36	45
<b>PS NEXT (dB)</b>	10.0	18.1	10.4	26.2
Freq. (MHz)	66.3	7.8	71.0	99.8
Limit (dB)	30.2	45.8	29.6	27.1

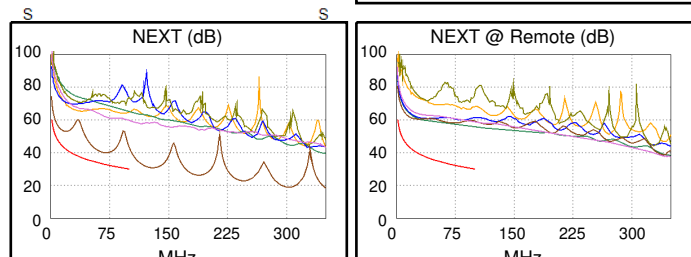


PASS	MAIN	SR	MAIN	SR
Worst Pair	45-12	12-45	12-45	45-12
<b>ACR-F (dB)</b>	30.0	30.0	30.5	30.5
Freq. (MHz)	68.8	68.8	100.0	100.0
Limit (dB)	20.7	20.7	17.4	17.4
Worst Pair	45	36	45	45
<b>PS ACR-F (dB)</b>	28.3	28.4	30.1	30.2
Freq. (MHz)	1.0	1.1	100.0	100.0
Limit (dB)	54.4	53.4	14.4	14.4

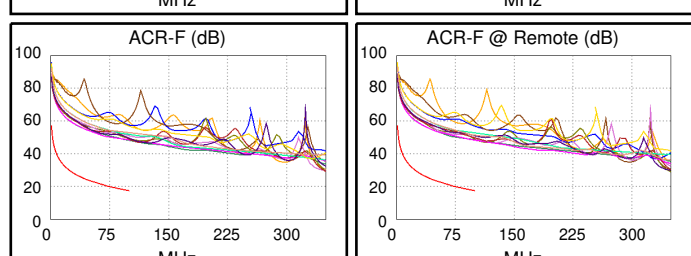

N/A	MAIN	SR	MAIN	SR
Worst Pair	36-45	36-45	36-45	12-45
<b>ACR-N (dB)</b>	13.2	21.4	27.0	49.8
Freq. (MHz)	2.1	2.3	71.0	100.0
Limit (dB)	54.8	54.3	12.7	6.1
Worst Pair	36	45	36	45
<b>PS ACR-N (dB)</b>	16.2	22.3	30.0	49.9
Freq. (MHz)	2.1	2.3	71.0	99.8
Limit (dB)	51.8	51.3	9.7	3.1

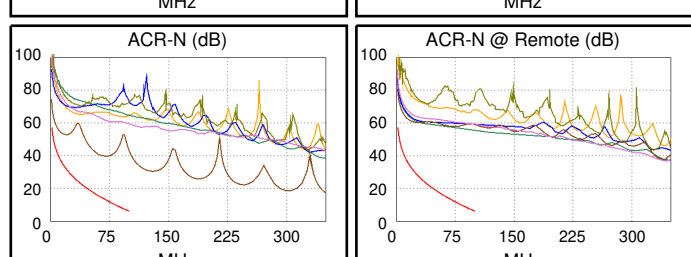

N/A	MAIN	SR	MAIN	SR
Worst Pair	45	45	45	45
<b>RL (dB)</b>	8.4	9.8	9.0	14.4
Freq. (MHz)	44.3	21.1	52.5	100.0
Limit (dB)	13.6	16.8	12.8	10.0

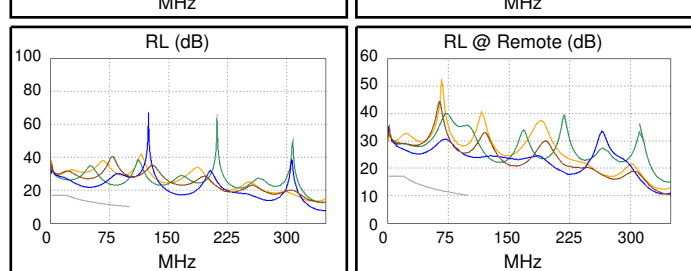

Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	2.5GBASE-T	5GBASE-T
ATM-25	ATM-51	ATM-155
100VG-AnyLan	TR-4	TR-16 Active
TR-16 Passive		



**Cable ID: COPPER 006**



Date / Time: 04/30/2013 08:43:56 AM  
**Headroom 4.7 dB (NEXT 12-36)**  
**Test Limit: ISO11801 Channel Class Ea**  
 Cable Type: Cat 6A U/UTP  
 NVP: 68.2%

Operator: JOE  
 Software Version: V2.0 Build 1  
 Limits Version: V1.8  
 Calibration Date:  
 Main (Module): 02/07/2013  
 Remote (Module): 02/07/2013

**Test Summary: PASS**

Model: DSX-5000  
 Main S/N: 223344  
 Remote S/N: 1234567  
 Main Adapter: DSX-CHA004  
 Remote Adapter: DSX-CHA004

Length (ft), Limit 328	[Pair 45]	15
Prop. Delay (ns), Limit 555	[Pair 78]	23
Delay Skew (ns), Limit 50	[Pair 78]	1
Resistance (ohms), Limit 25.0	[Pair 12]	0.7
Insertion Loss Margin (dB)	[Pair 12]	42.2
Frequency (MHz)	[Pair 12]	433.0
Limit (dB)	[Pair 12]	45.6

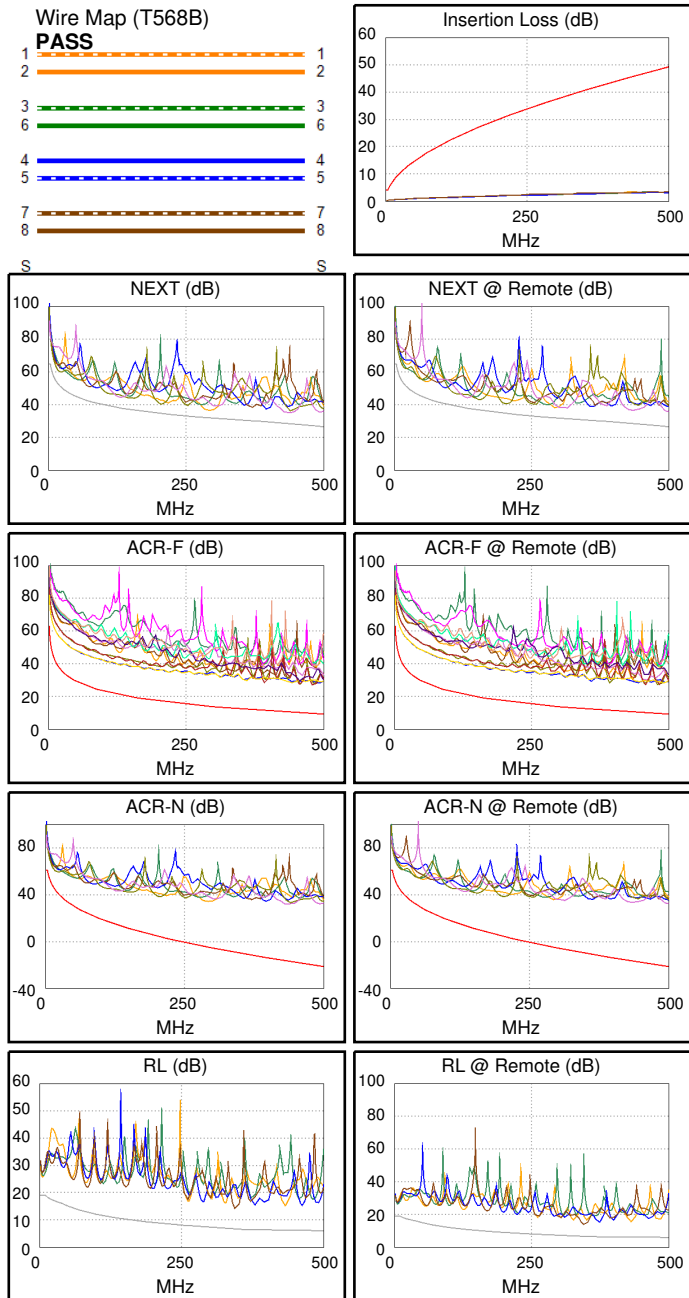

**Worst Case Margin Worst Case Value**

N/A	MAIN	SR	MAIN	SR
Worst Pair	12-36	36-78	45-78	45-78
<b>NEXT (dB)</b>	4.7	5.9	6.2	9.4
Freq. (MHz)	295.0	203.5	435.0	498.0
Limit (dB)	31.9	34.7	28.9	26.6
Worst Pair	78	78	78	78
<b>PS NEXT (dB)</b>	5.9	6.3	5.9	9.7
Freq. (MHz)	440.0	134.0	440.0	500.0
Limit (dB)	25.8	34.9	25.8	23.4

PASS	MAIN	SR	MAIN	SR
Worst Pair	45-36	36-45	45-36	36-45
<b>ACR-F (dB)</b>	16.9	16.8	17.0	17.1
Freq. (MHz)	393.0	395.0	483.0	483.0
Limit (dB)	11.4	11.3	9.6	9.6
Worst Pair	36	36	36	36
<b>PS ACR-F (dB)</b>	18.0	18.9	18.0	19.0
Freq. (MHz)	457.0	457.0	457.0	459.0
Limit (dB)	7.1	7.1	7.1	7.0

PASS	MAIN	SR	MAIN	SR
Worst Pair	36-78	36-78	45-78	45-78
<b>ACR-N (dB)</b>	15.7	17.1	48.8	54.0
Freq. (MHz)	12.3	11.4	435.0	498.0
Limit (dB)	48.0	48.8	-16.8	-21.3
Worst Pair	36	36	78	78
<b>PS ACR-N (dB)</b>	14.9	17.2	48.9	54.3
Freq. (MHz)	12.0	3.9	440.0	500.0
Limit (dB)	45.6	56.7	-20.2	-24.5

PASS	MAIN	SR	MAIN	SR
Worst Pair	78	78	78	78
<b>RL (dB)</b>	7.1	7.1	7.1	7.1
Freq. (MHz)	346.0	346.0	346.0	346.0
Limit (dB)	6.6	6.6	6.6	6.6

Compliant Network Standards:  
 10BASE-T      100BASE-TX      100BASE-T4  
 1000BASE-T    10GBASE-T      ATM-25  
 ATM-51        ATM-155        100VG-AnyLan  
 TR-4           TR-16 Active    TR-16 Passive



**Cable ID: COPPER 007**

Date / Time: 04/30/2013 08:44:27 AM

Headroom 5.1 dB (NEXT 36-78)

Test Limit: TIA Cat 6A Channel

Cable Type: Cat 6A U/UTP

NVP: 68.2%

Software Version: V2.0 Build 1

Limits Version: V1.8

Calibration Date:

Main (Module): 02/07/2013

Remote (Module): 02/07/2013

**Test Summary: PASS**

Model: DSX-5000


Main S/N: 223344

Remote S/N: 1234567

Main Adapter: DSX-CHA004


Remote Adapter: DSX-CHA004

Length (ft), Limit 328	[Pair 45]	15
Prop. Delay (ns), Limit 555	[Pair 78]	23
Delay Skew (ns), Limit 50	[Pair 78]	1
Resistance (ohms), Limit 25.0	[Pair 12]	0.7
Insertion Loss Margin (dB)	[Pair 12]	42.2
Frequency (MHz)	[Pair 12]	433.0
Limit (dB)	[Pair 12]	45.6




Wire Map (T568B)

**PASS**





Insertion Loss (dB)





Worst Case Margin Worst Case Value



PASS	MAIN	SR	MAIN	SR
Worst Pair	36-78	36-78	45-78	45-78
<b>NEXT (dB)</b>	5.4	5.1	9.1	8.4
Freq. (MHz)	206.0	201.5	495.0	498.0
Limit (dB)	34.6	34.7	26.2	26.1
Worst Pair	36	36	78	78
<b>PS NEXT (dB)</b>	6.4	6.3	7.8	9.2
Freq. (MHz)	252.0	209.5	442.0	500.0
Limit (dB)	30.1	31.5	24.6	23.2





PASS	MAIN	SR	MAIN	SR
Worst Pair	36-45	45-36	36-45	45-36
<b>ACR-F (dB)</b>	17.2	16.9	17.3	17.0
Freq. (MHz)	457.0	457.0	458.0	458.0
Limit (dB)	10.1	10.1	10.0	10.0
Worst Pair	36	36	36	36
<b>PS ACR-F (dB)</b>	18.6	18.8	18.6	18.8
Freq. (MHz)	457.0	458.0	457.0	458.0
Limit (dB)	7.1	7.0	7.1	7.0



N/A	MAIN	SR	MAIN	SR
Worst Pair	36-78	36-45	45-78	45-78
<b>ACR-N (dB)</b>	16.2	16.1	54.8	54.3
Freq. (MHz)	12.3	3.1	495.0	498.0
Limit (dB)	48.0	61.1	-22.8	-23.1
Worst Pair	36	36	78	78
<b>PS ACR-N (dB)</b>	14.9	16.3	50.8	55.2
Freq. (MHz)	12.3	4.0	442.0	500.0
Limit (dB)	45.4	56.4	-21.4	-26.1



PASS	MAIN	SR	MAIN	SR
Worst Pair	78	78	78	78
<b>RL (dB)</b>	7.3	6.9	7.3	6.9
Freq. (MHz)	346.0	345.0	346.0	345.0
Limit (dB)	6.6	6.6	6.6	6.6



Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	10GBASE-T	ATM-25
ATM-51	ATM-155	100VG-AnyLan
TR-4	TR-16 Active	TR-16 Passive



**Cable ID: COPPER 022**

Date / Time: 04/30/2013 09:28:28 AM

Headroom 7.3 dB (NEXT 12-36)

Test Limit: TIA Cat 6A Channel (+TCL)

Cable Type: Cat 6A U/UTP

NVP: 68.2%

Operator: JOE

Software Version: V2.0 Build 1

Limits Version: V1.8

Calibration Date:

Main (Module): 02/07/2013

Remote (Module): 02/07/2013

**Test Summary: PASS**

Model: DSX-5000

Main S/N: 223344

Remote S/N: 1234567

Main Adapter: DSX-CHA004

Remote Adapter: DSX-CHA004


Length (ft), Limit 328	[Pair 36]	14
Prop. Delay (ns), Limit 555	[Pair 78]	22
Delay Skew (ns), Limit 50	[Pair 78]	1
Resistance (ohms), Limit 25.0	[Pair 12]	0.8
Insertion Loss Margin (dB)	[Pair 78]	44.4
Frequency (MHz)	[Pair 78]	468.0
Limit (dB)	[Pair 78]	47.6



14 ft





Wire Map (T568A)





Worst Case Margin Worst Case Value



PASS	MAIN	SR	MAIN	SR
Worst Pair	12-78	12-36	12-78	12-78
<b>NEXT (dB)</b>	7.5	7.3	7.5	9.2
Freq. (MHz)	500.0	220.5	500.0	500.0
Limit (dB)	26.1	34.1	26.1	26.1
Worst Pair	12	36	12	78
<b>PS NEXT (dB)</b>	8.9	9.6	9.0	10.3
Freq. (MHz)	499.0	273.0	500.0	500.0
Limit (dB)	23.3	29.5	23.2	23.2

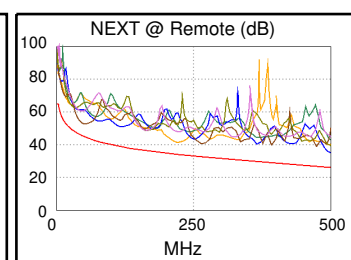



PASS	MAIN	SR	MAIN	SR
Worst Pair	36-45	45-36	36-45	45-36
<b>ACR-F (dB)</b>	11.7	11.5	11.7	11.5
Freq. (MHz)	489.0	489.0	489.0	489.0
Limit (dB)	9.5	9.5	9.5	9.5
Worst Pair	45	36	45	36
<b>PS ACR-F (dB)</b>	14.6	14.4	14.6	14.4
Freq. (MHz)	488.0	488.0	488.0	488.0
Limit (dB)	6.5	6.5	6.5	6.5

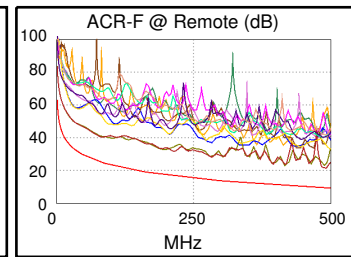

N/A	MAIN	SR	MAIN	SR
Worst Pair	12-36	36-45	12-78	12-78
<b>ACR-N (dB)</b>	20.7	20.9	53.9	55.6
Freq. (MHz)	3.3	44.0	500.0	500.0
Limit (dB)	60.7	32.3	-23.2	-23.2
Worst Pair	12	12	12	78
<b>PS ACR-N (dB)</b>	20.7	21.5	55.5	56.7
Freq. (MHz)	3.3	3.4	500.0	500.0
Limit (dB)	58.2	57.9	-26.1	-26.1

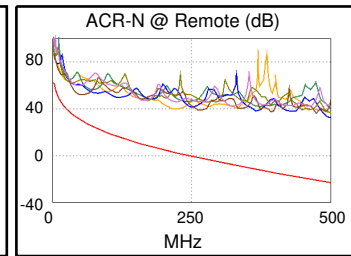

PASS	MAIN	SR	MAIN	SR
Worst Pair	36	78	36	78
<b>RL (dB)</b>	4.1	6.8	4.1	6.8
Freq. (MHz)	495.0	436.0	495.0	436.0
Limit (dB)	6.0	6.0	6.0	6.0

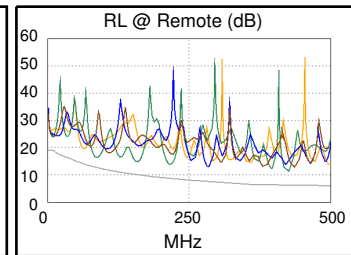

Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	10GBASE-T	ATM-25
ATM-51	ATM-155	100VG-AnyLan
TR-4	TR-16 Active	TR-16 Passive



**Cable ID: COPPER 022**

Date / Time: 04/30/2013 09:28:28 AM

Headroom 7.3 dB (NEXT 12-36)

Test Limit: TIA Cat 6A Channel (+TCL)

Cable Type: Cat 6A U/UTP

NVP: 68.2%

Operator: JOE

Software Version: V2.0 Build 1

Limits Version: V1.8

Calibration Date:

Main (Module): 02/07/2013

Remote (Module): 02/07/2013

**Test Summary: PASS**

Model: DSX-5000

Main S/N: 223344





Remote S/N: 1234567

Main Adapter: DSX-CHA004

Remote Adapter: DSX-CHA004

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
<b>N/A</b>				
Worst Pair	78	45	36	12
<b>TCL (dB)</b>	10.5	11.3	17.2	14.7
Freq. (MHz)	1.0	1.0	250.0	193.5
Limit (dB)	50.0	50.0	14.0	15.7

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
<b>N/A</b>				
Worst Pair	78	45	36	36
<b>ELTCTL (dB)</b>	24.6	24.1	44.6	45.7
Freq. (MHz)	1.0	1.0	30.0	29.9
Limit (dB)	30.0	30.0	0.5	0.5

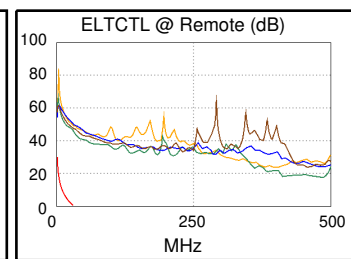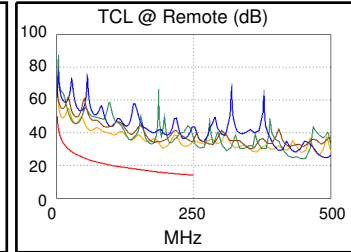





**Cable ID: COPPER 023**

Date / Time: 04/30/2013 09:29:32 AM

Headroom 7.0 dB (NEXT 12-78)

Test Limit: ISO11801 Channel Class Ea (+All)

Cable Type: Cat 6A U/UTP

NVP: 68.2%

Operator: JOE

Software Version: V2.0 Build 1

Limits Version: V1.8

Calibration Date:

Main (Module): 02/07/2013

Remote (Module): 02/07/2013

**Test Summary: PASS**

Model: DSX-5000

Main S/N: 223344

Remote S/N: 1234567

Main Adapter: DSX-CHA004

Remote Adapter: DSX-CHA004

Length (ft), Limit 328	[Pair 36]	14
Prop. Delay (ns), Limit 555	[Pair 78]	22
Delay Skew (ns), Limit 50	[Pair 78]	1
Resistance (ohms), Limit 25.0	[Pair 78]	0.7
Insertion Loss Margin (dB)	[Pair 78]	44.4
Frequency (MHz)	[Pair 78]	468.0
Limit (dB)	[Pair 78]	47.6



14 ft





Wire Map (T568A)





Worst Case Margin Worst Case Value



N/A	MAIN	SR	MAIN	SR
Worst Pair	12-78	12-36	12-78	12-78
<b>NEXT (dB)</b>	7.0	7.3	7.1	8.8
Freq. (MHz)	498.0	220.5	500.0	500.0
Limit (dB)	26.6	34.1	26.5	26.5
Worst Pair	12	36	12	78
<b>PS NEXT (dB)</b>	8.7	9.6	8.8	10.1
Freq. (MHz)	499.0	274.0	500.0	500.0
Limit (dB)	23.5	29.5	23.4	23.4

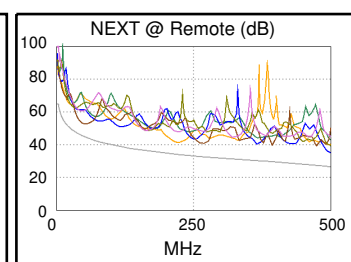



PASS	MAIN	SR	MAIN	SR
Worst Pair	36-45	45-36	36-45	45-36
<b>ACR-F (dB)</b>	11.7	11.5	11.7	11.5
Freq. (MHz)	489.0	489.0	489.0	489.0
Limit (dB)	9.5	9.5	9.5	9.5
Worst Pair	45	36	45	36
<b>PS ACR-F (dB)</b>	14.6	14.4	14.6	14.4
Freq. (MHz)	488.0	488.0	488.0	488.0
Limit (dB)	6.5	6.5	6.5	6.5

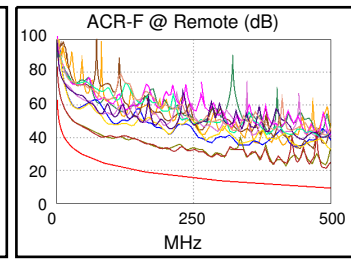

PASS	MAIN	SR	MAIN	SR
Worst Pair	12-36	36-45	12-78	12-78
<b>ACR-N (dB)</b>	20.8	20.9	52.1	53.8
Freq. (MHz)	3.4	44.0	500.0	500.0
Limit (dB)	60.2	32.3	-21.4	-21.4
Worst Pair	36	12	12	78
<b>PS ACR-N (dB)</b>	20.8	21.5	53.9	55.1
Freq. (MHz)	3.4	3.3	500.0	500.0
Limit (dB)	57.7	58.0	-24.5	-24.5

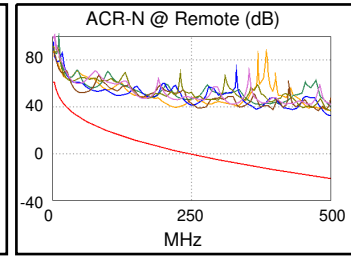

PASS	MAIN	SR	MAIN	SR
Worst Pair	36	78	36	78
<b>RL (dB)</b>	4.2	6.9	4.2	6.9
Freq. (MHz)	496.0	437.0	496.0	437.0
Limit (dB)	6.0	6.0	6.0	6.0

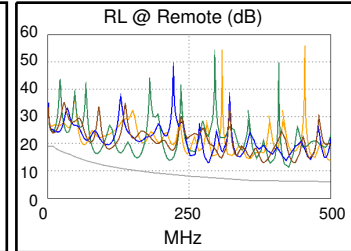

Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	10GBASE-T	ATM-25
ATM-51	ATM-155	100VG-AnyLan
TR-4	TR-16 Active	TR-16 Passive



**Cable ID: COPPER 023**

Date / Time: 04/30/2013 09:29:32 AM

Headroom 7.0 dB (NEXT 12-78)

Test Limit: ISO11801 Channel Class Ea (+All)

Cable Type: Cat 6A U/UTP

NVP: 68.2%

Operator: JOE

Software Version: V2.0 Build 1

Limits Version: V1.8

Calibration Date:

Main (Module): 02/07/2013

Remote (Module): 02/07/2013

**Test Summary: PASS**

Model: DSX-5000

Main S/N: 223344

Remote S/N: 1234567

Main Adapter: DSX-CHA004

Remote Adapter: DSX-CHA004

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
N/A				
Worst Pair	12	12	36	12
<b>TCL (dB)</b>	11.1	10.6	18.9	15.9
Freq. (MHz)	8.0	8.3	250.0	194.0
Limit (dB)	39.5	39.3	12.3	14.5
N/A				
Worst Pair			12-45	12-45
<b>CDNEXT (dB)</b>			21.5	21.6
Freq. (MHz)			483.0	484.0
Limit (dB)				
N/A				
Worst Pair			36	36
<b>CMRL (dB)</b>			5.3	4.8
Freq. (MHz)			258.0	232.5
Limit (dB)				
N/A				
Worst Pair	78	45	36	36
<b>ELTCTL (dB)</b>	24.6	24.1	44.6	45.7
Freq. (MHz)	1.0	1.0	30.0	30.0
Limit (dB)	30.0	30.0	0.5	0.5

