

Pomona®

Model 4240 Type "N" Male Terminated Plug

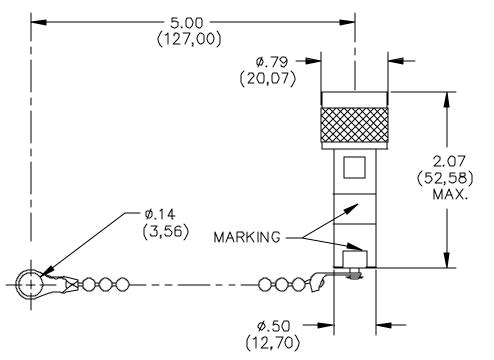



MATERIALS:

Body and Fittings: Brass, Tarnish Resistant Plating. Center Contact: Brass, Gold Plated. Dielectric: Teflon Gasket: Silicone rubber Resistor: Deposited carbon film Marking: "Pomona 4240" Label: "TERM, *Ω 1W"

RATINGS:

Frequency Range: DC to 500 MHz Resistance Tolerance: ± 1% Power: 1W @ 70°C Max.

ORDERING INFORMATION: Model 4240-*

*= Resistance Value 50, 75, 600

Ordering Example: 4240-50 = 50 Ohm Value Resistance

All dimensions are in inches. Tolerances (except noted): $.xx = \pm.02$ " (.51 mm), $.xxx = \pm.005$ " (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

 6/9/99
 Sales: 800-490-2361 Fax: 888-403-3360

 SY/EH/LS
 Technical Assistance: 800-241-2060

 SYEngineering \Release\DataSheets\FlukeDataSheetd4240 1 01.doc
 101.doc

www.valuetronics.com