


# Model 5689A Replaceable Tip Test Probe with Banana Jack

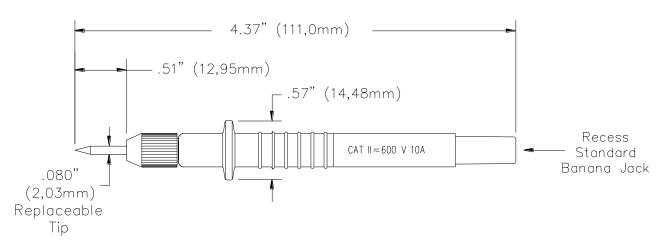

### **FEATURES:**

- Modular Test Probe
- Replaceable tip
- Comes with two Stainless-Steel Sharp Point Tips: Model 4172

## **MATERIALS:**

Replaceable Tip Probe: Stainless Steel

Tip O.D.: 0.080" Body: Nylon **RATINGS:** 

Operating Voltage: 600 Vrms per IEC 61010-031, Category II.

Operating Current: 10 Amperes

#### ORDERING INFORMATION:

Model 5689A

# **Replaceable Tips:**

Model 5133: SMD Microtip, Stainless-Steel Sharp Point


Model 6364: Set of replaceable tips

- -5688: Standard
- -4174: Stainless-Steel Sharp Point
- -5133: SMD Microtip, Stainless-Steel Sharp Point
- -4988: Needle Stainless-Steel Sharp Point

#### **Modular Test Leads:**

Model 5907A: Right-Angle Banana Plug to Straight Banana Plug Model 5908A: Straight Banana Plug to Straight Banana Plug

Model 5909A: Right-Angle Banana Plug to Right-Angle Banana Plug



Technical Support: <a href="mailto:technicalsupport@pomonatest.com">technicalsupport@pomonatest.com</a>

Fax: 425-446-5844

**Europe:** 31-(0) 40 2675 150 International: 425-446-5500

Where to Buy: www.pomonaelectronics.com



All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.