


Technical Data Sheet

Model 6479

Stainless Steel Sharp Tip Probe Set

CE

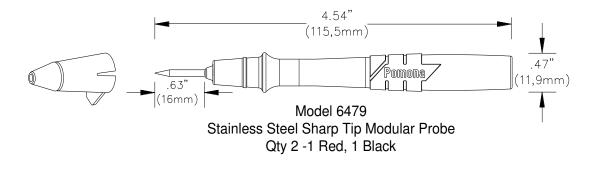

FEATURES

- Designed to meet IEC 61010-031, the latest international safety standard for test accessories.
- Heavy-duty stainless steel tip has a sharp point for piercing paint, conformal coatings, surface contaminants and wire insulation.
- Probe tip mates into standard 0.080" pin jacks.
- Probe uses a 4mm double insulated banana jack to accept modular style test leads, such as Pomona models 5907A, 5908A, 5909A, 6358 and 6467.

MATERIALS

Probe Body: Black or Red Polypropylene

Tip: Hardened stainless steel, sharp point .080" (2mm) tip

Jack: Nickel plated brass, .166" (4mm) safety style sheathed banana jack

RATINGS

Operating Voltage: IEC 61010-031, CAT III 1000V (with protective cap), CAT II 1000V (without protective cap) Current: 10 Amperes

ORDERING INFORMATION

Model 6479 (Set includes one black and one red probe)

Probes can be used with the following Pomona CE test lead sets:

- 5907A Straight banana plug to right-angle banana plug test lead set; length 48" (122.0cm)
- 5908A Straight banana plug to straight banana plug test lead set; length 48" (122.0cm)
- 5909A Right-angle banana plug to right-angle banana plug test lead set; length , 48" (122.0cm)
- 6358 Straight banana plug to Retractable sheath banana plug test lead set; length 48" (122.0cm)
- 6467 Straight banana plug to Stacking banana plug test lead set; length 48" (122.0cm)

USA: Sales: 800-490-2361 Technical Support: technicalsupport@pomonatest.com Fax: 425-446-5844 Europe: 31-(0) 40 2675 150 International: 425-446-5500 Where to Buy: www.pomonaelectronics.com

www.valuetronics.com

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

