



# Universal Radio Communication Tester CMU200

THE multiprotocol tester for current and future mobile radio networks

- ◆ Extremely high-speed testing
- ◆ Highly accurate measurements
- ◆ Modular future-proof design
- ◆ Comprehensive spectrum analyzer
- ◆ Fast switching between networks



**ROHDE & SCHWARZ**

# Testing the 3rd generation

For more than 60 years Rohde&Schwarz has always been at the forefront of mobile radio technology. We continue this tradition of RF test and measurement with the Universal Radio Communication Tester CMU200. The CMU200 is a third-generation platform design that offers true scalable multimode functionality.

The CMU200 reflects the long-standing expertise Rohde&Schwarz has gained in the world of mobile radio. In recent years, the company has helped to launch overwhelmingly successful mobile radio systems.

Rohde&Schwarz is a preferred supplier to many of the leading mobile equipment manufacturers and is the market leader for mobile radio test sets.

The CMU200 is part of a complete range of mobile radio test equipment, encompassing everything from conformance test systems to system simulators, turn-key functional board test / final test systems and simple sales-counter Go/NoGo testers.

The base unit with its standard-independent module test provides many general-purpose measurement facilities for the development of all kinds of standards within its wide and continuous frequency range. If extended by the relevant options, the CMU200 offers the hardware and software necessary to handle your 3G, 2.5G and previous-generation testing applications, including analog.

## Low cost of ownership


Selecting the CMU 200 is a decision for the future and results in a total cost of ownership which is sure to be among the lowest due to the following factors:

- ◆ Completely modular design of hardware and software components avoids unnecessary investments right from the start just because there is a possibility of a feature being needed sometime in the future. You only pay for what you need
- ◆ Should an extension become necessary because your needs widen after some time – the modularity of the CMU200 concept will cater for that. Many extensions to the unit may be installed onsite. You only pay for it when you need it
- ◆ The concept allows two complete channels (RF, signalling and evaluation) to be installed in one CMU200 unit
- ◆ Maximum production output in a compact 4-rack-unit-high package with minimum power dissipation allows compact production space layout
- ◆ With the CMU200 user interface even less experienced users will intuitively get it right without the need for extensive training
- ◆ A new remote interface syntax reflects the inherent modularity of this real multimode tester



*The CMU200 targets a wide range of applications, but is primarily optimized for the high accuracy and speed demanded in an ever more quality-conscious manufacturing process. The picture shows the front panel for desktop use.*



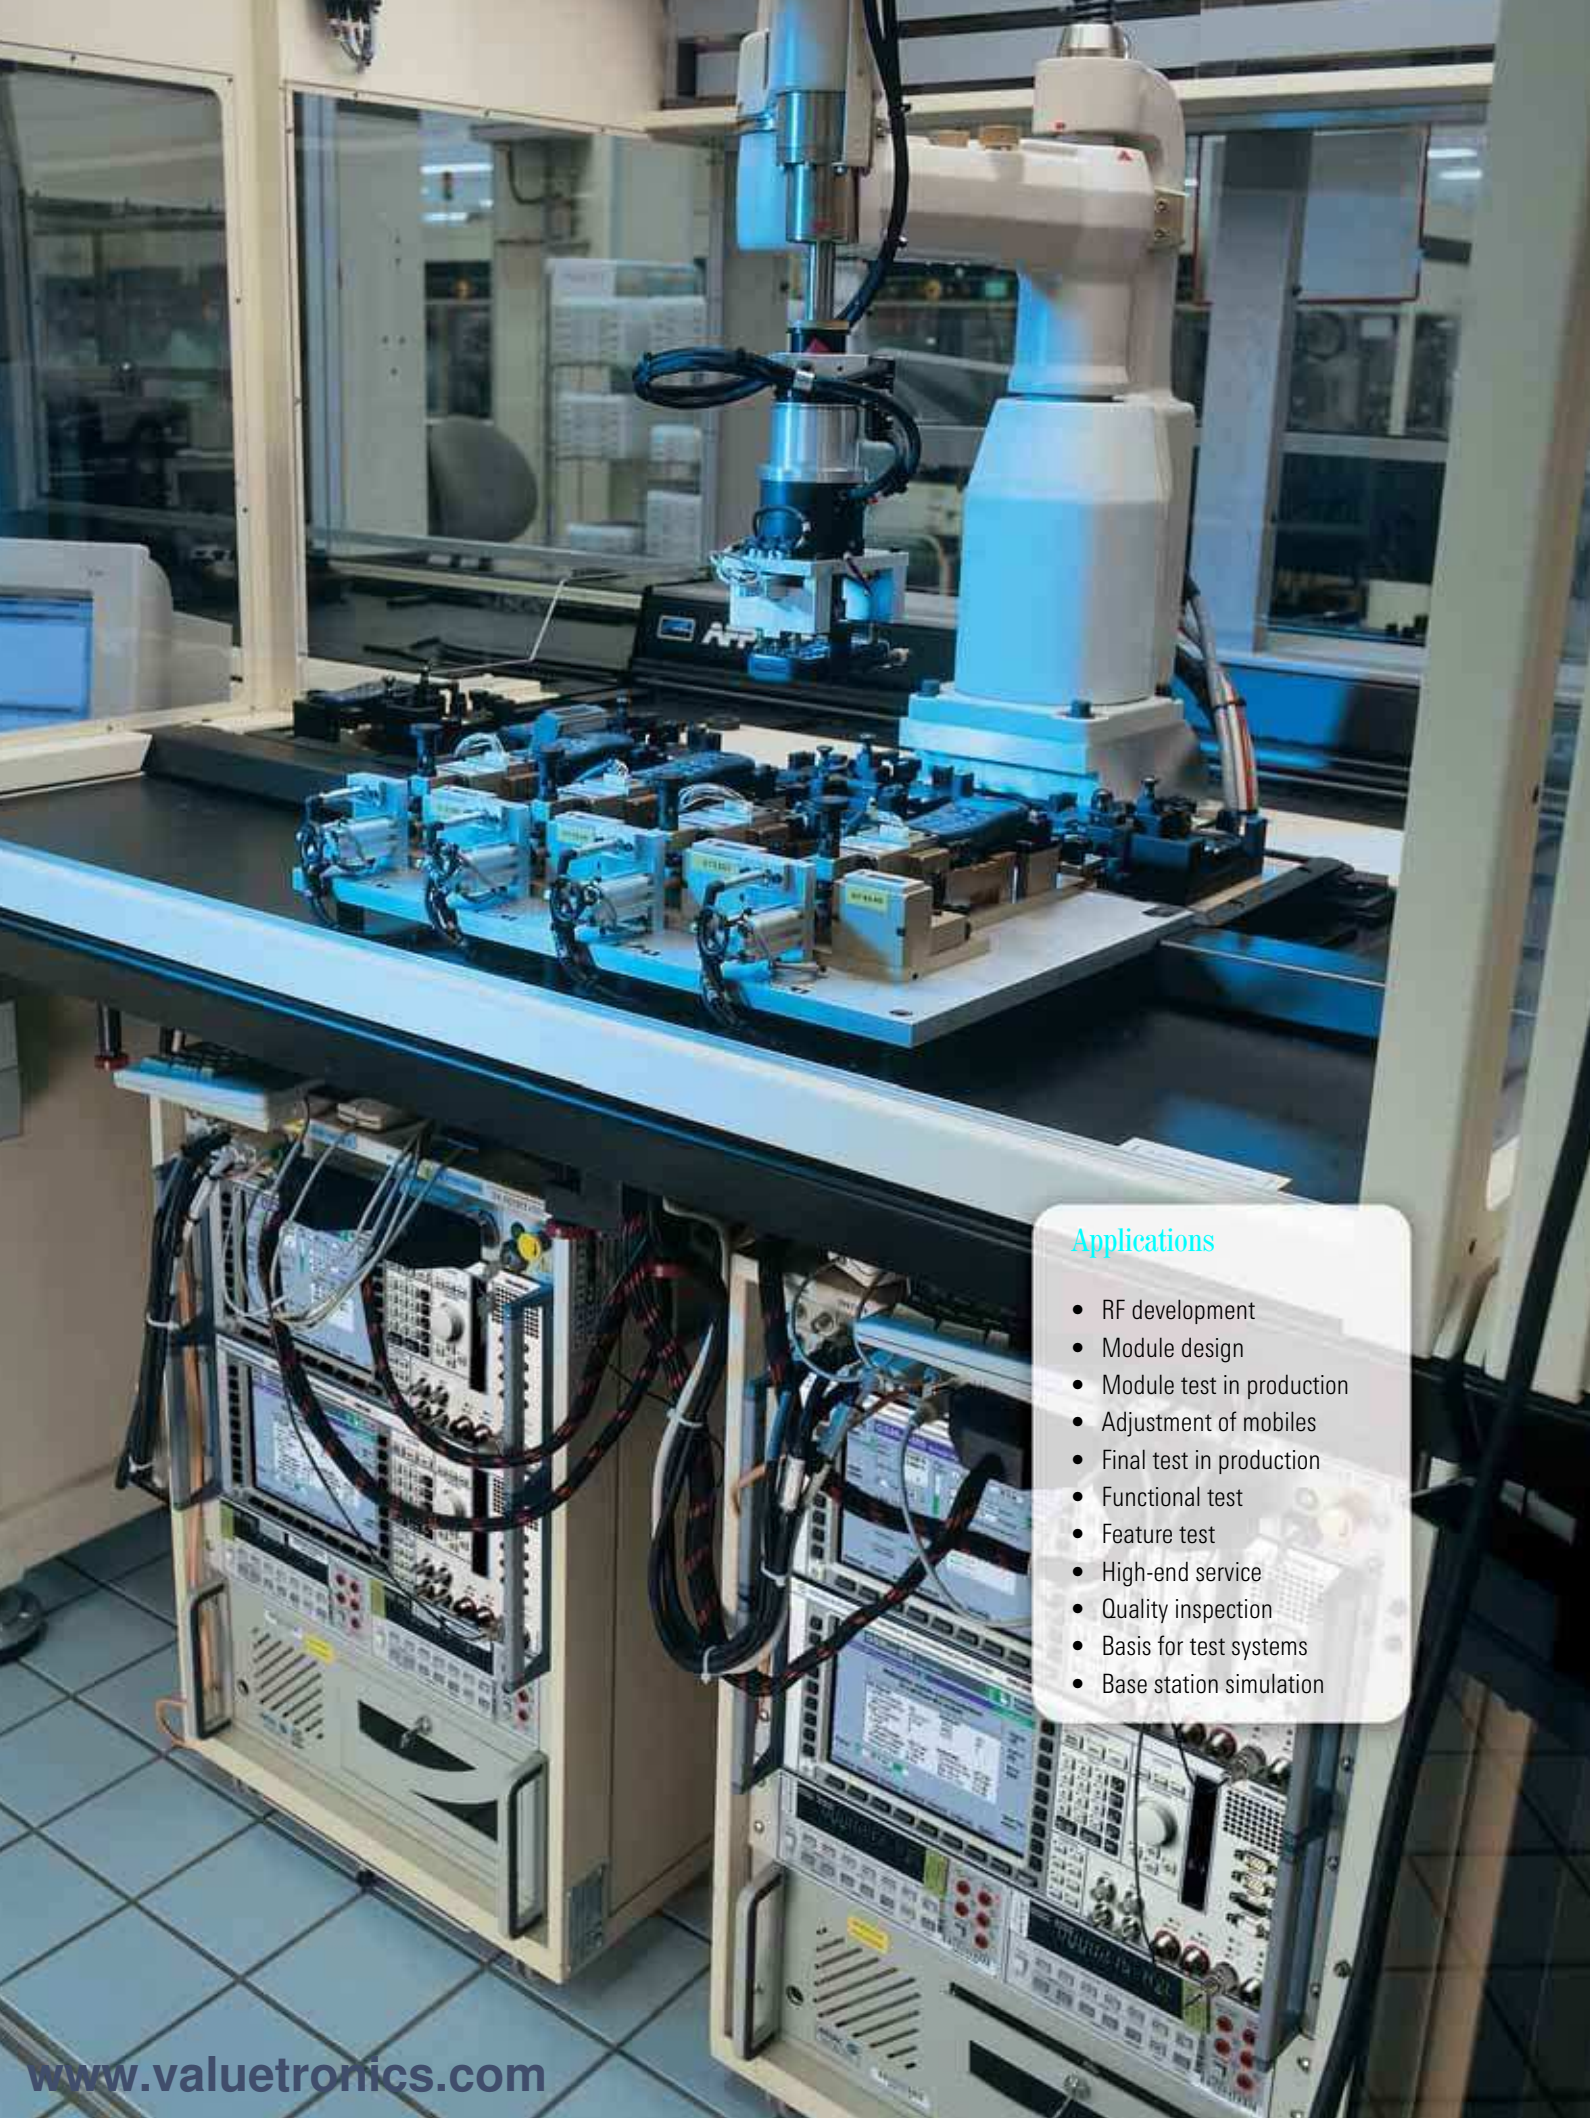

### Applications

- RF development
- Module design
- Module test in production
- Adjustment of mobiles
- Final test in production
- Functional test
- Feature test
- High-end service
- Quality inspection
- Basis for test systems
- Base station simulation

# Usability

## The CMU200 key strengths

The Radio Communication Tester CMU200 brings premium cost effectiveness through a variety of features, with extremely fast measurement speed and very high accuracy being the two most important ones. In addition, the secondary remote addressing of the unit's modular architecture makes for intelligent and autonomous processing of complete measurement tasks and fast control program design.


## Greatest accuracy

In a production environment the unit's high accuracy allows DUTs (devices under test) to be trimmed for maximum battery lifetime without compromising quality. In the lab, the CMU200 enables the development engineer to partly replace conventional, dedicated premium-quality instruments and save desktop space at the same time. High-precision measurement correction over the whole frequency and dynamic range as well as compensation for temperature effects in realtime are critical factors for achieving the CMU200's excellent accuracy.

The globally standardized Rohde&Schwarz calibration system can check the CMU200's accuracy in a service center close to you or, volume permitting, on your premises. A world-wide network of these standardized automatic calibration systems has been implemented in our service centers. Highly accurate and repeatable calibration can be performed wherever you are. Your local Rohde&Schwarz representative offers customized service contracts for the unit. For large-scale users of the CMU200, a compact level verification system is available in addition.

Thanks to the high resolution of the extremely bright high-contrast TFT display even the finest details can be displayed

Direct branching to all associated menus makes for a uniquely flat menu structure

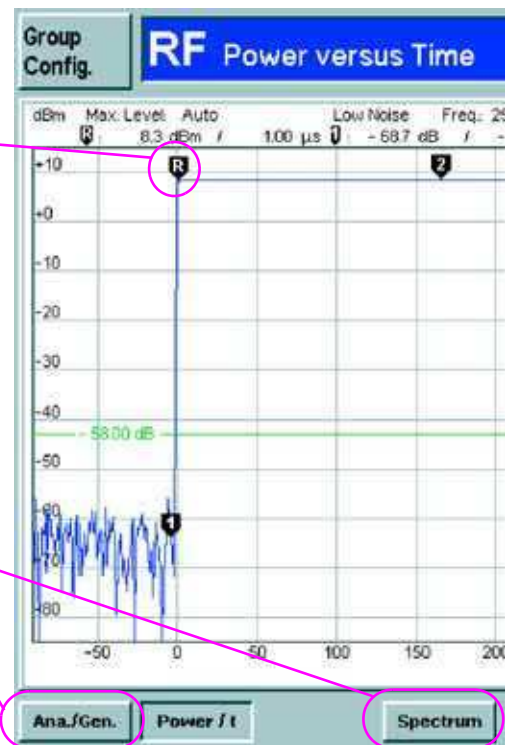

## Greatest speed

The high processing speed is due to extensive use of ProbeDSP™ technology, parallel measurements and innovative remote command processing.

- ◆ ProbeDSP™ technology  
The modular architecture relies on decentralized ProbeDSP™ processing coordinated by a powerful central processor. Like an oscilloscope probe, DSPs dedicated to a specific local data acquisition and evaluation workload help to keep subsystem performance at an uncompromising maximum even if additional modules are fitted to the CMU200 mainframe.
- ◆ Parallel measurements  
Several RX and TX measurements can be performed in parallel. This is achieved by the fast response of the CMU200's modular hardware as well as the high overall processing power of the unit and the avoidance of bottlenecks by dedicated operation of

the ProbeDSP™ technology employed. Examples of parallel operation are measurements of BER and simultaneous phase/frequency error, EVM, magnitude error and audio, or the various spectrum measurements.

- ◆ Innovative remote processing  
The novel secondary addressing mode can address similar functions of each of the CMU200 subsystems (i.e. different mobile radio standards) in an almost identical way. Using this type of addressing, new remote test sequences can be programmed by a simple cut and paste operation followed by editing specific commands to adapt the control program to the new application. Secondary addressing is fully SCPI-compliant, which means that a subsystem address, for example WCDMA-FDD, can be replaced by a string denoting a different subsystem, i.e. another mobile radio standard.




As the CMU200 offers many of its measurements in signalling and non-signalling mode, this easy visual indication of the signalling state is provided as part of the status line

This symbol shows the instrument status, i.e. remote or manual operation

For increased speed, measurements not required can be switched off to free resources for the measurements you want to focus on

Measurements are configured by pressing the softkey marked with the yellow triangle two times

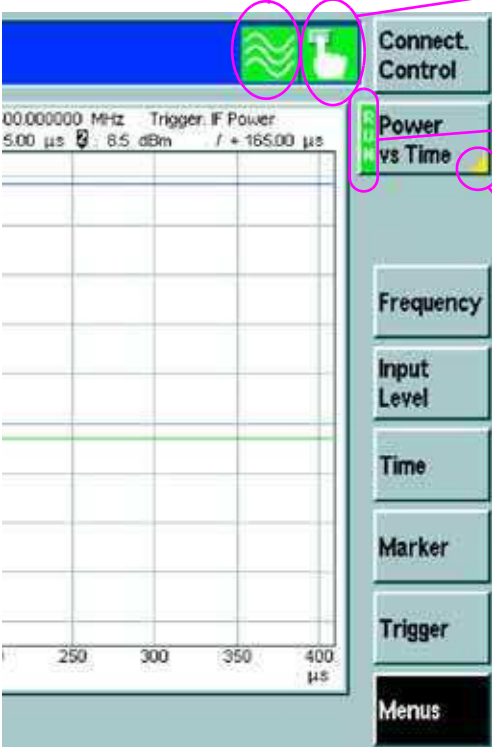

## Greatest reliability

The CMU200 employs an ultra-effective heat management between housings and individual components as well as between heat sinks and air flow. Together with the independent cooling cycles for different modules, this adds up to an optimized cooling system.

## The base unit

The base unit without any options installed can be used for testing general parameters of 1st, 2nd or 3rd generation mobile phones. The CMU200 base unit is the ideal solution for tasks at module level, i.e. at the early production stages of all cellular standards.

Constituent parts of the CMU200 base unit are the RF generator and RF analyzer which are complemented by a versatile, network-independent time domain menu and a comprehensive spectrum analyzer. The illustration above shows a power versus time measurement as an example.

By combining graphical and numerical overview menus the user can select the optimal view when the CMU200 is in manual mode.

The menu structure of the CMU200 is very flat and uses context-sensitive selection, entry and configuration pop-up menus.

Advanced operational ergonomics have been incorporated into a most compact and lightweight, 4-rack-units-high package.

## Key advantages of the CMU200

### Speed

- ◆ Unrivalled speed of single measurements

### Accuracy

- ◆ Incomparable accuracy
- ◆ Excellent result repeatability

### Modularity

- ◆ Modular hardware and software concept provides easy extension to further functionality

### Reliability

- ◆ Extremely low power consumption and effective heat conduction result in unparalleled reliability

### Future-proof

- ◆ Easy migration to emerging standards

# Optimized solutions for your production test requirements

Rohde&Schwarz supports CMU200-based production test solutions through a comprehensive network of application engineering sites. The backbone of this network consists of the four system integration centers located in Asia, North America and Europe.

## System integration services

Regional center project teams offer local system integration, service and support. A team of experts is ready to provide turn-key solutions, including test case programming. Custom-tailored project solutions and site process optimization are major aspects of our services. For fully automated production environments, we offer inline solutions together with our partners in the field of automation. As an example, a fully automated final test fixture including RF test, audio test, keypad test and optical inspection is shown in the picture.


## Time to market

The key to commercial success is the time required to get a new product to market in large numbers. The crucial point is the fast transition from product development to mass production. The Cellular Phone Production Test Platform TS7100 featuring the CMU200 meets this challenge.

## TS7100 description in brief

The stringent requirements to be met in the production of mobile phones make it necessary to implement new strategies for the specification of test systems. The test system architecture is based on two CMU200s to provide optimum throughput.

The TSVP (Test System Versatile Platform) test platform is based on the industry standard Compact PCI/PXI. This new type of bus is up to 6 times faster than previous industry bus standards. The TSVP's CompactPCI frame is 100% compatible to the industry standard but features 14 up to 31 slots. It comprises a state-of-the-art

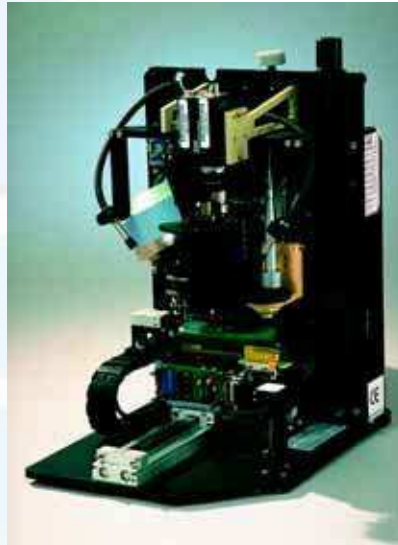


controller PC, a digital multimeter and selectable switching and test modules. For each DUT the test hardware for switching and stimulus functions is implemented as a dedicated set of modules.

The TSVP takes up all modules used for control and additional measurements.

Off-the-shelf CompactPCI/PXI modules can be added. Up to 4 sets of modules for testing DUTs can be inserted. The software can thus simultaneously use the resources of the parallel equipment to maximize speed in highly automated production. We can offer optimally configured test systems customized to your production environment.

## Test executive & generic test software library features

The parallel hardware is fully supported by TestStand, the industry-wide test executive from National Instruments. A user-friendly connection to the available device drivers has been created to provide faster use of the test executive. This connection is established by the Generic Test Software Library (GTSL). At the same time the toolkit concept provides ready-to-run test cases, which can be customized by the user as required.

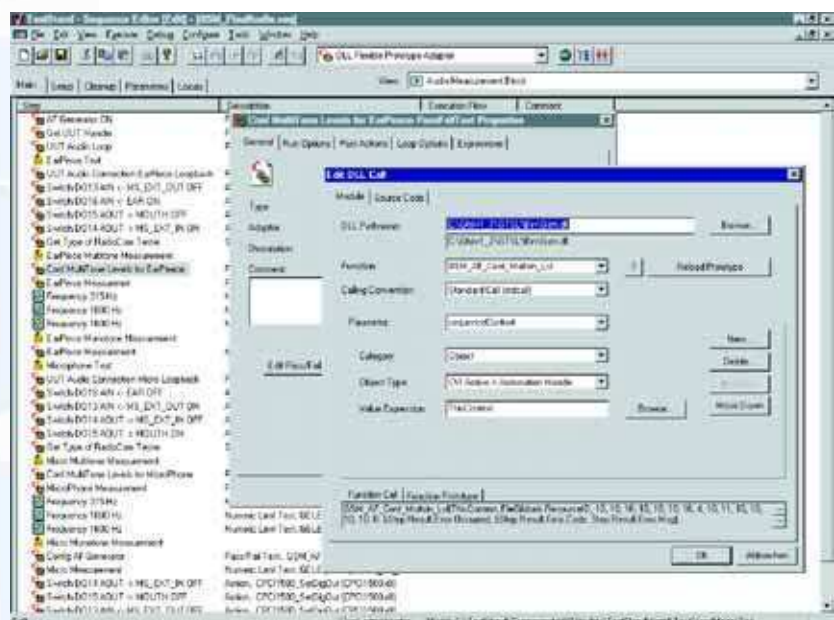

*GTSL in action*



**TS7100:**  
example of a  
2-channel ultra-  
low-profile config-  
uration with PSU  
and switch matrix  
fitted to rear of  
rack

## TS7100 features in brief


- ◆ High throughput by parallel testing of cellular phones
- ◆ All hardware and software components based on industry standards
- ◆ System controller based on CompactPCI/PXI bus architecture
- ◆ One system for functional board test, phone calibration and final test
- ◆ One system for all major cellular phone standards
- ◆ Easy expansion to 3rd generation technologies
- ◆ Ready-to-run Rohde & Schwarz test library for immediate use or customization
- ◆ Modular and versatile hardware/software platform
- ◆ Reduced costs due to generic concept

## Software concept in brief

- ◆ Software platform based on LabWindows/CVI and TestStand from National Instruments
- ◆ GTSL includes ready-to-run test cases for the standards supported by the CMU200
- ◆ Functional test sequences for RF test, calibration, signalling test, audio and acoustic test of mobile phones are supported
- ◆ Transparent and open library can be extended by the user
- ◆ Operator interface and test cases can be easily customized
- ◆ Parallel test of multiple cellular phones is fully supported
- ◆ GTSL supports multithreading and instrument sharing if needed
- ◆ Test development time is reduced by as much as 80 %

For more detailed information see separate TS7100 data sheet (PD 757.5737).

**Block diagram**  
for a 2-channel  
configuration  
of TS7100

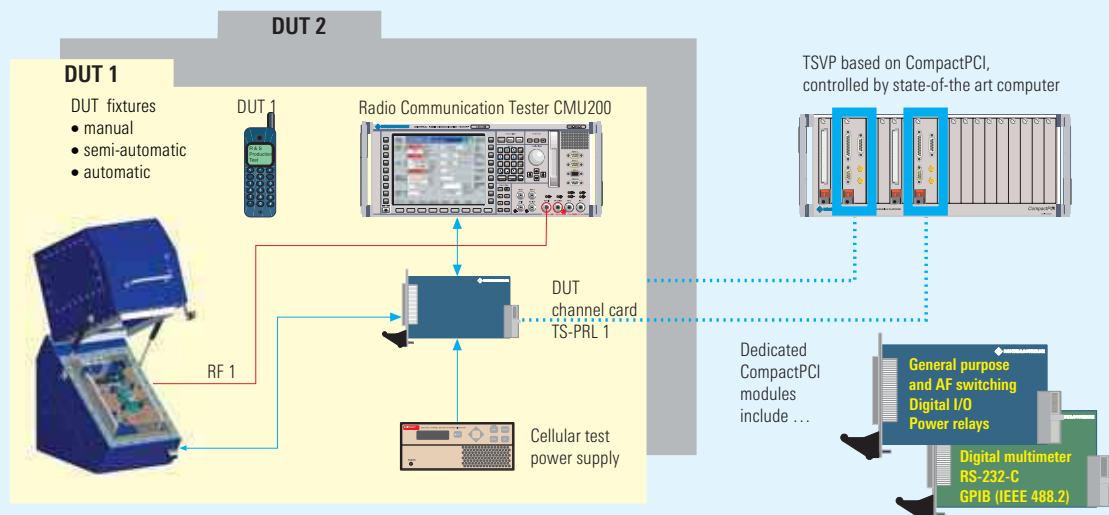

# Ready for today's networks ...

## GSM today

Since its introduction in the early nineties, the GSM system has won acceptance and undergone an evolution that no one could have foreseen.

The applications of the GSM system are numerous and are currently:

- ◆ GSM400
- ◆ GSM850
- ◆ GSM900 including
  - P-GSM (primary GSM)
  - E-GSM (extended GSM)
  - R-GSM (railway GSM)
- ◆ GSM1800 (DCS)
- ◆ GSM1900 (PCS)

Whether the application is in production, service or development, the flexible concept of the CMU 200 caters for practically all requirements: from basic RF signal generation, frequency, power and spectrum analyzer measurements for alignment of modules in production or development, to full GSM-specific signalling in any of the above-mentioned bands, as well as module tests on frequencies anywhere in the range from 10 MHz to 2700 MHz.

## Signalling mode

The CMU200 simulates a GSM base station RF interface providing the signalling flexibility necessary to test the behaviour of the mobile under the influence of different signalling parameters. These parameters are normally set by the network operator but can be reproduced by the CMU200 for test purposes. The unit supports the latest fast location update and direct paging features.



*...making the right connections.*

## Reduced signalling synchronized mode

The CMU200 provides the same functionality as in the signalling mode, but discards any signalling reaction from the mobile connected. This mode of operation enables both testing of modules that only have layer 1 operation and very fast RF testing in production environments. It can also skip the location update procedure in order to save time.

## Non-signalling mode

This mode serves for generating a signal with GSM-specific midambles and modulation in the entire frequency range from 10 MHz to 2.7 GHz. The analyzer offers the same flexibility for GSM-specific transmitter measurements such as

- ◆ modulation analysis
- ◆ average and peak burst power
- ◆ power versus time, power versus slot, power versus frame
- ◆ spectrum due to switching/modulation

## GSM development

As an all-round tool for GSM development engineers, the CMU 200 is an unsurpassed solution. The RF interface provides four input and output connectors offering a wide range of signal levels for generation and analysis of RF signals. Input only, as well as combined input/output connectors, can analyze mobiles or modules with a sensitivity down to -80 dBm and up to +47 dBm for the power meter. RF signals can be generated with levels from -130 dBm up to +13 dBm, depending on the selected connector. All measurement tolerances are set by default according to the GSM 11.10 and GSM 05.05 recommendations but may of course be altered to suit individual needs.

## Production of mobile phones

Production is a process that calls for cost effectiveness. The CMU200 concept is optimized for IEC/IEEE-bus speed, measurement accuracy and reproducibility as well as cost of ownership. Thanks to the multitasking feature and parallel measurements, previously unobtainable test times can be achieved.

The ability to process BER data and perform transmitter measurements at the same time, allows phase / frequency error, power versus time and average power (PCL accuracy) to be measured during the time-consuming receiver test.

The accuracy and reproducibility ensure correct and steady measurement results and thus contribute to the quality and reliability of the end product.

## GSM evolution – 2.5G

The amount of data traffic in GSM networks is growing rapidly. Multislot applications such as HSCSD or GPRS together with the innovative 8PSK modulation scheme EDGE are needed to cater for the increase in data traffic. The CMU200 platform is not only able to handle today's standards and systems but is also designed for the needs of tomorrow.

## Multislot

In the future, mobile phones will be able to use several timeslots simultaneously for data transmission and reception to further increase the data rate. The simultaneous transmission and reception of several timeslots (multislot) is the technological






challenge for circuit-switched and packet-switched applications. The following extensions of the GSM single-slot measurements enable maximum flexibility in development, and, due to minimum measurement times, maximum throughput in production.

- ◆ Individual levels for all timeslots used in the downlink (DL). The CMU generates up to eight timeslots per frame in the downlink; each timeslot can be assigned a separate level. The excellent level stability of the CMU200 generator is not impaired by multislot transmission using different levels, and allows the most accurate receiver sensitivity measurements (BER/DBLER).
- ◆ Transmitter and receiver measurements are possible on every timeslot used. The new multislot concept allows independent measurements on any timeslot (TS 0 to 7) and thus covers the current and future multislot combinations without restrictions.


- ◆ Power-versus-time measurement (graphical display) for up to four timeslots in the uplink (UL). The templates of this application are evaluated independently for each timeslot – in line with standards and according to recommendations. Both GMSK- and 8PSK-modulated signals are recognized, and the templates of the relevant timeslot are set in realtime.

Multislot measurements are required for HSCSD and ECSD technologies as well as for GPRS and EGPRS.


*GSM-specific non-signalling test provides generation and analysis of RF signals for testing RX/TX modules or mobiles in service mode*

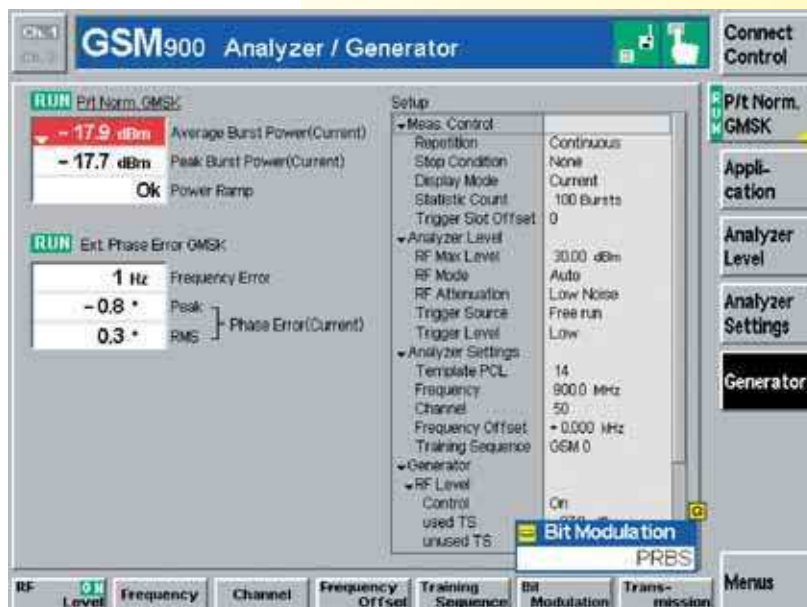

*The overview menu provides fast comprehensive information on the mobile's RF performance; the hotkeys at the bottom of the screen give immediate access to specific and detailed GSM measurements*

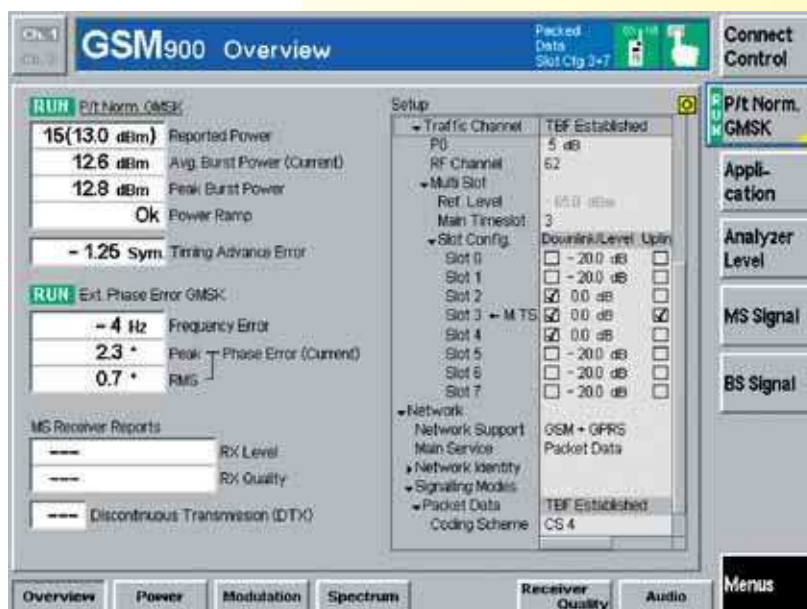

*In the GSM non-signalling function groups the possibility of switching between GMSK and 8PSK (EDGE) is already implemented so that EDGE bursts as shown here can easily be analyzed*

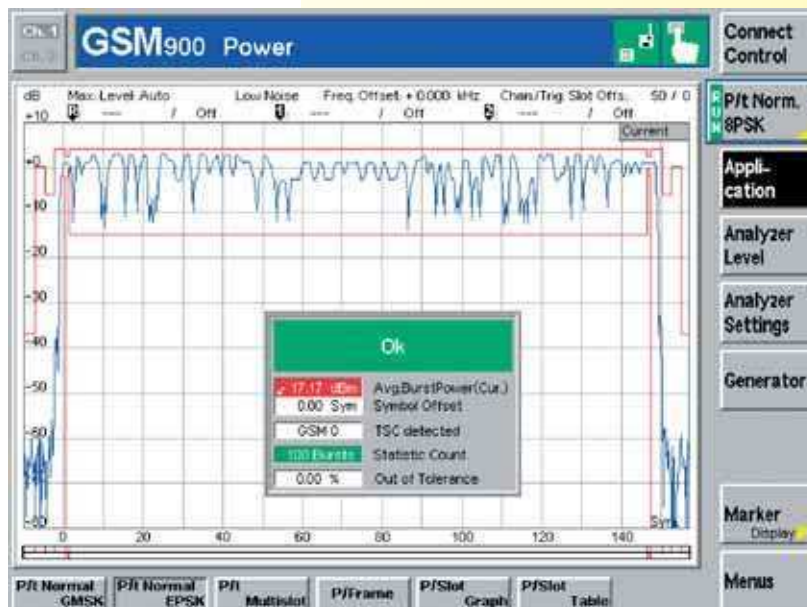


## 8PSK modulation – EDGE

Besides multislot, 8PSK is a further step towards increasing the mobile radio data rate. By using the available GSM frame structure, the gross data rate is three times that obtained with GMSK. The CMU 200 can already perform 8PSK on GSM bursts and analyze them thanks to advanced measurement applications. Error vector magnitude and magnitude error have been added to the range of modulation measurements. New templates for power-versus-time measurements ensure compliance with the specifications, as do the modified tolerances for spectrum measurements. 8PSK will transform HSCSD technologies into ECSD and GPRS into EGPRS. As with all measurements provided by the CMU 200, special attention has been given to achieving maximum measurement accuracy and speed for EDGE too.

## GPRS/EGPRS

Thanks to the new, future-oriented method of packet data transmission, the radio resources of existing GSM mobile radio networks can be utilized efficiently for data services. As with circuit-switched services, GPRS will also use a combina-

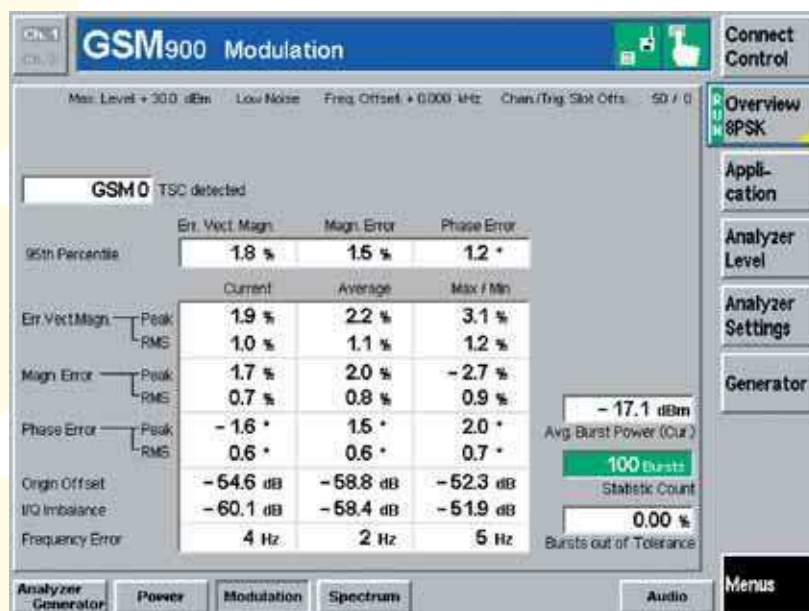

*In the 8PSK mode the modulation analysis is subdivided. The error vector magnitude, the magnitude error and the phase error can be displayed both numerically as shown above, or graphically.*

tion of several timeslots (multislots) and higher-level modulation in the form of 8PSK (EGPRS) to push up the data rate. The introduction of packet-oriented transmission and the associated temporary assignment of radio resources require new test concepts. The CMU 200 provides the following test modes:

◆ ETSI Test Mode A: In this mode, the mobile is induced to continuously transmit the associated UL timeslots. The CMU 200 can carry out all TX measurements available, such as the

power ramp measurement of up to four adjacent timeslots simultaneously, or modulation and spectrum measurements.

◆ ETSI Test Mode B: This mode creates a loopback in the telephone so that the mobile retransmits data blocks received from the CMU 200. In addition to the measurements available in the ETSI test mode A, test mode B enables bit and block error rate measurements (BER/DBLER).

## GSM specifications – Mobile station test

### RF generator

<b>Modulation</b>	GMSK, BxT = 0.3 8PSK
<b>Frequency range</b>	GSM 400 band 460 MHz to 468 MHz / 488 MHz to 496 MHz GSM850 band 869 MHz to 894 MHz GSM900 band 921 MHz to 960 MHz GSM1800 band 1805 MHz to 1880 MHz GSM1900 band 1930 MHz to 1990 MHz
<b>Attenuation of inband spurious emissions</b>	>50 dB
<b>Inherent phase error (GMSK)</b>	<1°, rms <4°, peak
<b>Inherent EVM (8PSK)</b>	<2%, rms
<b>Frequency settling time</b>	<500 µs to res. phase of 4°
<b>Output level range (GMSK)</b>	RF1 -130 dBm to -27 dBm RF2 -130 dBm to -10 dBm RF3OUT -90 dBm to +13 dBm

### Output level range (8PSK)

RF1	-130 dBm to -31 dBm
RF2	-130 dBm to -14 dBm
RF3OUT	-90 dBm to +9 dBm

### Output level resolution

0.1 dB

### Output level uncertainty

	+23°C to +35°C	+5°C to +45°C
RF1, RF2	<0.5 dB	<0.7 dB
>-117 dBm		
RF3OUT	<0.7 dB	<0.9 dB
-90 dBm to +10 dBm (GMSK)		
-90 dBm to +6 dBm (8PSK)		


### RF analyzer

#### Frequency range

GSM 400 band	450 MHz to 458 MHz / 478 MHz to 486 MHz
GSM850 band	824 MHz to 849 MHz
GSM900 band	876 MHz to 915 MHz
GSM1800 band	1710 MHz to 1785 MHz
GSM1900 band	1850 MHz to 1910 MHz

#### Measurement bandwidth

in measurement menus	500 kHz
----------------------	---------

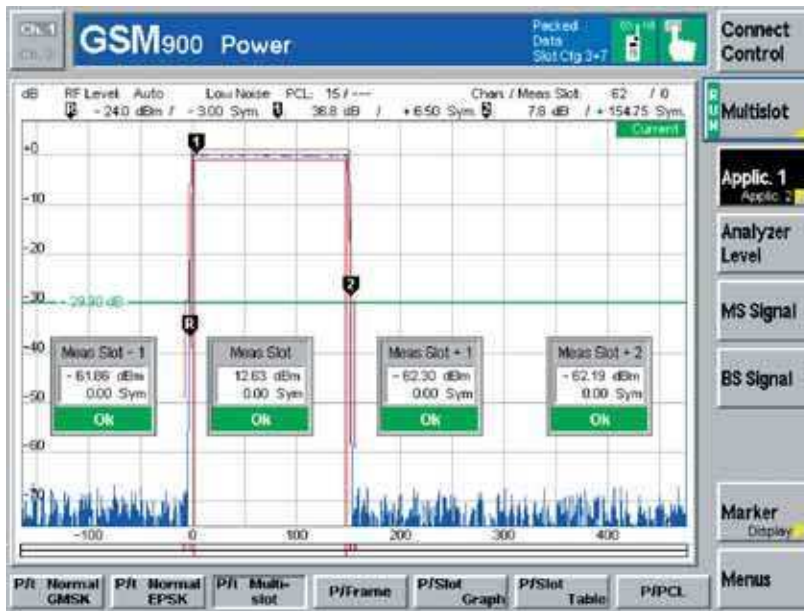

*The power-versus-time multislot application can graphically display up to 4 adjacent timeslots, automatically detects GMSK- and 8PSK-modulated signals and activates the associated templates in real-time. A new zoom function allows full-screen display of each slot.*

## Reduced signalling synchronized mode (GPRS)

Extremely fast adjustment and testing of RF parameters during GPRS mobile phone production is ensured by deactivating the GPRS protocol stack. Without using the higher protocol layer (RLC/MAC layer), the CMU 200 synchronizes the mobile (camping), and the data channel (PDCH) is then set up directly.

The GPRS and EGPRS data coders are already available to determine bit error rates (BER) and data block error rates (DBLER).

### Power meter (frequency-selective)

#### Level range

RF1	Continuous power <sup>1)</sup>	-40 dBm to +47 dBm (50 W)
	Peak envelope power <sup>2)</sup> (PEP)	+53 dBm (200 W)
RF2	Continuous power	-54 dBm to +33 dBm (2 W)
	Peak envelope power <sup>2)</sup> (PEP)	+39 dBm (8 W)
RF4IN (continuous power and PEP)		-80 dBm to 0 dBm

#### Level uncertainty

	+23°C to +35°C	+5°C to +45°C
RF1, RF2, RF4IN	<0.5 dB	<0.7 dB

#### Level resolution

0.1 dB (0.01 dB via remote control)

### Modulation analysis

#### Level range (PEP)

RF1 <sup>2)</sup>	-6 dBm to +53 dBm
RF2 <sup>2)</sup>	-20 dBm to +39 dBm
RF4IN	-60 dBm to 0 dBm

#### Inherent phase error (GMSK)

<0.6°, rms  
<2°, peak

#### Inherent EVM (8PSK)

<1.0 %, rms

#### Frequency measurement uncertainty

±10 Hz + drift of time base

### Burst power measurement

#### Reference level for full dynamic range (GMSK, low noise mode)

RF1 <sup>2)</sup>	+10 dBm to +53 dBm
RF2 <sup>2)</sup>	-4 dBm to +39 dBm
RF4IN	-22 dBm to 0 dBm
Dynamic range (GMSK)	>72 dB (BW=500 kHz, rms)

#### Reference level for full dynamic range (8PSK, low noise mode)

RF1 <sup>2)</sup>	+6 dBm to +49 dBm
RF2 <sup>2)</sup>	-8 dBm to +35 dBm
RF4IN	-26 dBm to -4 dBm
Dynamic range	>69 dB (BW = 500 kHz, rms)

#### Relative measurement uncertainty

Result > -40 dB  
-60 dB ≤ result ≤ -40 dB

<0.1 dB  
<0.5 dB

#### Resolution

0.1 dB in active part of burst

<sup>1)</sup> 50 W from +5 °C to +30 °C, linear degradation down to 25 W at 45 °C.

<sup>2)</sup> Mean value of power versus time must be equal or less than allowed continuous power.

## GSM highlights of CMU200

### Benchmark-breaking IEEE-bus speed due to

- ◆ Parallel measurements
- ◆ Secondary addressing
- ◆ Optimized processing power

### High flexibility for R&D

- ◆ Assignment on up to 8 DL slots (TS 0 to 7)
- ◆ TX/RX on any transmit slot
- ◆ Individual level generation on any DL slot used

### GMSK/8PSK measurements

- ◆ Phase/frequency error, EVM, magnitude error, origin offset, I/Q imbalance for I/Q modulator tuning
- ◆ Power versus time
- ◆ On up to 4 UL slots
- ◆ Normal/access
- ◆ Peak power/average, power versus frame, power versus slot
- ◆ General spectrum measurements
- ◆ Timing error
- ◆ BER/DBLER, RBER/FER, FastBER
- ◆ Power versus PCL (on 3 or 7 channels)



# TDMA in CMU200

The need for higher data rates is the trend in our information-oriented society in the new millennium. The enhancement of mobile phones takes this need into account on the way to the next generation of wireless communication. Need to test these future improvements?

The CMU200 does it all. The TDMA section takes care of your requirements to cope with this fast progressing mobile technology. The CMU200 concept with its multistandard platform architecture provides for further extensions such as *Bluetooth* and *cdma2000*.

## TDMA

The wide acceptance of TDMA (IS-136) is based on its very flexible and powerful technology as well as on its compatibility with AMPS, which is widespread and one of the major wireless communication standards. Derived from analog AMPS, the TDMA standard is now ready for a step-by-step evolution into the third generation of mobile radio technology. This fact shows the need for a test instrument that is flexible enough to cover all future needs as well as the current standards.

For TDMA (IS-136) signalling functionality, the CMU200 requires the versatile signalling unit (CMU-B21) as well as the software option CMU-K27 for the cellular band or CMU-K28 for the PCS band.

Due to the highly user-friendly menu concept, the CMU200 provides quick access to all measurements desired, optimizing handling and consequently efficiency.

## Signalling mode

The CMU200 simulates a TDMA base-station RF interface including the signalling protocol so that a mobile can be tested with regard to different signalling parameters. All necessary network and base-station parameters can be set, such as control and traffic channel configuration, neighbouring channels setup etc. You can also generate a MAHO report.

## Non-signalling mode

The non-signalling mode is for generating and analyzing TDMA (IS-136) signals in the frequency range from 10 MHz to 2.7 GHz. The CMU200 provides TDMA-specific measurements such as:

- ◆ Power
- ◆ Modulation
- ◆ Spectrum
- ◆ Power versus time
- ◆ BER

## TDMA (IS-136) development

With its great versatility the CMU 200 is the most suitable tool for the development of mobile phones. Four configurable RF connectors are provided to enable flexible signal generation and analysis. The power meter can evaluate signals in a range from -80 dBm to +47 dBm, whereas the generator outputs signals from -130 dBm to +13 dBm. The clearly structured and user-friendly menu design together with the clear-cut screen layout provides quick access to all features and ensures trouble-free monitoring of the device under test.

## Quality assurance

Due to its high measurement repeatability and accuracy, the CMU200 is the right choice to ensure a consistently high quality standard in production. TDMA-specific measurements such as BER, error vector magnitude (EVM) and EVM10, where only the first 10 symbols are taken into account, provide an excellent test platform to guarantee the production of high-quality devices.

## Production of mobile phones

The production of mobile phones requires time-efficient and cost-effective means that ensure both high throughput and state-of-the-art accuracy. Thanks to the unique IEC/IEEE-bus concept of the CMU200, these two goals can be easily achieved in your production line. The intelligent handling of the GPIB commands received optimizes the measurement speed for all TDMA-specific measurements. In practice, this will mean dramatically enhanced test time and test yield.

## Acoustic measurements

The newly implemented ACELP speech coder is able to encode and decode real audio signals and allows you to use the CMU200 also in real acoustic measurement applications. Equivalent to the GSM implementation of the CMU200 the TDMA speech coder provides analog inputs and outputs and a connector for an external handset. The speech coder requires the hardware option CMU-B52 and can also be combined with the internal Audio Analyzer/Generator CMU-B41.


The mobile reports the received signal strength (RSSI) of the observed channels back to the CMU where the RSSI is displayed in the MAHO report list. It is possible to configure the neighbouring channels in the network setup. The reported BER can also be monitored.



The modulation menu allows the phase error, frequency error and the error vector magnitude to be measured. The measurement results are displayed graphically. Additional measurements such as amplitude droop and timing error are taken as well and displayed numerically in the same screen.



In the power menu, the mobile output power of the short burst or the normal burst is displayed. The CMU200 also enables leakage power measurements which indicate the mobile power output in time slots not used.

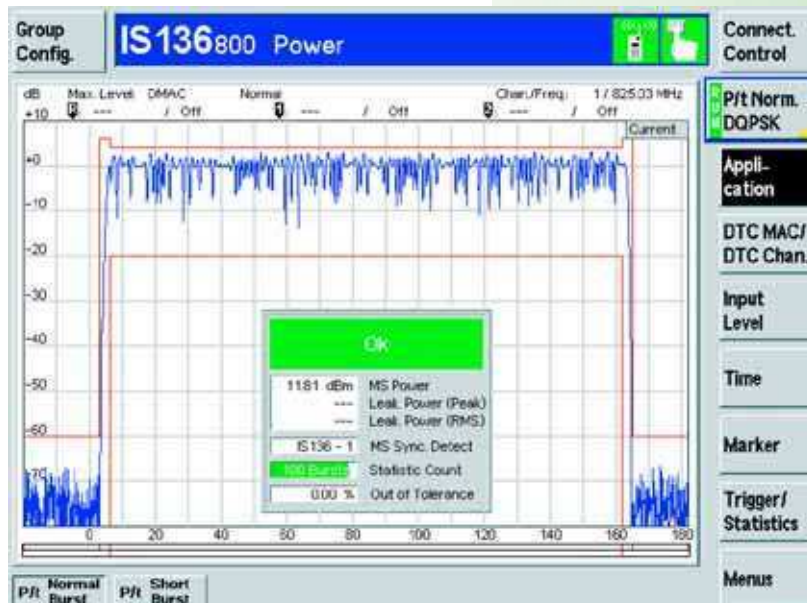

# TDMA in CMU200

## Handoffs

Handoffs are part of the IS-136 specification. Handoffs between PCS and cellular bands as well as from and to AMPS are defined and have to be tested. The CMU200 supports handoffs from IS-136 800 MHz to 1900 MHz (inter-band hand-off) and vice versa. Handoffs from 1900 MHz or 800 MHz to AMPS and vice versa are also possible (inter-mode handoff) with the CMU200.

## Switching standards

The flexibility of the CMU200 makes for quick and simple switching between two different standards. This is very important for IS-136, which is a dual-mode standard containing a digital (TDMA) and an analog mode (AMPS). The handoff between TDMA and AMPS can be achieved by simply pressing a button. This results in a very versatile test concept to improve the flexibility and throughput of your production line.



*In the modulation overview menu, error vector magnitude (EVM), phase error and magnitude error are measured simultaneously and displayed in a numerical table. It is possible to choose either EVM, where the whole burst is considered, or EVM10, where only the first ten symbols are taken into account.*

## TDMA specifications – Mobile station test

### RF generator

<b>Frequency range signalling mode</b>	
US Cellular	869 MHz to 894 MHz
PCS (US)	1930 MHz to 1990 MHz
<b>Frequency range non-signalling mode</b>	
Frequency resolution	10 MHz to 2200 MHz
	1 Hz
<b>Frequency uncertainty</b>	
	same as time base
<b>Output level range</b>	
RF1	-130 dBm to -32 dBm
RF2	-130 dBm to -15 dBm
RF3OUT	-90 dBm to +8 dBm
<b>Output level resolution</b>	
	0.1 dB
<b>Output level uncertainty</b>	
	see CMU200 base unit

### Modulation

$\pi/4$  DQPSK or unmodulated (non-signalling mode)  
 Uncertainty <2.5% (EVM rms)  
 Carrier suppression >40 dB

### RF analyzer

<b>Frequency range signalling mode</b>	
US Cellular	824 MHz to 849 MHz
PCS (US)	1850 MHz to 1910 MHz
<b>Frequency range non-signalling mode</b>	
Frequency resolution	10 MHz to 2200 MHz
	1 Hz
<b>Frequency uncertainty</b>	
	same as time base
<b>Modulation analyzer</b>	
824 MHz to 849 MHz and 1850 MHz to 1910 MHz	
EVM, rms (residual)	<2%
EVM, peak (residual)	<4%
I/Q offset (residual)	<-50 dB (0.3%)
I/Q imbalance (residual)	<-50 dB (0.3%)
Frequency measurement range	-2 kHz to +2 kHz
Frequency measurement error	≤5 Hz + drift of time base



### Basic features

- ◆ Call to / from mobile
- ◆ Handoff to AMPS
- ◆ Dual-band handoff

### Signalling measurements

- ◆ MAHO report
- ◆ Power versus time
  - Short burst
  - Normal burst
- ◆ Modulation
  - Phase error
  - Magnitude error
  - EVM/EVM10
  - Overview of phase / magnitude and EVM simultaneously
- ◆ Spectrum
  - Adjacent channel power due to switching/due to modulation
- ◆ Overview
  - Signalling information

### Non-signalling measurements

- ◆ Modulation
- ◆ Spectrum
- ◆ Power versus time
- ◆ BER



*Handoffs from cellular band (800 MHz) to PCS band (1900 MHz) can be tested as well as to and from AMPS. Before handing off to a new network the parameters for the target network can be set. This results in a large variety of different test scenarios.*

### Power meter (frequency-selective)

**Level uncertainty** see CMU200 base unit

### Power versus time measurement

#### Reference level for full dynamic range (low noise mode)

RF1	+4 dBm to +47 dBm
RF2	−10 dBm to +33 dBm
RF4IN	−28 dBm to −6 dBm
Dynamic range	>74 dB (BW=100 kHz, rms)

#### Relative measurement uncertainty

Result >−40 dB	<0.1 dB
−60 dB ≤ result ≤ −40 dB	<0.5 dB

**Residual leakage power level** <−65 dBm

#### Adjacent channel power measurement

Dynamic range	
1st adjacent channel	>45 dB
2nd and 3rd adjacent channel	>55 dB

# AMPS in CMU200

## AMPS overview

Analog AMPS (advanced mobile phone system) is a standard system for analog cellular telephone service in the United States and is also used in other countries. It is based on the frequency spectrum allocation for cellular service by the Federal Communications Commission (FCC) in 1970. Introduced by AT&T in 1983, AMPS became the most widely deployed cellular system in the United States.

## AMPS options

Although AMPS is a 1st generation analog standard, a great demand for mobile radio testers covering this standard will continue to exist in the future. Especially in the United States, dual-mode cdmaOne/AMPS and TDMA/AMPS phones are very common. By combining the digital standards with analog AMPS, the network operators offer their customers the advantages of the digital standards and ensure nearly 100% coverage in North America. As a consequence, Rohde & Schwarz is extending the range of the CMU200 options by introducing analog AMPS in addition to the digital standards TDMA, cdmaOne and CDMA2000. These options add analog AMPS functionality to the CMU200 base unit:

- ◆ CMU-B21 (versatile link handler)
- ◆ CMU-B41 (audio generator/analyzer)
- ◆ CMU-K29 (AMPS test software)

The hardware options CMU-B21 (versatile link handler) and CMU-B41 (audio generator/analyzer) are suited for other standards as well.

## AMPS measurements and features

As for other standards, there are two categories of AMPS measurements:

- ◆ Transmitter tests for verifying the transmit part of a mobile
- ◆ Receiver tests for verifying the receive part of a mobile
- ◆ AF level search routine
- ◆ Sensitivity search routine

The AF level search routine in the TX test menu allows the user to set the desired frequency deviation of the mobile transmitter at a keystroke, the level of the CMU200 modulation generator being automatically corrected.

The Sensitivity search routine in the RX test menu automatically searches the receiver input level at which a selectable SINAD of the demodulated signal can still be attained. The following list provides an overview of the most important tests implemented in the CMU-K29 option.

## Transmitter measurements

- ◆ Carrier power
- ◆ Carrier frequency error
- ◆ SAT frequency error/peak deviation
- ◆ ST frequency error/peak deviation
- ◆ Modulation noise and distortion
- ◆ Hum and noise
- ◆ Electrical audio frequency response
- ◆ Modulation distortion
- ◆ Residual AM


## Receiver measurements

- ◆ Sensitivity
- ◆ Hum and noise
- ◆ SINAD
- ◆ Distortion
- ◆ AF voltage
- ◆ Electrical audio frequency response
- ◆ Residual AM
- ◆ Audio deviation

## AMPS specifications – Mobile station test

### RF generator

<b>Frequency range signalling mode</b> US Cellular	869 MHz to 894 MHz
<b>Frequency range non-signalling mode</b> Frequency resolution	10 MHz to 2200 MHz 1 Hz
<b>Frequency uncertainty</b>	same as time base
<b>Output level range</b> RF1 RF2 RF3OUT	–130 dBm to –27 dBm –130 dBm to –10 dBm –90 dBm to +13 dBm
<b>Output level resolution</b>	0.1 dB
<b>Output level uncertainty</b>	see CMU200 base unit (add 0.1 dB)
<b>Modulation</b> FM deviation range FM resolution AF range	100 Hz to 20 kHz 1 Hz 100 Hz to 15.999 kHz

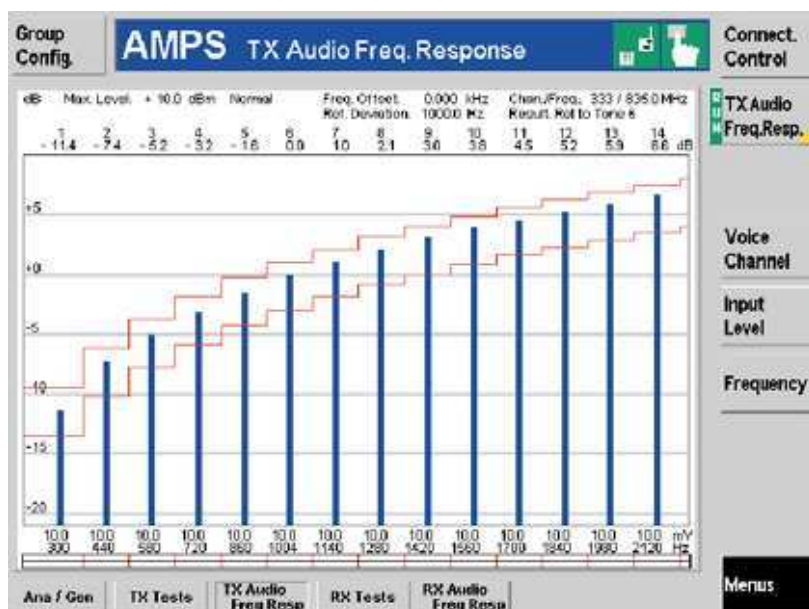

*TX audio frequency response measurement: the pre-emphasis characteristic of the mobile transmitter is verified by a single-shot measurement*

All the filters required for the measurements are of course preconfigured in line with specifications, but their settings can be modified for individual measurements. The RX and TX electrical audio frequency response measurements in AMPS are usually defined as frequency sweep versus AF frequency range. The CMU 200 offers a

much faster and more modern alternative. Using the TX and RX audio frequency response menus of the CMU 200, the AF frequency response is measured simultaneously at 20 test points with user-programmable level and frequency and then checked against specified tolerances (see screenshot above).

FM distortion (SINAD; dev. 8 kHz, AF 1 kHz, BW 30 Hz to 15 kHz)	≥40 dB
Residual FM (rms, BW 300 Hz to 3 kHz)	≤10 Hz
Deviation uncertainty at 1 kHz AF, 8 kHz dev.(measurement bandwidth 30 Hz to 15 kHz)	<2 % of setting + residual FM
Deviation frequency response at 300 Hz to 15.999 kHz AF	≤1 dB

## RF analyzer

<b>Frequency range signalling mode</b>	
US Cellular	824 MHz to 849 MHz

<b>Frequency range non-signalling mode</b>	
Frequency resolution	10 MHz to 2200 MHz 1 Hz

<b>Frequency uncertainty</b>	same as time base
------------------------------	-------------------

## Power meter (frequency-selective)

<b>Reference level range</b>	
RF1	0 dBm to +53 dBm
RF2	-14 dBm to +39 dBm
RF4IN	-37 dBm to 0 dBm

<b>Level uncertainty</b>	see CMU200 base unit
<b>Level resolution</b>	0.1 dB

## FM measurement

Dynamic range	30 dB below reference level
RF bandwidth (2 x deviation + 4 x AF)	136 kHz
Deviation range	0 kHz to 47 kHz
Resolution	1 Hz
AF range	100 Hz to 18 kHz
Residual FM	
BW 300 Hz to 3 kHz, rms	≤5 Hz
BW 6 Hz to 20 kHz, rms	≤18 Hz
Uncertainty (BW 6 Hz to 20 kHz)	<1% of reading + residual FM
Carrier frequency error measurement range	-47 kHz to +47 kHz
Carrier frequency error measurement uncertainty	≤2 kHz + drift of time base

## AF generator

see CMU200 base unit (Audio Analyzer/Generator CMU-B41)

## AF analyzer

see CMU200 base unit (Audio Analyzer/Generator CMU-B41)

## AMPS highlights of CMU200

### Benefits of base unit

- ◆ Platform supporting cdmaOne, CDMA2000, TDMA and AMPS within one box
- ◆ Wide frequency range allowing dual mode/dual band testing required for cdmaOne, CDMA2000 and TDMA
- ◆ See base unit section

### AMPS features

- ◆ Powerful signalling capabilities
- ◆ Base station simulation
- ◆ Mobile or base station originated call connect/disconnect
- ◆ Short measurement time ensuring high throughput
- ◆ Combined measurements
- ◆ Benchmark-breaking IEEE-bus speed (see GSM highlights)
- ◆ Simple interactive operation, standardized MMI
- ◆ No specialized network knowledge required
- ◆ Various handoffs from cdmaOne, CDMA2000/TDMA and to TDMA supported



# cdmaOne in CMU200

## CDMA overview

Code division multiple access (CDMA) – once a radically new concept in wireless communication – has meanwhile become a well established standard in the world of mobile communication. CDMA has proven its advantages and capabilities and has gained widespread international acceptance.

Instead of using frequencies or timeslots as traditional technologies like TDMA and AMPS do, CDMA uses mathematical codes to transmit and distinguish between multiple wireless conversations. Depending on the level of mobility, CDMA provides 8 to 10 times the capacity of AMPS and 4 to 5 times the capacity of TDMA systems. CDMA can efficiently utilize the spectrum and serve many subscribers without requiring extensive frequency planning.

## History

Since the startup of the first commercial CDMA network in Hong Kong in September 1995, CDMA has established itself as a worldwide mobile radio standard. It has not only been successful in its country of origin, the USA, as well as in Korea and Japan, but all over the world. With its still booming growth rates CDMA today is – besides GSM – one of the most important digital 2nd generation mobile radio standards. CDMA is therefore also suited as the leading-edge technology on the way to 3rd generation mobile radio.

## cdmaOne options

Taking the current development on the market into account, Rohde & Schwarz has extended the proven modular concept of the CMU200 with cdmaOne functionality. The following options make the CMU200 a compact radio communication tester for all TIA/EIA-95-based cdmaOne mobile phones:

- ◆ CMU-B81 (cdmaOne signalling unit)
- ◆ CMU-K81 (cdmaOne test software for cellular band)
- ◆ CMU-K82 (cdmaOne test software for PCS band)

The CMU200 is also the first choice as a tester for cdmaOne – especially in harsh production environments – because of its outstanding measurement speed, ultra-high accuracy and unrivalled reliability which is also a result of the innovative ventilation concept. Thanks to the modular concept of the CMU200, cdmaOne functionality plus GSM, TDMA (TIA/EIA-136), AMPS and other standards such as *Bluetooth* can be implemented in a single unit. Which other radio communication tester can boast such superior features?

## cdmaOne functionality

In cdmaOne mode, the tests are based on the TIA/EIA-95A, TSB-74, and J-STD-008 cdmaOne airlink standards. In addition, the cdmaOne option supports also the standards ARIB-T53 and Korean PCS. The tester emulates a code division multiple access base station, makes a call to the mobile, and tests all essential parameters of a cdmaOne mobile station. The tester can measure the following key parameters among other tests:


- ◆ Power measurements:
  - Open-loop time response
  - Gated output power
  - Minimum output power
  - Maximum output power
  - Sideband suppression
- ◆ Receiver quality measurements:
  - Frame error rate (FER)
  - Built-in AWGN generator for simulating environmental noise
  - Predefined configurations for sensitivity and dynamic range
- ◆ Transmitter quality measurements:
  - Waveform quality
  - Error vector magnitude
  - Phase error
  - Magnitude error
  - Carrier feedthrough and I/Q imbalance
  - Frequency accuracy
- ◆ Handoffs:
  - RF channel
  - CDMA interband
  - Handoff to AMPS
  - PN offset
  - Frame offset
- ◆ Non-signalling measurements:
  - Power
  - Waveform quality
  - Frequency error
  - Carrier feedthrough
  - I/Q imbalance

All measurements are implemented according to test specification IS-98C. Parameters and limits are predefined to meet the IS-98C test requirements. This allows easy pass/fail decisions without the need of reconfiguring the test setup.

Graphical representation of transmitter measurements such as open-loop time response, gated output power and modulation are helpful tools especially in R&D environments.


### Open-loop time response

The open-loop power control test shows the response of the mobile station to an increase or decrease in base-station total power. The default increase or decrease for this test is 20 dB. Power stepping and cdmaOne levels are user-definable.

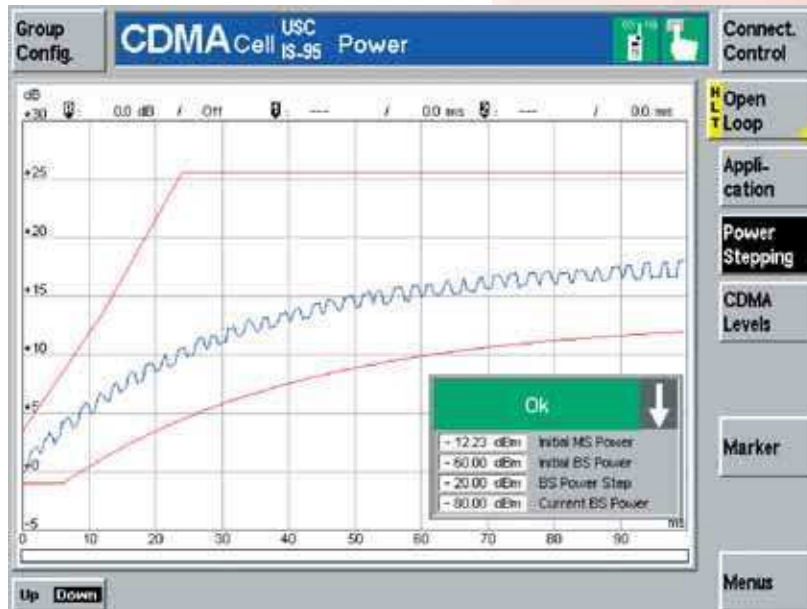


### Gated output power

The gated output power can be displayed in several formats. Select FULL DISPLAY to show the total period of the IS-98 gated output template. The period of the full display is approx. 1500  $\mu$ s. Select RISING EDGE or FALLING EDGE to zoom in to display the 17 ms period of the rising or falling edge of the waveform. In each of these displays, a MARKER can be activated to display both power amplitude and relative time.

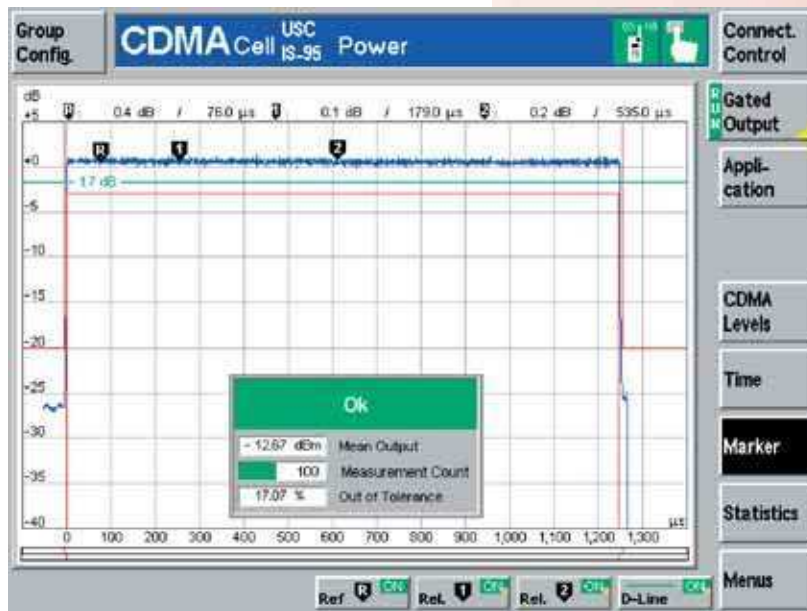

### Modulation measurements: magnitude error


Modulation measurements serve for assessing the quality of the mobile's transmit part. In addition to phase error, error vector magnitude and magnitude error can be shown graphically at the push of a button. A clearly arranged table lists carrier feedthrough, I/Q imbalance, frequency error and waveform quality with current measurement results, average and minimum/maximum values.

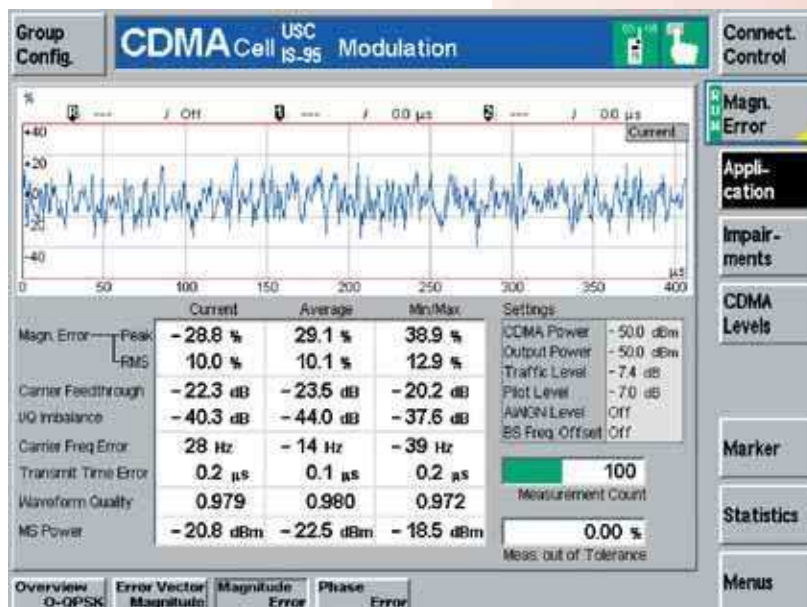

# cdmaOne in CMU200

## CDMA know-how

Rohde&Schwarz is not a newcomer in the field of CDMA, but has many years of experience. As early as 1996, Rohde & Schwarz and Tektronix launched a professional radio tester for cdmaOne mobiles. This extremely successful tester was sold thousands of times worldwide and has undergone permanent enhancement and adaptation to remain state-of-the-art. The CMU200 builds on this success and is able to perform cdmaOne mobile station tests using thoroughly proven test and measurement methods, and also offers the possibility of enhancement for future technologies.

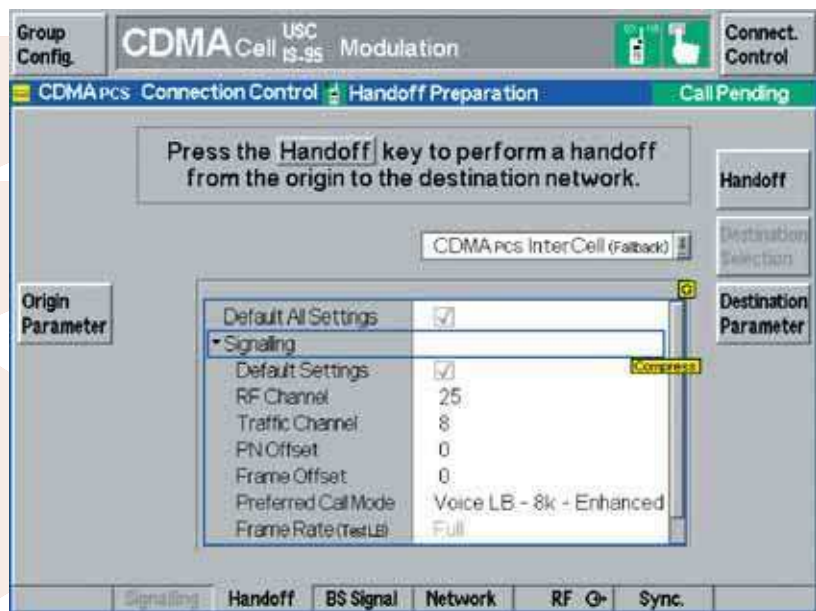

*The CMU200 offers a separate menu for handoffs. In addition to handoff targets such as operating status or network to which the CMU200 is to switch, the required target parameters, e.g. channel number etc. can be configured. This enables handoff to AMPS as well as handoff to and from the voice loopback mode.*



## cdmaOne specifications – Mobile station test

<b>Standards</b>	
cdmaOne standards	TIA/EIA-95, J-STD-008, ARIB T53, Korean, Chinese
cdmaOne test standards	TIA/EIA-98, J-STD-018
<b>RF generator</b>	
<b>Frequency range</b>	
Option CMU-K81	
US Cellular	869 MHz to 894 MHz
China Cellular	934 MHz to 969 MHz
Japan Cellular	832 MHz to 870 MHz
Option CMU-K82	
PCS (US)	1930 MHz to 1990 MHz
PCS (Korea)	1805 MHz to 1870 MHz
<b>Frequency resolution</b>	channel spacing according to standard
<b>Frequency uncertainty</b>	same as time base
<b>Output level range (modulated signal)</b>	
RF1	-120 dBm to -33 dBm
RF2	-120 dBm to -16 dBm
RF3OUT	-80 dBm to +7 dBm
<b>Output level resolution (modulated signal)</b>	0.1 dB

### Output level uncertainty

	+23°C to +35°C	+5°C to +45°C
RF1, RF2: $\geq -108$ dBm	<0.5 dB	<0.7 dB
RF3OUT: -80 dBm to +4 dBm	<0.7 dB	<0.9 dB

### Modulation

QPSK, multiple QPSK	1.2288 Mcps
AWGN	see AWGN generator
Carrier suppression	>35 dB
Waveform quality factor (p)	>0.985

### AWGN generator

Selectable bandwidth	1.23 MHz or 1.8 MHz
Output level resolution	0.1 dB

### RF analyzer

#### Frequency range

Option CMU-K81	
US Cellular	824 MHz to 849 MHz
China Cellular	889 MHz to 924 MHz
Japan Cellular	887 MHz to 925 MHz

#### Option CMU-K82


PCS (US)	1850 MHz to 1910 MHz
PCS (Korea)	1715 MHz to 1780 MHz

### Measurement filter

according to standard (1.23 MHz bandwidth)



## cdmaOne highlights of CMU200

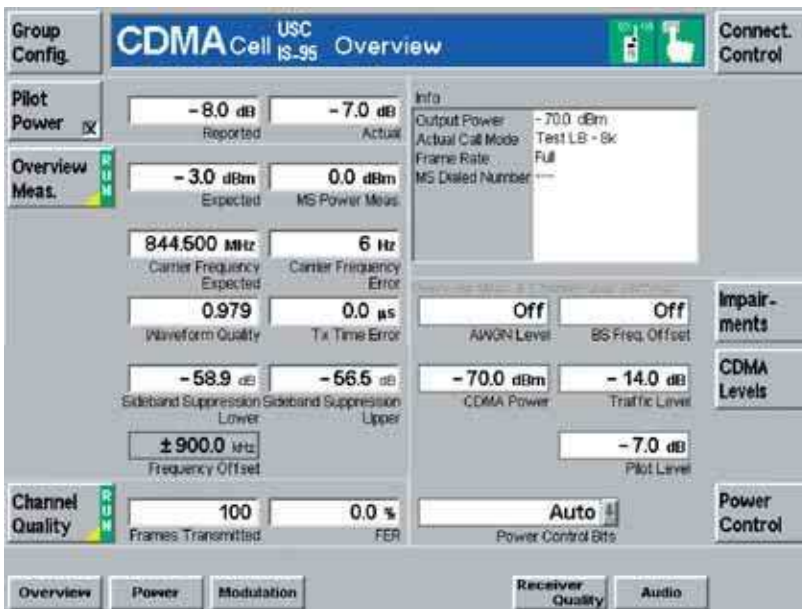

The overview menu shows the most important parameters in a clear form. These include BS settings as well as MS test results such as power, frequency error and waveform quality. The overview menu also gives access to other tests (power control, modulation, receiver quality).

- ◆ Voice loopback and comprehensive testing of mobiles
- ◆ Powerful signalling capabilities
- ◆ Built-in AWGN generator for simulating environmental noise
- ◆ Base station simulation
- ◆ Mobile or base station originated call connect/disconnect
- ◆ Short measurement time ensuring high throughput
- ◆ Combined measurements (RX/TX in parallel)
- ◆ Benchmark-breaking IEEE-bus speed (see GSM highlights)
- ◆ Simple interactive operation, standardized MMI
- ◆ No specialized network knowledge required
- ◆ Various handoffs supported (e.g. cdmaOne to analog AMPS)
- ◆ Dual-band/dual-mode testing
- ◆ Signalling and non-signalling mode
- ◆ Support of GPSOne test application

cdmaOne™

Frequency resolution channel spacing according to standard

### Level range (Q-PSK signal)

RF1	-40 dBm to +47 dBm
RF2	-54 dBm to +33 dBm
RF4IN	-80 dBm to -6 dBm

### Power meter (frequency-selective)

#### Level uncertainty

	+23°C to +35°C	+5°C to +45°C
RF1, RF2, RF4IN	<0.5 dB	<0.7 dB

Level resolution 0.1 dB

### Modulation analyzer

p uncertainty (for p 0.9 to 1)	<0.003
Frequency measurement range	-3 kHz to +3 kHz
Frequency measurement uncertainty	≤30 Hz + drift of timebase
Timing measurement uncertainty	<60 ns

## Supported CDMA standards

Frequency band	Airlink standard
US Cellular (800 MHz)	TIA/EIA-95
Japan Cellular	ARIB-T53/-95
China Cellular	TIA/EIA-95
US PCS (1900 MHz)	ANSI-J-STD008, UB-IS-95
Korea PCS (1800 MHz)	J-STD008, UB-IS-95

# CDMA2000-1X in CMU200

## CDMA2000 overview

CDMA2000 arose from the further development of cdmaOne (TIA/EIA-95) and is an enormous step towards 3G. Besides higher data rates and considerably improved efficiency, CDMA2000 is particularly noteworthy for its downward compatibility to cdmaOne. Nine different configurations (radio configurations RC1 to RC9) in the forward link and six radio configurations in the reverse link define the different connections which are specified in the IS-2000 standard.

- ◆ RC1 and RC2 define cdmaOne connections for rate set 1 and rate set 2
- ◆ RC3 to RC5 in the forward link (or RC3 to RC4 in the reverse link) define CDMA2000 connections for spreading rate 1 (CDMA2000-1X)
- ◆ RC6 to RC9 in the forward link (or RC5 to RC6 in the reverse link) are CDMA2000 connections for spreading rate 3 (CDMA2000-3X) only

Compared to cdmaOne, CDMA2000-1X doubles the capacity for pure voice transmission and provides a maximum packet data rate of 307 kbps on a single 1.25 MHz carrier. CDMA2000-1X is a recognized IMT-2000 3G standard, already successfully established in Korea – and will soon be implemented in Japan, the USA, Canada, Mexico and Brazil. Its application in Eastern Europe is planned as well.

## CMU CDMA2000-1X options:

The CDMA2000 standards have been implemented together with our proven alliance partner Tektronix. By supporting the CDMA2000 standard, Rohde&Schwarz consequently enhances the functionality of the CMU200 multimode platform.

The central component of the CDMA2000-1X option is the Signalling Unit CMU-B83, which is a prerequisite for enabling the CDMA2000-1X functionality in the CMU200. The CMU-B83 is designed for maximum conformity to the standard. The CMU-B83, of course, does not only support pure CDMA2000-1X high-speed data links, but also enables the links of the previous TIA/EIA-95A/B standards.

All tests, which could be performed with the cdmaOne option in conjunction with the CMU-B81, are also available in the new CDMA2000 option. The CMU-U83 option is a cost-efficient upgrade solution from Rohde&Schwarz for customers who have already acquired the cdmaOne option in the CMU200.

CDMA2000-1X is used in diverse frequency ranges. The standard currently defines ten different band classes all of which are supported by the CMU200 with its universal hardware concept.

The following options are available for CDMA2000-1X:

- ◆ CMU-B83: CDMA2000 signalling unit (essential)
- ◆ CMU-U83: cost-efficient hardware upgrade from CMU-B81 to CMU-B83
- ◆ CMU-U65: 3G DDC (additional DSP for the digital board, essential)
- ◆ CMU-K83: CDMA2000-1X software for the 450 MHz band (band class 5)
- ◆ CMU-K84: CDMA2000-1X software for cellular bands
- ◆ CMU-K85: CDMA2000-1X software for PCS bands
- ◆ CMU-K86: CDMA2000-1X software for IMT2000 band (band class 6)

The universal hardware and software concept of the CMU200 represents the optimum solution for the future development and challenges of the CDMA standard over the next few years.

## CDMA2000-1X functionality

The similarities with cdmaOne (same physical conditions and downward compatibility) make the CDMA2000-1X T&M concept very similar to that of cdmaOne. There are, however, major differences in the protocols.

The CMU200 supports connections in all radio configurations defined for CDMA2000-1X, i.e. TIA/EIA-95 connections as well as the usual CDMA2000-1X high-speed connections.

Code domain power is a new and highly important measurement for mobile phones in CDMA2000. Since several code channels are now transmitted simultaneously in the reverse link, it is necessary to check whether the power distribution of the different channels complies with the test specification (TIA/EIA-IS-98-D) for CDMA2000. The measurement concept in the CMU200 is based on ProbeDSP™ technology, which permits high-speed measurement of the code domain power. The emphasis is on fast measurements and clear and concise representation.

Of course, the CMU200 also supports the requirements placed on the gpsOne test application; the CMU200 meets the high demands for frequency and phase accuracy.

The CDMA2000-1X implementation in the CMU200 is based on the TIA/EIA IS-2000 Rev. 0 standard; the measurements comply with the TIA/EIA IS-98-D standard.

The CMU200 currently supports the service options 2, 9, (loopback service options) and 1, 3, 17, 0x8000 (speech service options).


All relevant base station parameters and connection settings can be configured in user-friendly menus.

As with all mobile radio networks supported by the CMU200, two different measurement modes are basically available:


On the one hand, there are tests in the non-signalling mode, which permit an analysis of the mobile without registration in the base station and without actual call setup. For this purpose, the CMU generates a base station signal with all the physical channels required, which are user-configurable. This measurement mode complies in particular with the demands for high measurement speed in production lines.

On the other hand, there are tests with complete signalling.


*The connection menu is the central point for setting up the connection. You can choose between voice loopback and test loopback mode.*

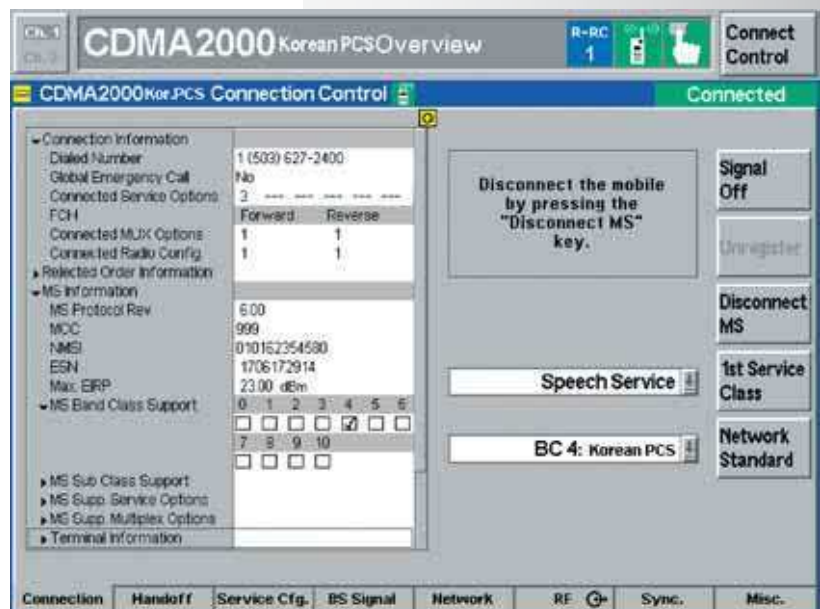

*The service config menu allows the basic channel to be configured for the different service options. Choose RC1/RC2 for TIA/EIA-95 based connections, or RC3, RC4, RC5 for real CDMA2000 calls.*

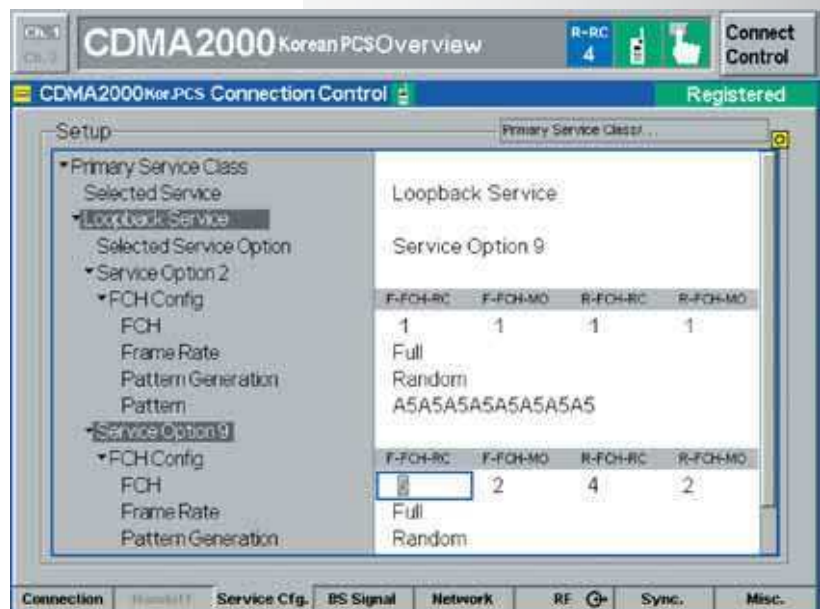

*With the modulation measurement mode you can check the MS transmitter. Parameters like EVM, phase error and frequency error are displayed in graphically.*

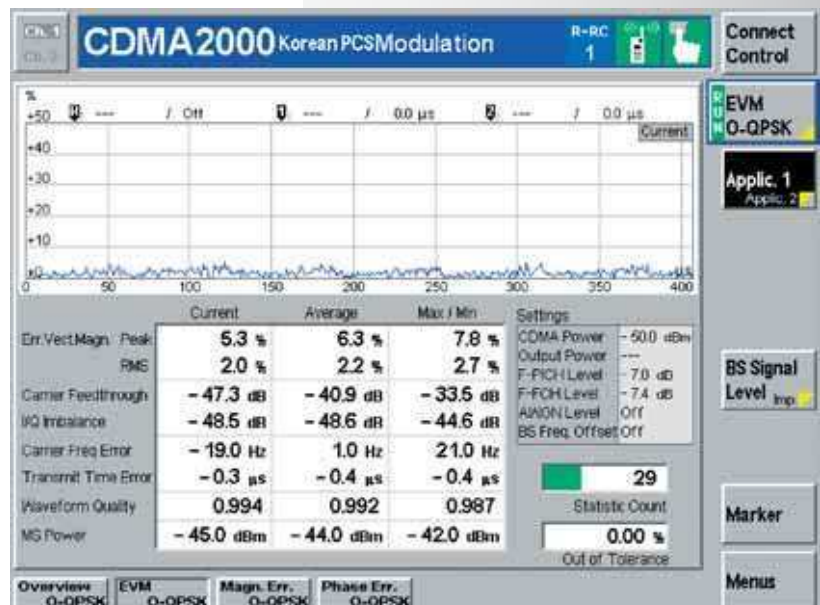




## Signalling mode

The following describes the range of functions in detail:

- ◆ Power measurements
  - Minimum/maximum output power
  - Gated output power
- ◆ Receiver quality measurements
  - Frame error rate (FER)
  - Dynamic range, sensitivity and other user-selectable test environments
- ◆ Modulation (both RC1/2 and RC3/4)
  - Error vector magnitude (EVM), magnitude error, phase error, waveform quality, carrier feedthrough, frequency error
- ◆ Code domain power
  - Code domain power
  - Peak code domain error power, channel power
- ◆ Handoffs
  - Implicit handoffs (RF channel, Walsh code, PN offset, frame offset)
  - Interband handoff
  - Handoff to AMPS
- ◆ Sideband suppression

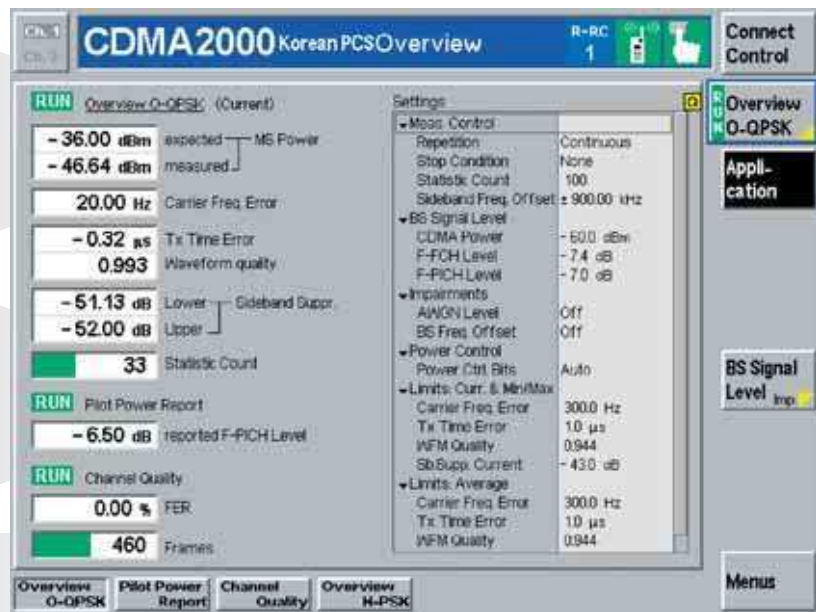

The overview menu displays all relevant TX parameters such as power, frequency error, waveform quality (both for RC1/2 and RC3/4) as well as sideband suppression, reported pilot power and frame error rate (FER)

## Non-signalling mode

- ◆ High-speed power measurement
- ◆ Frequency error
- ◆ Waveform quality (both RC1/2 and RC3/4)
- ◆ Carrier feedthrough
- ◆ Transmit time error
- ◆ Sideband suppression

## CDMA2000 specifications – Mobile station test

### Standards

CDMA2000 standards	TIA/EIA IS-2000 Rev. 0
CDMA2000 test standards	TIA/EIA IS-98-D

### RF generator

#### Frequency range

Option CMU-K83: NMT-450 (band class 5)	421.675 MHz to 494.480 MHz
Option CMU-K84: US/Korean cellular (band class 0)	869.025 MHz to 893.985 MHz
TACS band (band class 2)	917.0125 MHz to 959.9875 MHz
JTACS band (band class 3)	832.0125 MHz to 869.9875 MHz
North American 700 MHz cellular band (band class 7)	746.000 MHz to 764.000 MHz
900 MHz band (band class 9)	925.000 MHz to 958.750 MHz
Secondary 800 MHz band (band class 10)	851.000 MHz to 939.975 MHz
Option CMU-K85: North American PCS (band class 1)	1930 MHz to 1990 MHz
Korean PCS (band class 4)	1840 MHz to 1870 MHz
1800 MHz band (band class 8)	1805.000 MHz to 1879.950 MHz
Option CMU-K86: IMT-2000 (band class 6)	2110.000 MHz to 2169.950 MHz

#### Frequency resolution

channel spacing according to standard

#### Frequency uncertainty

same as time base

#### Output level range (modulated signal)

RF1	–120 dBm to –33 dBm
RF2	–120 dBm to –16 dBm
RF3OUT	–80 dBm to +7 dBm

#### Output level resolution (modulated signal) 0.1 dB

#### Output level uncertainty

	+23°C to +35°C	+5°C to +45°C
RF1, RF2: ≥ –108 dBm	<0.5 dB	<0.7 dB
RF3OUT: –80 dBm to +4 dBm	<0.7 dB	<0.9 dB

#### Modulation

Dual BPSK, multiple QPSK	1.2288 Mcps
AWGN	see AWGN generator
Carrier suppression	>35 dB
Waveform quality factor (p)	>0.985
Code channel level uncertainty (relative to total CDMA power)	
F-PICH, F-PCH, F-FCH, F-SCH1, F-SCH2	0.1 dB typ.
All other channels	0.25 dB typ.
Code channel resolution	0.1 dB


#### AWGN generator

Bandwidth	>1.8 MHz
Output level resolution	0.1 dB
Output level uncertainty	0.2 dB typ. (1.23 MHz bandwidth)
Output level range (relative to total CDMA output power)	–20 dB to +4 dB

#### Supported service options

Loopback service options	SO 2, 9
Speech service options	SO 1, 3, 17, 0x8000

## CDMA2000 Highlights of CMU200

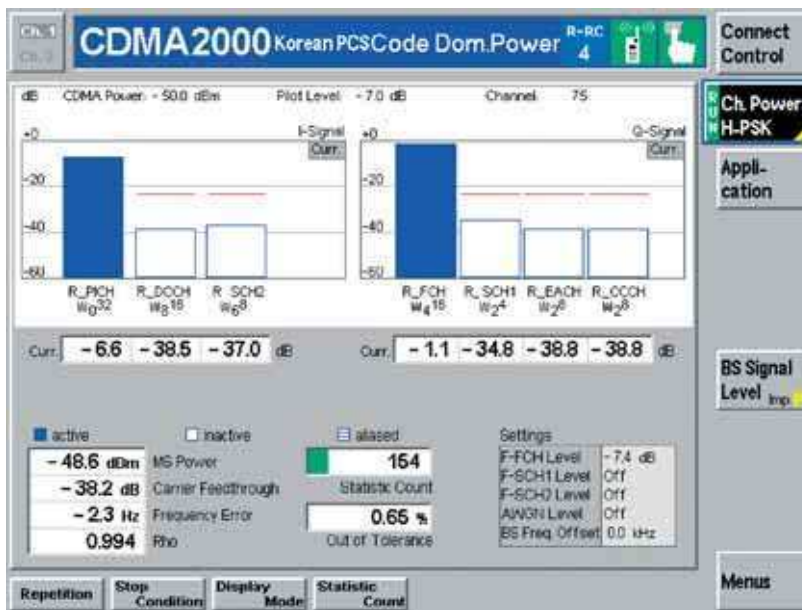

The channel power measurement displays the power in the channels used by the reverse link, separated into I and Q signal

- ◆ Voice loopback and comprehensive testing of mobiles
- ◆ Full support of RC1/RC2 (cdmaOne measurements)
- ◆ Support of all band classes specified in IS-2000
- ◆ Innovative measurement of code domain power, code domain peak error power, channel power
- ◆ Parallel RX/TX measurements ensure high throughput in production environments
- ◆ Graphical representation of measurement results best suited for R&D labs
- ◆ Readout and display of many mobile specific parameters (ESN, slot cycle index, etc.)
- ◆ Extremely fast measurements
- ◆ Non-signalling and signalling mode
- ◆ Various handoffs supported (e.g. handoff to AMPS, interband handoff)

## RF analyzer

### Frequency range

Option CMU-K83:  
NMT-450 (band class 5) 411.675 MHz to 483.480 MHz

Option CMU-K84:  
US/Korean cellular (band class 0) 824.025 MHz to 848.985 MHz  
TACS band (band class 2) 872.0125 MHz to 914.9875 MHz  
JTACS band (band class 3) 887.0125 MHz to 924.9875 MHz  
North American 700 MHz cellular band (band class 7) 776.000 MHz to 794.000 MHz  
900 MHz band (band class 9) 880.000 MHz to 913.750 MHz  
Secondary 800 MHz band (band class 10) 806.000 MHz to 900.975 MHz

Option CMU-K85:  
North American PCS (band class 1) 1850 MHz to 1910 MHz  
Korean PCS (band class 4) 1750 MHz to 1780 MHz  
1800 MHz band (band class 8) 1710.000 MHz to 1784.950 MHz

Option CMU-K86:  
IMT-2000 (band class 6) 1920.000 MHz to 1979.950 MHz

**Measurement filter** according to standard (1.23 MHz bandwidth)

**Frequency resolution** channel spacing according to standard

### Level range (HPSK, O-QPSK signal)

RF1 -40 dBm to +44 dBm  
RF2 -54 dBm to +30 dBm  
RF4IN -80 dBm to -9 dBm

## Power meter (frequency-selective)

### Level uncertainty

RF1, RF2, RF4IN +23°C to +35°C +5°C to +45°C  
<0.5 dB <0.7 dB

**Level resolution** 0.1 dB

## Modulation analyzer

RC1, RC2 (O-QPSK):  
Waveform quality, error vector magnitude, magnitude error, phase error

p uncertainty (for p 0.9 to 1) <0.003  
Frequency measurement range -3 kHz to +3 kHz  
Frequency measurement uncertainty <30 Hz + drift of time base

RC3, RC4 (HPSK):  
Waveform quality, error vector magnitude, magnitude error, phase error, code domain power, peak code domain error power, channel power

p uncertainty (for p 0.9 to 1) <0.003  
Frequency measurement range -3 kHz to +3 kHz  
Frequency measurement uncertainty <10 Hz + drift of time base  
Relative measurement uncertainty result > -33 dB <0.1 dB

# WCDMA in CMU200

The need for higher data rates is the trend in our information-oriented society in the new millennium. The enhancement of mobile phones takes this need into account on the way to the next generation of wireless communication. How to cover these future challenges? Driven by ideas of the first and second generation (SIM, global roaming, military CDMA technology, data services), WCDMA will take all of these fundamentals to unprecedented levels and add new applications and higher data security. Derived from Asian, American and European ideas, 3G is getting ready to be the mobile solution for future needs as well as the current applications.

## WCDMA

Depending on the level of mobility, WCDMA provides several times the capacity of 2nd generation CDMA or TDMA systems.

Thanks to the modular concept of the CMU200, WCDMA functionality plus e.g. GSM, TDMA (TIA/EIA-136), AMPS and other wireless standards such as *Bluetooth* wireless technology, can be implemented in a single unit at the same time.

## WCDMA FDD functionality

The tests are based on the 3GPP/FDD, release 99 WCDMA radio link standards, version June 2001. The CMU200 can easily be upgraded to different functionality steps by means of hardware and software options for non-signalling TX/RX measurements and signalling measurements. All measurements comply with the 3GPP specification TS 34.121. This is especially interesting due to the variety of different filter bandwidths and shapes for ACLR, SEM, MIN power, MAX power, etc that

are to be used according to the specification. Due to the highly user-friendly menu concept, the CMU200 provides quick access to all measurements desired and optimizes handling and consequently efficiency.

## Non-signalling mode

The non-signalling mode is for generating and analyzing WCDMA (3GPP/FDD) signals in the frequency range of the CMU200 base unit. The CMU200 provides WCDMA-specific TX measurements on signals with up to 6 DPDCHs such as

- ◆ ACLR (adjacent channel leakage power ratio): two measurement modes, filter (bargraph) and FFT (cont. spectrum) method; absolute or relative readout
- ◆ OBW (occupied bandwidth)
- ◆ SEM (spectrum emission mask)
- ◆ CDP (code domain power): CDP vs all codes, CDP vs DCH channels, RHO versus all codes, RHO versus DCH channels. All measurements in relative or absolute readout
- ◆ Modulation (for 3GPP or general QPSK): EVM (error vector magnitude), magnitude error, phase error, frequency error, I/Q offset, I/Q imbalance, peak code domain error, RHO (waveform quality)
- ◆ Power: MAX, MIN, OFF (UE test mode)
- ◆ Autoranging for received UE signal

The non-signalling mode allows tests of all essential RF parameters of the connected UE (user equipment). The measurements are performed in unsynchronized mode. No time-consuming call setup is done to evaluate UE performance using these measurements.

## RX measurements

A synchronization (but still no call setup) is needed for RX evaluation, synchronized TX measurements and some additional TX measurements, such as

- ◆ Inner loop power control with TPC commands: TPC stepping measurement (UE receives TPC commands from CMU200 generator)
- ◆ Receiver quality: BER, BLER, (with UE-assisted evaluation, no RF loopback)

The generated channels and functions available are

- ◆ P-CPICH/P-SCH/S-SCH/P-CCPCH/DPCCCH/DPDCH
- ◆ TPC profiles

In conjunction with the Rohde&Schwarz Baseband Fading Simulator ABFS and the planned option CMU-B17, conditions of fading may be simulated and evaluated with the CMU200.

## FDD signalling mode (planned)

Signalling tests are tests carried out in an environment closer to a real-life network. However, in a production context they may not be absolutely necessary.

In this mode the CMU200 simulates a WCDMA base-station RF interface including the signalling protocol so that a mobile can be tested with regard to different signalling parameters. All necessary network and Node B (base station) parameters such as control and data channel configurations can be set. This mode will be supported in a next step. In addition to the non-signalling tests, it provides features such as



- ◆ Power: MAX, MIN, OFF (UE signalling mode)
- ◆ Power control: ON/OFF time mask, open loop power control, inner loop power control (3GPP mode)
- ◆ Receiver quality: BER, BLER, (with RF loopback)
- ◆ Call setup and release / paging
- ◆ Test mode connection


## WCDMA development

With its great versatility the CMU200 is also a suitable tool for the development of mobile phones. Four configurable RF connectors are provided to enable flexible signal levels. The clearly structured and user-friendly menu design together with the clear-cut screen layout provides quick access to all features and ensures trouble-free monitoring of the device under test. The tester can be switched between 3GPP and general QPSK modes to increase the usability with DUTs under development.


## Quality assurance

Due to its high measurement repeatability and accuracy, the CMU200 is the right choice to ensure a consistently high quality standard. WCDMA-specific measurements such as BER, EVM, and full implementation of complementary (i.e. ACLR and OBW) measurements provide an excellent test platform to guarantee the production of high-quality devices.


*The overview menu provides fast comprehensive information on the UE's RF performance. The hotkeys at the bottom of the screen give immediate access to specific and detailed measurements.*

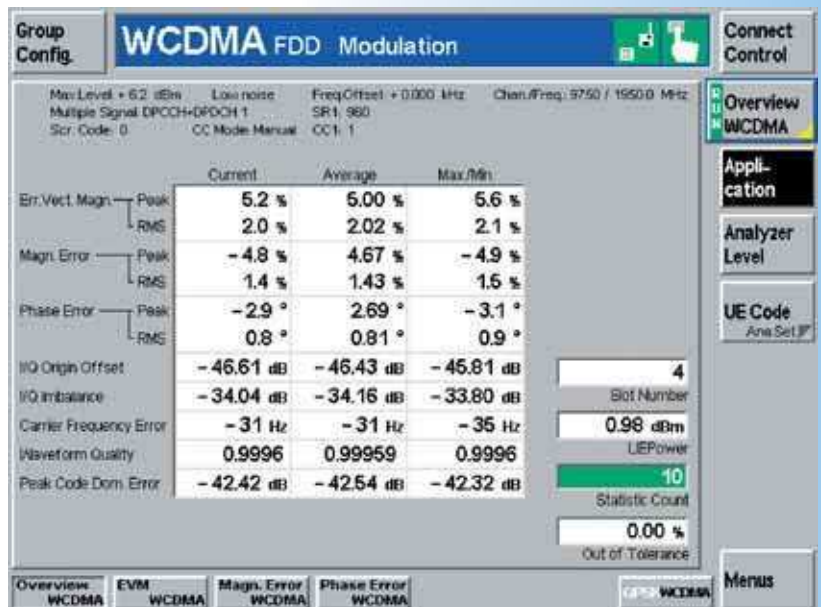

*The screenshot shown here is just one of the 4 comprehensive ways to display the UE code domain power in non-signalling mode.*

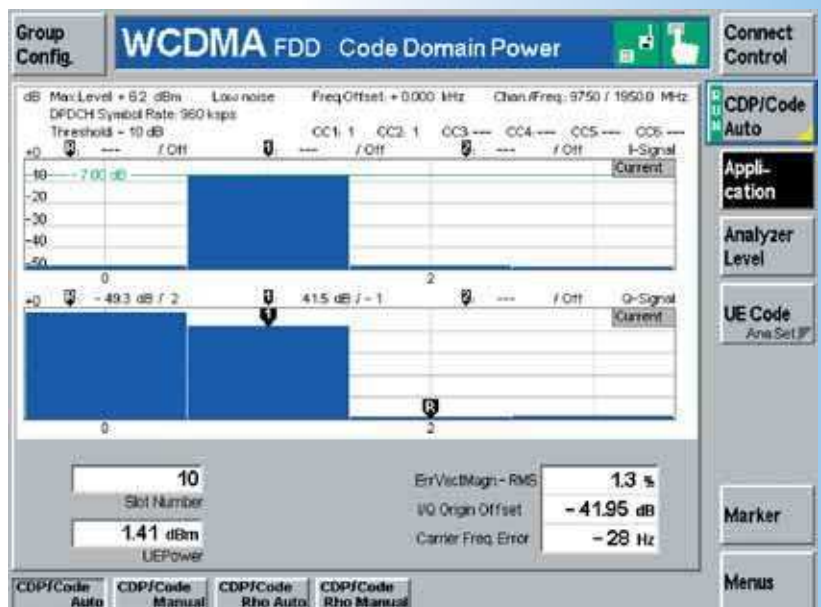

*The ACLR menu shows all adjacent-channel-related information in graphical as well as in scalar numerical form. Since the ACLR FFT and OBW measurement methods are closely related, results for occupied bandwidth are displayed simultaneously. The scalar display excluding the center channel (0 MHz) may be switched to absolute readout as well.*

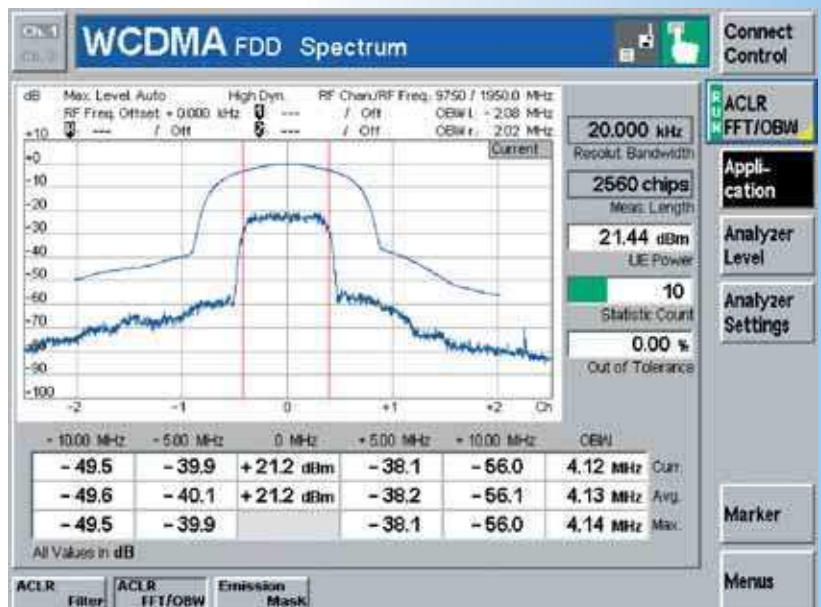


# WCDMA in CMU200

## Production of mobile phones

The production of mobile phones requires time-efficient and cost-effective means that ensure both high throughput and state-of-the-art accuracy. Thanks to the unique IEC/IEEE-bus concept of the CMU200, these two goals can be easily achieved in your production line. The intelligent handling of the GPIB commands received thoroughly optimizes the speed for WCDMA-specific measurements. In practice, this will mean reduced test time and enhanced test yield.

## Switching standards

The flexibility of the CMU200 makes for quick and simple switching between different standards. This is very important as many 3GPP UEs for markets with networks of these second generation stand-

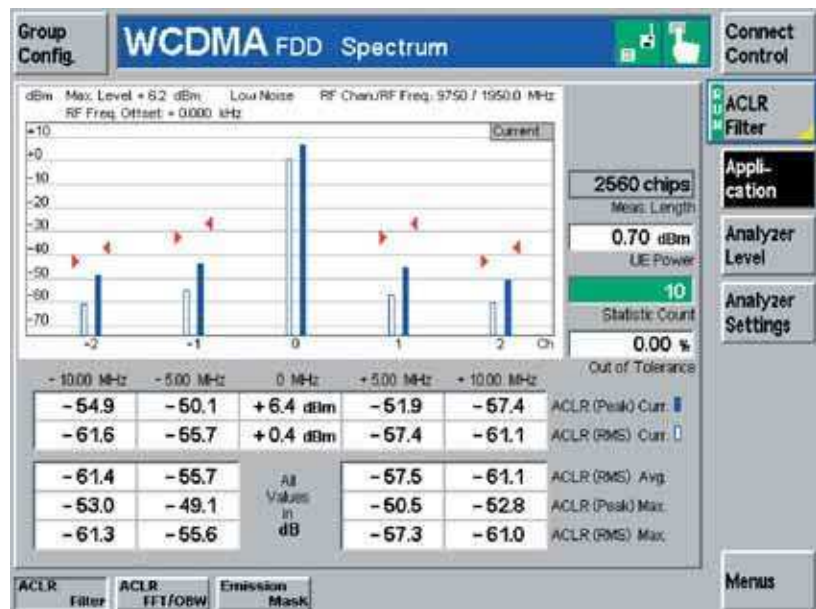

**ACLR measurements are available using two different measurement methods and displays. In this screenshot, the ACLR is measured using the filter method to obtain results for 5 channels. The scalar display excluding the center channel (0 MHz) may be switched to absolute readout as well.**

ards are going to be dual-mode even without a handover being defined.

Switching between WCDMA and any other CMU200 supported standard can

## WCDMA specifications – Mobile station (UE) test

Standard	3GPP-FDD
Symbol rate	3.84 MHz
Synchronization output 2	BNC connector REFOUT2
Frequency	30.72 MHz

### RF generator

Channels	P-CPICH, P-SCH, S-SCH, P-CCPCH, DPCH
Channel levels	-30 dB to +15 dB relative to CPICH
Reference measurement channel RMC	12.2 kbps, 64 kbps, 144 kbps, 384 kbps (3GPP TS34.121)
Frequency range	869 MHz to 894 MHz 921 MHz to 960 MHz 1805 MHz to 1880 MHz 1930 MHz to 1990 MHz 2110 MHz to 2170 MHz

Frequency resolution	0.1 Hz
Output level range <sup>1)</sup>	
RF1	-120 dBm to -36 dBm
RF2	-120 dBm to -22 dBm
RF3OUT	-80 dBm to 0 dBm
Output level uncertainty	
RF1, RF2: ≥ -110 dBm	+23°C to +35°C <0.6 dB
RF3OUT: ≥ -80 dBm	+5°C to +45°C <0.8 dB

Signal quality	
Error vector magnitude (EVM)	<5% <sup>2)</sup>

### RF analyzer (TX measurements)

Frequency range	824 MHz to 849 MHz 876 MHz to 915 MHz 1710 MHz to 1785 MHz 1850 MHz to 1910 MHz 1920 MHz to 1980 MHz
-----------------	--

Frequency resolution	1 Hz
Reference level for full dynamic range	
RF1	
Continuous power <sup>3)</sup>	0 dBm to +47 dBm
Peak envelope power (PEP) <sup>4)</sup>	0 dBm to +53 dBm
RF2	
Continuous power	-14 dBm to +33 dBm
Peak envelope power (PEP) <sup>4)</sup>	-14 dBm to +39 dBm
RF4IN	
Continuous power and PEP	-37 dBm to +0 dBm
Modulation analysis <sup>5)</sup>	
Measurement filter	receiver filter according to standard
Analysis modes	3.84 MHz, RRC, a=0.22 QPSK, WCDMA uplink
Error vector magnitude (EVM)	
Measurement range	up to 25 %
Inherent EVM, rms	<2.5 % <sup>6)</sup>
Resolution	0.1 %
Frequency error	
Measurement range <sup>7)</sup>	±3 kHz
Uncertainty	<10 Hz + drift of time base
Resolution	1 Hz
I/Q offset	
Inherent I/Q offset	<-55 dB
Resolution	0.01 dB
I/Q imbalance	
Inherent I/Q imbalance	<-30 dB
Resolution	0.01 dB
Waveform quality	
Measurement range	0.9 to 1.0
Uncertainty	<0.002
Resolution	0.0001

<sup>1)</sup> For crest factor ≤13 dB.

<sup>2)</sup> Global EVM for DL reference measurement channels (according 3GPP TS34.121 C3.1 to C3.4) with DPCH/CPICH = 0 dB


<sup>3)</sup> 50 W in temperature range +5°C to +30°C, linear degradation down to 25 W at 45°C.

<sup>4)</sup> Mean value of power vs time must be equal to or less than allowed continuous power.

<sup>5)</sup> The specified data is valid for "Low Noise Mode" operation.

<sup>6)</sup> With CMU-26 <1.5% typ.

<sup>7)</sup> At 12.2 kbps reference measurement channel.

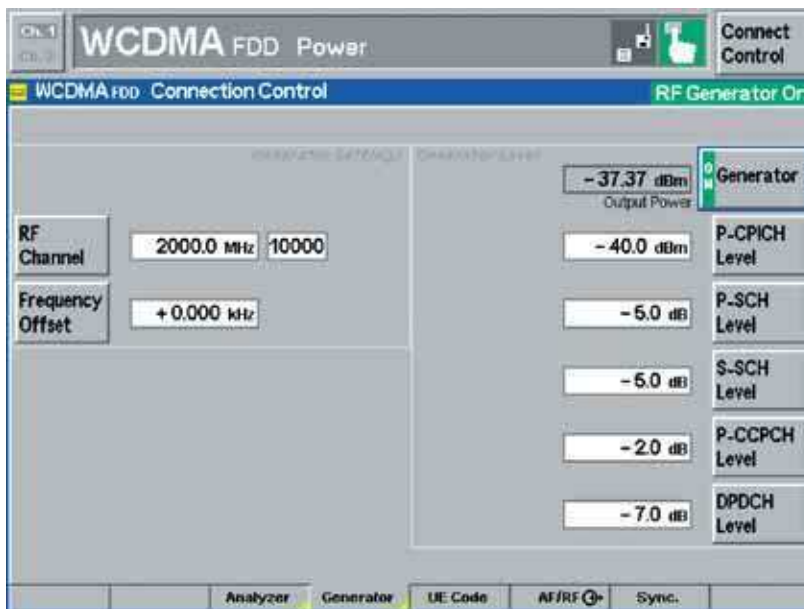

This screenshot shows the independent generator settings for the various channels. All channels can be set relative to the pilot in a wide level range.

### WCDMA-related features

- ◆ Shortest measurement time ensuring high throughput
- ◆ Benchmark-breaking IEEE-bus speed (see highlights of base unit)
- ◆ Combined measurements, many different measurement modes
- ◆ Multiband/multimode testing
- ◆ Powerful signalling capabilities as part of a clear upgrade path
- ◆ Mobile- or base-station originated call connect/disconnect available as a next functionality step
- ◆ Simple interactive operation, standardized MMI
- ◆ No specialized network knowledge required

be achieved by a simple remote command or by pressing a button. It allows a

very versatile production test layout and improves the flexibility and throughput of your multimode UE application.

#### Peak code domain error (PCDE)

Uncertainty	<0.5 dB
Resolution	0.01 dB

Resolution

0.1 dB

#### Power measurements<sup>9)</sup>

##### Maximum power

wideband filter

##### Minimum/off power

receiver filter acc. to standard 3.84 MHz, RRC, a=0.22

##### Level range

	RF1	RF2	RF4IN
Continuous power	-52 dBm to +47 dBm <sup>9)</sup>	-66 dBm to +33 dBm	-89 dBm to 0 dBm <sup>10)</sup>
Peak envelope power (PEP)	-42 dBm to +53 dBm <sup>9)</sup>	-56 dBm to +39 dBm <sup>9)</sup>	-79 dBm to 0 dBm

##### Level uncertainty

	+23°C to +35°C	+5°C to +45°C
RF1		
-10 dBm to +47 dBm, rms	<0.5 dB	<0.7 dB
-44 dBm to -10 dBm, rms	<0.7 dB	<0.9 dB
RF2		
-24 dBm to +33 dBm, rms	<0.5 dB	<0.7 dB
-60 dBm to -24 dBm, rms	<0.7 dB	<0.9 dB
RF4IN		
-24 dBm to 0 dBm, rms	<0.5 dB	<0.7 dB
-85 dBm to -24 dBm, rms	<0.7 dB	<0.9 dB

##### Level resolution

0.01 dB

#### Code domain power

Measurement filter

receiver filter according to standard 3.84 MHz, RRC, a=0.22

##### Level range

RF1	-8 dBm to +47 dBm
RF2	-22 dBm to +33 dBm
RF4IN	-45 dBm to 0 dBm
Level resolution	0.01 dB

#### Spectrum measurements<sup>8)</sup>

##### ACLR(FFT)

Measurement filter	receiver filter according to standard 3.84 MHz, RRC, a=0.22
Resolution bandwidth	20 kHz
Frequency offsets	
First adjacent channel	±5 MHz
Second adjacent channel	±10 MHz
Dynamic range	
First adjacent channel	>54 dB
Second adjacent channel	>62 dB
Resolution	0.1 dB

##### ACLR (filter)

Measurement filter	receiver filter according to standard 3.84 MHz, RRC, a=0.22
Frequency offsets	
First adjacent channel	±5 MHz
Second adjacent channel	±10 MHz
Dynamic range	
First adjacent channel	>54 dB
Second adjacent channel	>62 dB
Resolution	0.1 dB

#### Occupied bandwidth

Range	1 MHz to 6 MHz
Uncertainty	<100 kHz
Resolution	20 kHz

#### Spectrum emission mask

Measurement filter	
± 2.515 MHz to ± 3.485 MHz	30 kHz Gaussian filter
± 4.0 MHz to ± 12.0 MHz	1 MHz Gaussian filter
Dynamic range	
± 2.515 MHz to ± 3.485 MHz	>72 dB
± 4.0 MHz to ± 7.5 MHz	>59 dB
± 8.5 MHz to ± 12.0 MHz	>67 dB

<sup>8)</sup> The specified data is valid for "High Dynamic Mode" operation.

<sup>10)</sup> Upper limit depends on crest factor.



# Bluetooth™ measurements in CMU200

## General

The CMU200 was the first *Bluetooth* test set on the market and is the only tester which performs all measurements in full hopping, reduced hopping or non-hopping mode. Measurements using DH1, DH3 and DH5 packets are supported. According to the *Bluetooth* Test Mode Specification, the DUT has to be locally enabled for test mode operation. The CMU200 switches the DUT to test mode and performs a number of basic RF measurements (TX and RX).

## Applications

The CMU200 with the *Bluetooth* option is the ideal instrument for production, development and maintenance of any kind of devices with integrated *Bluetooth* interface.

Due to its modular platform concept, the CMU200 is the ideal solution for all cellular standard mobile phones production lines.

## Parallel operation for high measurement speed

Due to the high measurement speed and large memory capacity of the CMU200, transmitter and receiver measurements can be carried out simultaneously. When measurements are performed in frequency hopping mode, a great test depth is rapidly attained. Only a few seconds are required between call setup, transmitter and receiver measurements and call detach. Fast test cycles guarantee a fast return of investment.

## Many convenient measurement functions

The CMU200 offers a great number of statistical monitoring and measurement functions. It is possible, for instance, to define individual tolerances for each measured value and to stop a measurement sequence after a certain number of measurements or when a tolerance has been exceeded. Besides the common traces for power and modulation versus time, averaged minimum or maximum traces can also be displayed over a user-defined number of packets.

## Signalling

### Setting up a *Bluetooth* connection

The CMU200 acts as the master of a *Bluetooth* piconet, the DUT as a slave. The CMU200 is able to perform the inquiry procedure for the identification of all *Bluetooth* devices within range of the CMU200. All devices found are listed on the display and one of them can be selected for the paging procedure. The CMU200 then establishes the connection to the DUT and switches it to test mode operation.

The inquiry procedure can be skipped, if the *Bluetooth* device address of the DUT is already known. In this case a shorter setup time for the connection can be achieved. This is important for production tests of *Bluetooth* devices to increase the maximum throughput of a production line.

## Signalling information from the DUT


The CMU200 is able to display a variety of information which is received from the DUT (e.g. device name, version numbers, service class, supported features).

## Compliance with existing *Bluetooth* standards


The CMU200 is compliant with the *Bluetooth* Core Specifications Ver. 1.0 B and 1.1. The *Bluetooth* Test Mode (Core Spec. Part I:1) is implemented with all commands needed to perform the TX/RX measurements.

The *Bluetooth* RF Test Specification Ver. 0.91 describes RF test cases for the *Bluetooth* qualification process. Rohde&Schwarz offers the Test System TS8960 for *Bluetooth* qualification tests, which is fully compliant with the RF Test Specification. Although the CMU200 was not designed for qualification tests, the RF Test Specification was taken as a guideline for the implementation of the CMU200's *Bluetooth* measurements. All TX measurements are implemented according to the test specification 0.91.


The connection control menu allows the addresses of all Bluetooth devices in range to be inquired. The "Device to page" softkey then selects the DUT for the measurements. Alternatively, the input of a known address is possible.

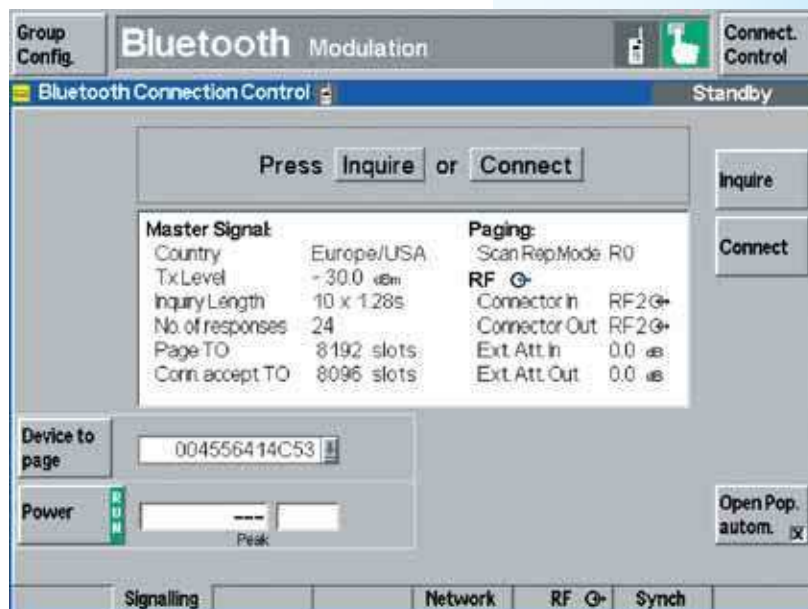

The power menu shows the results in graphical and scalar form. Statistical functions as well as convenient markers facilitate further evaluation. The timing measurement complements the numerical power results.

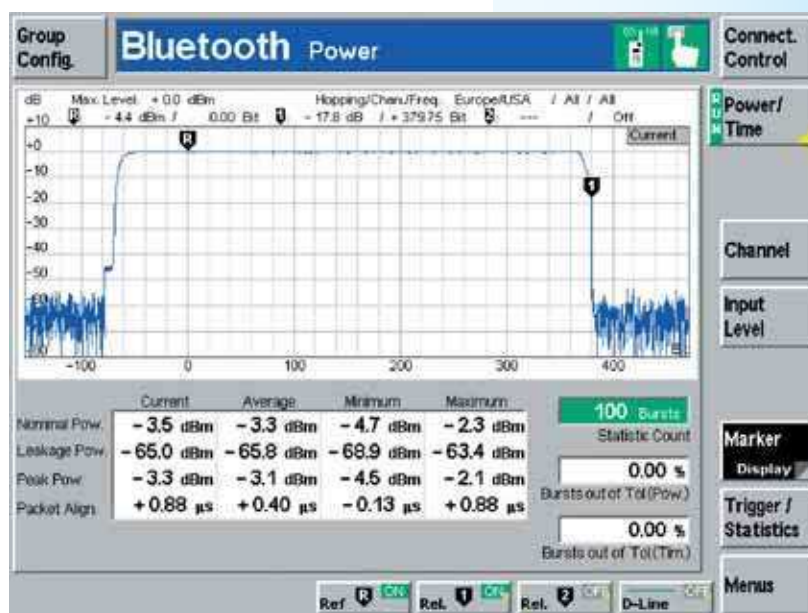

The graphical display of the modulation results may be spread between 1/1 and 1/16 of a burst for in-depth analysis. The "Max. Freq. Dev." and "Min. Freq. Dev." results allow the highest and lowest values for 10 bit long fractions of a payload to be evaluated individually.

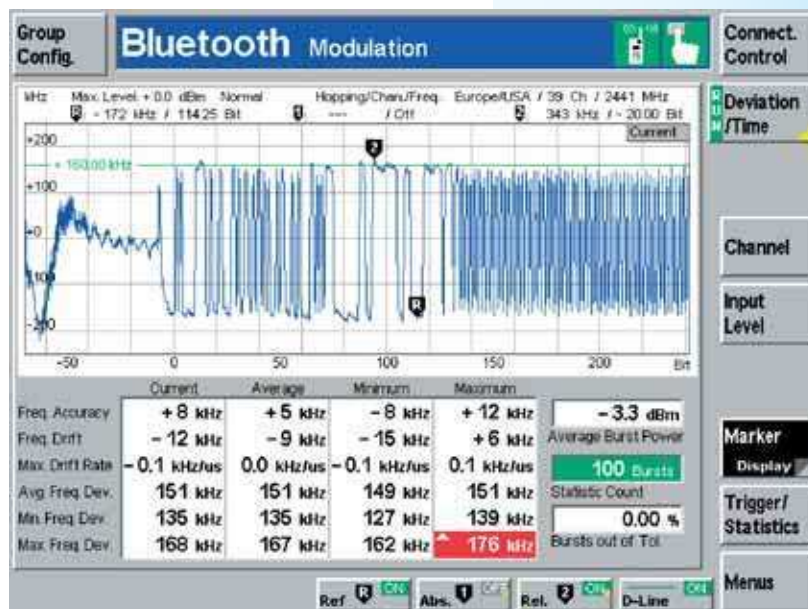

# Bluetooth wireless technology in CMU200

## TX measurements

The current measurement values for each parameter are displayed on the CMU200 screen. Additionally, average, maximum and minimum values are displayed as a result of a statistical evaluation of a settable number of *Bluetooth* packets (bursts).

### Power measurements (output power)

Measurement parameters:

- ◆ Nominal power (measured as the part of the burst starting at the detected 1st bit of the preamble (bit 0) to the last bit of the burst)
- ◆ Peak power (shows the highest power level within a burst)
- ◆ Leakage power (measured within defined areas before and after the burst)

### Timing measurements (packet timing error)

Measurement parameter:

- ◆ Packet alignment (distance between ideal master receiver slot and detected bit 0 of the received burst)

This measurement is displayed on the "Power" screen.

### Modulation measurements (modulation characteristics/quality)

Measurement parameters:

- ◆ Frequency accuracy/Initial carrier frequency tolerance ICFT (difference between measured frequency and intended transmitted frequency, measured in the preamble at the beginning of a packet)
- ◆ Carrier frequency drift (difference between the frequency at the start of the packet and the frequency in the payload)
- ◆ Maximum drift rate (maximum drift rate anywhere within the packet payload)
- ◆ Average, maximum and minimum frequency deviation (calculated over the packet payload)

## RX measurements

For RX measurements, the built-in signal generator generates a selectable bit sequence, which is looped back in the DUT and demodulated and processed by the CMU200 again. The TX level of the CMU200 can be adjusted for this measurement. The BER application allows up to five test programs to be defined. Each program can independently set settings such as control parameters, limits, repetition or statistical cycles.

### Sensitivity (single slot packets/multi-slot packets)

Measurement parameters

- ◆ BER (percentage of bit errors that have occurred within the current statistical cycle)



The device under test can be connected to the CMU200 via an RF coupler (antenna) or a cable

## Bluetooth specifications

Standards	Bluetooth Core Specifications Version 1.0 B and 1.1
-----------	---

### RF generator

#### Frequency range

Europe (except Spain and France), USA and Japan	2.4000 GHz to 2.4835 GHz
France	2.4465 GHz to 2.4835 GHz
Spain	2.4450 GHz to 2.475 GHz

#### Frequency resolution

channel spacing 1 MHz according to standard

#### Frequency hopping

all modes according to standard

#### Output level range (modulated signal)

RF1	-106 dBm to -33 dBm
RF2	-106 dBm to -12 dBm
RF3OUT	-90 dBm to +5 dBm

#### Output level resolution

0.1 dB

#### Output level uncertainty

	+23°C to +35°C	+5°C to +45°C
RF1, RF2	<0.9 dB	<1.6 dB
RF3OUT	<1.1 dB	<1.6 dB

#### Modulation

GFSK (AC coupling cut-off frequency 100 Hz) Modulation index (11110000 pattern in temperature range +23°C to +35°C)	1 Mbps, BxT=0.5 0.304 to 0.336 plus residual FM (see base unit)
--	--

### RF analyzer

#### Frequency range

Europe (except Spain and France), USA and Japan	2.4000 GHz to 2.4835 GHz
France	2.4465 GHz to 2.4835 GHz
Spain	2.4450 GHz to 2.475 GHz

#### Frequency resolution


channel spacing 1 MHz according to standard

#### Frequency hopping

all modes according to standard



## Bluetooth wireless technology highlights of CMU200

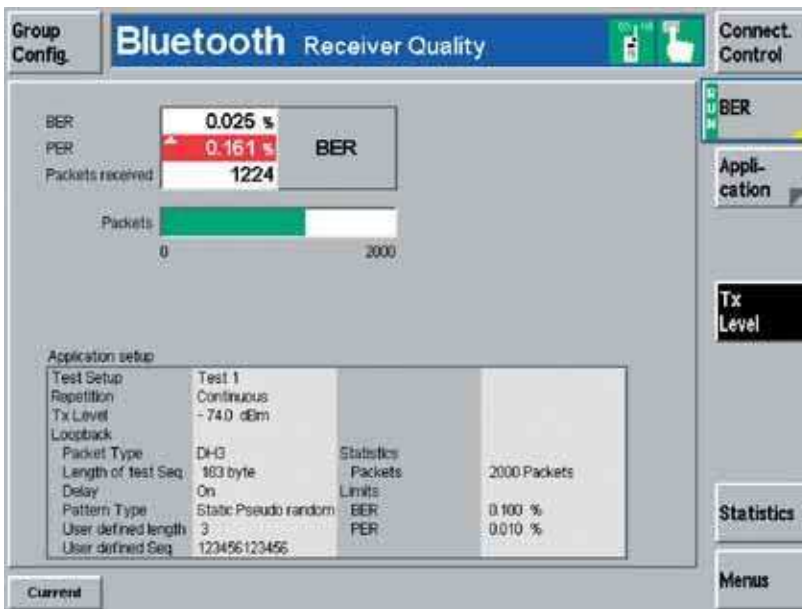

The receiver quality measurement includes output of BER and PER values. Supports three modes, i.e. single shot, continuous and search of a target BER value, by automatic variation of the CMU200 output level. Up to 5 different test scenarios can be configured.

- ◆ BER search function (sensitivity level for a predefined BER level)
- ◆ PER (percentage of packet errors that have occurred within the current statistical cycle, where an errored packet is a packet with a header which cannot be corrected)

- ◆ Bluetooth test mode signalling
- ◆ Full hopping mode measurements
- ◆ All packet types (DH 1, 3, 5)
- ◆ High measurement accuracy and speed
- ◆ Parallel TX and RX measurement of the RF interface in loopback mode
- ◆ Output of Bluetooth-specific clock signal
- ◆ IF signal output
- ◆ Graphical and scalar result output

## Supported standards

- ◆ Bluetooth Core Specifications Version 1.0 B and 1.1
- ◆ RF Test Specification Version 0.91

BLUETOOTH is a trademark owned by Bluetooth SIG, Inc., USA and licensed to Rohde & Schwarz

## Power meter (frequency-selective) and power versus time

<b>Level Resolution</b>	0.1 dB	
<b>Reference level for full dynamic range (GFSK signal)</b>		
RF1	0 dBm to +41 dBm	
RF2	-14 dBm to +33 dBm	
RF4IN	-32 dBm to 0 dBm	
<b>Level uncertainty from full scale down to -25 dB</b>		
	+23°C to +35°C	+5°C to +45°C
RF1, RF2	<0.7 dB	<1.0 dB
RF4IN	<0.9 dB	<1.1 dB
Dynamic range	>55 dB (BW= 3 MHz, rms)	

## Modulation analyzer (BW= 3 MHz)

<b>Level range (GFSK signal)</b>	
RF1, RF2, RF4IN	from full-scale setting down to -25 dB
Frequency offset error in preamble	≤2 kHz
Frequency deviation error in payload (for deviation ≤200 kHz)	≤2 %
for 11110000 pattern	≤4 %
for 10101010 pattern	
Total measurement range for frequency offset and frequency deviation	-250 kHz to +250 kHz

## Timing measurement

Range	±20 µs
Uncertainty	≤0.25 µs

## Base unit specifications

Please see standard-specific data on the previous pages for more details and improved accuracy.

### Timebase TCXO

Max. frequency drift in temperature range +5°C to +45°C	$\pm 1 \times 10^{-6}$
Max. aging	$\pm 1 \times 10^{-6}$ /year

### Timebase OCXO – option CMU-B11

Max. frequency drift in temperature range +5°C to +45°C	$\pm 1 \times 10^{-7}$
Max. aging	$\pm 2 \times 10^{-7}$ /year, $\pm 5 \times 10^{-9}$ /day after 30 days of operation approx. 5 min
Warmup time (at +25°C)	

### Timebase OCXO – option CMU-B12

Max. frequency drift in temperature range +5°C to +45°C with instrument orientation referred to turn-off frequency after 2 h warmup time following a 24 h off time at +25°C	$\pm 5 \times 10^{-9}$ , referred to +25°C $\pm 3 \times 10^{-9}$
Max. aging	$\pm 5 \times 10^{-9}$ $\pm 3.5 \times 10^{-8}$ /year, $\pm 5 \times 10^{-10}$ /day after 30 days of operation approx. 10 min
Warmup time (at +25°C)	

### Reference frequency inputs/outputs

Synchronization input	BNC connector REF1N
Frequency	
Sinewave	1 MHz to 52 MHz, step 1 kHz
Squarewave (TTL level)	10 kHz to 52 MHz, step 1 kHz
Max. frequency variation	$\pm 5 \times 10^{-6}$
Input voltage range	0.5 V to 2 V, rms
Impedance	50 $\Omega$
Synchronization output 1	BNC connector REFOUT1
Frequency	10 MHz from internal reference or frequency at synchronization input
Output voltage	>1.4 V, peak-peak
Impedance	50 $\Omega$
Synchronization output 2	BNC connector REFOUT2
Frequency	net-specific frequencies in range 100 kHz to 40 MHz
Output voltage (f $\leq$ 13 MHz)	>1.0 V, peak-peak
Impedance	50 $\Omega$

## RF generator

Frequency range	100 kHz to 2700 MHz
Frequency resolution	0.1 Hz
Frequency uncertainty	same as timebase + resolution
Frequency settling time	<400 $\mu$ s to $\Delta f$ < 1 kHz

### Output level range

RF1	
100 kHz to 2200 MHz	–130 dBm to –27 dBm
2200 MHz to 2700 MHz	–130 dBm to –33 dBm
RF2	
100 kHz to 2200 MHz	–130 dBm to –10 dBm
2200 MHz to 2700 MHz	–130 dBm to –16 dBm
RF3OUT	
100 kHz to 2200 MHz	–90 dBm to +13 dBm
2200 MHz to 2700 MHz	–90 dBm to +5 dBm

### Output level uncertainty

RF1, RF2	
in temperature range +23°C to +35°C	$\geq -106$ dBm $\geq -117$ dBm $-117$ to $-130$ dBm
10 MHz to 450 MHz	<0.6 dB
450 MHz to 2200 MHz	<0.6 dB $<0.6$ dB <sup>2)</sup> <1.5 dB <sup>1)2)</sup>
2200 MHz to 2700 MHz	<0.8 dB $<0.8$ dB <sup>2)</sup> <1.5 dB <sup>1)2)</sup>
in temperature range +5°C to +45°C	$\geq -106$ dBm $\geq -117$ dBm $-117$ to $-130$ dBm
10 MHz to 450 MHz	<1.0 dB
450 MHz to 2200 MHz	<1.0 dB $<1.0$ dB <sup>2)</sup> <1.5 dB <sup>1)2)</sup>
2200 MHz to 2700 MHz	<1.5 dB $<1.5$ dB <sup>2)</sup> <1.5 dB <sup>1)2)</sup>

<sup>1)</sup> Valid for RF1 only.

<sup>2)</sup> Not valid at frequencies of netclock harmonics.

	+23°C to +35°C	+5°C to +45°C
RF3OUT		
10 MHz to 450 MHz: –80 dBm to +10 dBm	<0.8 dB	<1.0 dB
450 MHz to 2200 MHz: –90 dBm to +10 dBm	<0.8 dB	<1.0 dB
2200 MHz to 2700 MHz: –90 dBm to +5 dBm	<1.0 dB	<1.5 dB

### Output level settling time

	<4 $\mu$ s
--	------------

### Output level resolution

	0.1 dB
--	--------

### Generator RF level repeatability

(RF1, RF2, RF3OUT, typical values after 1 h warmup)	
Output $\geq -80$ dBm	<0.01 dB
Output $< -80$ dBm	<0.1 dB

### VSWR

RF1	
10 MHz to 2000 MHz	<1.2
2000 MHz to 2200 MHz	<1.3
2200 MHz to 2700 MHz	<1.6
RF2	
10 MHz to 2200 MHz	<1.2
2200 MHz to 2700 MHz	<1.6
RF3OUT	
10 MHz to 2200 MHz	<1.5
2200 MHz to 2700 MHz	<1.7

### Attenuation of harmonics (f<sub>0</sub> = 10 MHz to 2200 MHz, up to 7 GHz)

RF1, RF2	>30 dB
RF3OUT (P $\leq$ +10 dBm)	>20 dB

### Attenuation of nonharmonics

10 MHz to 2200 MHz at >5 kHz from carrier	>40 dB
---	--------

### Phase noise (single sideband, f < 2.2 GHz)

Carrier offset	
20 kHz to 250 kHz	<–100 dBc(1 Hz)
$\geq 250$ kHz	<–110 dBc(1 Hz)

### Residual FM

30 Hz to 15 kHz	<50 Hz (rms), <200 Hz (peak)
CCITT	<5 Hz (rms)

### Residual AM

CCITT	<0.02% (rms)
-------	--------------

### I/Q modulation

Data for frequency offset range 0 kHz to $\pm 135$ kHz	
Carrier suppression	>40 dB

## RF analyzer

### VSWR

RF1	
10 MHz to 2000 MHz	<1.2
2000 MHz to 2200 MHz	<1.3
2200 MHz to 2700 MHz	<1.6
RF2	
10 MHz to 2200 MHz	<1.2
2200 MHz to 2700 MHz	<1.6
RF4IN	
10 MHz to 2200 MHz	<1.5
2200 MHz to 2700 MHz	<1.6

### Power meter (wideband)

Frequency range	100 kHz to 2700 MHz
-----------------	---------------------

### Level range

RF1	
Continuous power <sup>3)</sup>	
100 kHz to 2200 MHz	+6 dBm to +47 dBm (50 W)
2200 MHz to 2700 MHz	+10 dBm to +47 dBm (50 W)
Peak envelope power <sup>4)</sup> (PEP)	+53 dBm (200 W)
RF2	
Continuous power	
100 kHz to 2200 MHz	–8 dBm to +33 dBm (2 W)
2200 MHz to 2700 MHz	–4 dBm to +33 dBm (2 W)
Peak envelope power <sup>4)</sup> (PEP)	+39 dBm (8 W)
RF4IN (continuous power and PEP)	
100 kHz to 2200 MHz	–33 dBm to 0 dBm
2200 MHz to 2700 MHz	–29 dBm to 0 dBm

<sup>3)</sup> 50 W in temperature range +5 °C to +30 °C, linear degradation down to 25 W at 45 °C.

<sup>4)</sup> Mean value of power vs time must be equal to or less than allowed continuous power.

<b>Level uncertainty</b>		
RF1	+10 dBm to +20 dBm	+20 dBm to +47 dBm
50 MHz to 2700 MHz	<1.0 dB <sup>5)</sup>	<0.5 dB <sup>5)</sup>
RF2	−4 dBm to +6 dBm	+6 dBm to +33 dBm
50 MHz to 2700 MHz	<1.0 dB <sup>5)</sup>	<0.5 dB <sup>5)</sup>
RF4IN	−29 dBm to −19 dBm	−19 dBm to 0 dBm
50 MHz to 2700 MHz	<1.5 dB	<0.8 dB
<b>Level resolution</b>		
	0.1 dB (0.01 dB via remote control)	

## Power meter (frequency-selective)

Frequency range	10 MHz to 2700 MHz
Frequency resolution	0.1 Hz
Resolution bandwidths	10 Hz to 1 MHz in 1/2/3/5 steps

## Level range

RF1	
Continuous power <sup>3)</sup>	
10 MHz to 2200 MHz	−40 dBm to +47 dBm (50 W)
2200 MHz to 2700 MHz	−34 dBm to +47 dBm (50 W)
Peak envelope power <sup>4)</sup> (PEP)	+53 dBm (200 W)
RF2	
Continuous power	
10 MHz to 2200 MHz	−54 dBm to +33 dBm (2 W)
2200 MHz to 2700 MHz	−48 dBm to +33 dBm (2 W)
Peak envelope power <sup>4)</sup> (PEP)	+39 dBm (8 W)
RF4IN (continuous power and PEP)	
10 MHz to 2200 MHz	−80 dBm to 0 dBm
2200 MHz to 2700 MHz	−74 dBm to 0 dBm

## Level uncertainty

	+23°C to +35°C	+5°C to +45°C
RF1, RF2		
50 MHz to 2200 MHz	<0.5 dB	<1.0 dB
2200 MHz to 2700 MHz	<0.7 dB	<1.0 dB
RF4IN		
50 MHz to 2200 MHz	<0.7 dB	<1.0 dB
2200 MHz to 2700 MHz	<0.9 dB	<1.1 dB

## Level resolution

0.1 dB (0.01 dB via remote control)

## RF level measurement repeatability

(RF1, RF2, RF4IN, typical values after 1 h warmup)	
Input ≥−40 dBm	<0.01 dB
Input <−40 dBm	<0.03 dB

## Demodulation (data of hardware paths)

## Phase noise (single sideband, f <2.2 GHz)

Carrier offset	
20 kHz to 250 kHz	<−100 dBc(1 Hz)
250 kHz to 400 kHz	<−110 dBc(1 Hz)
≥400 kHz	<−118 dBc(1 Hz)

## Residual FM

30 Hz to 15 kHz	<50 Hz (rms), <200 Hz (peak)
CCITT	<5 Hz (rms)

## Residual AM

CCITT	<0.02% (rms)
-------	--------------

## Spectrum analyzer

Frequency range	10 MHz to 2.7 GHz
Span	zero span to full span
Frequency resolution	0.1 Hz
Resolution bandwidths	10 Hz to 1 MHz in 1/2/3/5 steps
Sweep time	≥100 ms, depending on RBW
Display	560 dots, horizontal
Marker	up to 3, absolute/relative
Display line	1
Display scale	10/20/30/50/80/100 dB

## Level range

RF1	
Continuous power <sup>3)</sup>	up to +47 dBm (50 W)
Peak envelope power <sup>4)</sup> (PEP)	up to +53 dBm (200 W)
RF2	
Continuous power	up to +33 dBm (2 W)
Peak envelope power <sup>4)</sup> (PEP)	up to +39 dBm (8 W)
RF4IN (continuous power and PEP)	up to 0 dBm

## Level uncertainty

	+23°C to +35°C	+5°C to +45°C
RF1, RF2		
50 MHz to 2200 MHz	<0.5 dB	<1.0 dB
2200 MHz to 2700 MHz	<0.7 dB	<1.0 dB
RF4IN		
50 MHz to 2200 MHz	<0.7 dB	<1.0 dB
2200 MHz to 2700 MHz	<0.9 dB	<1.1 dB

## Reference level for full dynamic range (low noise mode)

Logarithmic level display	
RF1	+10 dBm to +47 dBm
RF2	−4 dBm to +33 dBm
RF4IN	−22 dBm to 0 dBm

## Displayed average noise level (RBW 1 kHz, low noise mode)

RF1/RF2/RF4IN	
10 MHz to 2200 MHz	<−100 dBc
2200 MHz to 2700 MHz	<−95 dBc

## Inherent spurious response

Low distortion mode, 20 MHz to 2200 MHz, except 1816.115 MHz

## Inherent harmonics

(f<sub>0</sub> = 50 MHz to 2200 MHz, up to 7 GHz)

RF1, RF2	<−30 dB
RF4IN	<−20 dB

## Audio option CMU-B41

## AF generator

Output impedance	<4 Ω
Maximum output current	20 mA (peak)

## AF sine generator

Frequency range	20 Hz to 20 kHz
Frequency uncertainty	same as time base + half resolution
Frequency resolution	0.1 Hz
Output level range	10 μV to 5 V
Output level resolution	
at level <10 mV	10 μV
at level ≥10 mV	0.1%
Output level uncertainty	
at level ≥1 mV and frequency ≤10 kHz	≤1.5% + resolution

THD+N <sup>7)</sup>	
at level ≥100 mV into load ≥600 Ω	≤0.05%

THD <sup>7)</sup>	
at level ≥100 mV into load ≥600 Ω	≤0.025%

## AF analyzer

Input impedance	1MΩ   100 pF
-----------------	--------------

## AF voltmeter

Frequency range	50 Hz to 20 kHz
Level range	50 μV to 30 V
Level resolution	
at level <1 mV	1 μV
at level ≥1 mV	0.1%
Level uncertainty	
at 1 mV ≤ level ≤ 2 V	<1% + resolution
at 2 V < level ≤ 20 V	<2% + resolution

## THD+N meter

Measurement bandwidth	21 kHz
Frequency range	100 Hz to 10 kHz
Level range	10 mV to 30 V
Resolution	0.01% THD+N
Inherent distortion	
at 100 mV ≤ level ≤ 20 V	<0.05% THD+N
Uncertainty	
at 100 mV ≤ level ≤ 2 V	<1% + inherent distortion
at 2 V < level ≤ 20 V	<2% + inherent distortion

<sup>5)</sup> Calibrated for P>33 dBm only in frequency range 800 MHz to 2000 MHz.

<sup>6)</sup> Temperature range +5°C to +23°C or +35°C to +45°C and f>2200 MHz: add 0.2 dB.

<sup>7)</sup> Measurement bandwidth: 21.9 kHz.




## General data

Rated temperature range	+5 °C to +45 °C
Storage temperature range	–25 °C to +60 °C
Humidity	+40 °C, 80% rh, non-condensing; complies with IEC 68-2-3
<b>Display</b>	21 cm TFT colour display (8.4")
Resolution	640 x 480 pixels (VGA resolution)
Pixel failure rate	$< 2 \times 10^{-5}$
<b>Electromagnetic compatibility</b>	meets requirements of EMC Directive 89/336/EEC (EN50081-1 and EN50082-2) meets requirements of EN61326-1
<b>Mechanical resistance (non-operating mode)</b>	
Vibration, sinusoidal	meets IEC68-2-6, IEC1010-1, EN61010-1, MIL-T-28800 D class 5, 5 Hz to 150 Hz, max. 2 g at 55 Hz, 55 Hz to 150 Hz, 0.5 g const.
Vibration, random	meets DIN IEC 68-2-36, DIN 40046 T24 10 Hz to 300 Hz, acceleration 1.2 g rms
Shock	meets DIN IEC 68-2-27, MIL-STD-810D 40 g shock spectrum
<b>Electrical safety</b>	IEC1010-1, DIN EN61010-1, UL3111-1, CSA22.2 No. 1010-1
<b>Power supply</b>	100 V to 240 V $\pm 10\%$ (AC), 50 Hz to 400 Hz $-5\%$ to $+10\%$ power factor correction, EN61000-3-2 power consumption, max. 500 VA, base unit 130 W typ with options 180 W typ 465 mm x 193 mm x 517 mm (19"; 4 height units)
<b>Dimensions (W x H x D)</b>	
<b>Weight</b>	
Base unit	14 kg
With typical options	18 kg

## Inputs and outputs (rear panel)

<b>IF3 RX CH1</b>	$Z_{out} = 50 \Omega$ , BNC female, max. level $-2$ dBm, 10.7 MHz
<b>Remote control interfaces</b>	IEC/IEEE bus
	IEC 625-2 (IEEE 488.2) 24-pin Amphenol connector
Serial interface COM1, COM2	RS-232-C (COM), 9-pin sub-D connector
<b>Printer interface LPT</b>	parallel (Centronics compatible), 25-pin sub-D connector
<b>Keyboard</b>	PS/2 connector
<b>External monitor (VGA)</b>	15-pin sub-D connector

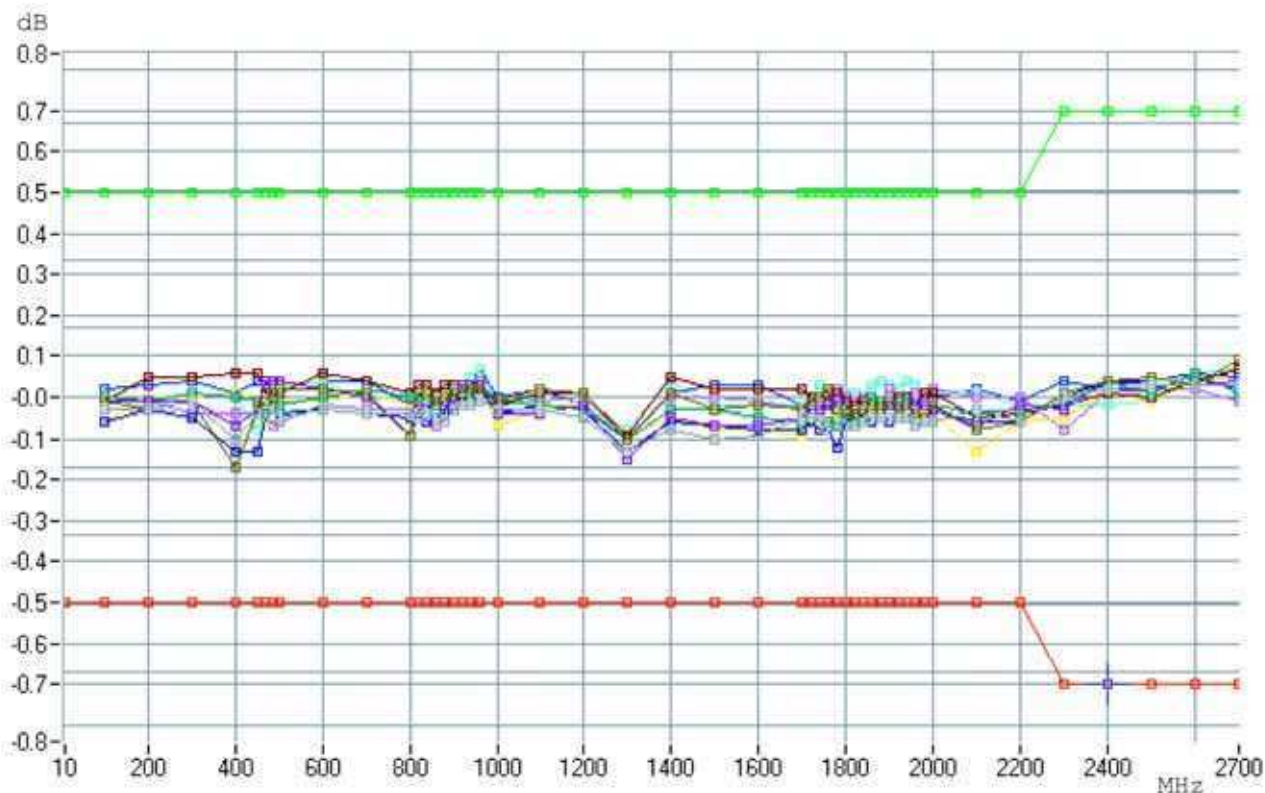

Rohde & Schwarz specifications are a conservative view of what a product has to offer. As an example, this diagram presents the accuracy of the CMU200 frequency-selective power measurement. It is shown here for 10 randomly chosen instruments at 25°C and 0 dBm on RF2 without taking additional measurement uncertainty from the test system itself into account. The tolerances marked above and below (green and red line) indicate the specifications stated in this data sheet's general data section.

# Models and options

## Instruments, options and ordering information

continued on the next page

Type/Option	Description	GSM/GPRS/ EDGE/HSCSD	TDMA	AMPS	cdmaOne	CDMA2000	WCDMA	Bluetooth	Order number
CMU200	Base unit with following accessories: power cord, operating manual, service manual instrument	✓	✓	✓	✓	✓	✓	✓	1100.0008.02
CMU-B11 <sup>1)</sup>	Reference OCXO, aging $2 \times 10^{-7}$ /year. Ensures high absolute accuracy, minimum temperature-dependent drift and especially high long-term stability. Used for measurements with exact frequency stability requirements	☺	☺	☺	☺	☺	☺	☺	1100.5000.02
CMU-B12 <sup>1)</sup>	High-stability OCXO, aging $3.5 \times 10^{-8}$ /year. Oven crystal with highest long-term stability. Ensures compliance with tolerances specified by GSM. Used for highly demanding frequency stability requirements to GSM 11.20	☺	☺	☺	☺	☺	☺	☺	1100.5100.02
CMU-B17	I/Q IF interface	☺	☺	–	–	☺	☺	–	1100.6906.02
CMU-B21	Versatile signalling unit. Provides multistandard signalling hardware	✓	✓	✓	–	–	–	✓	1100.5200.02
CMU-B41	Audio generator and analyzer. Includes audio frequency (AF) generator, voltmeter, distortion meter	☺	☺	✓	–	☺	–	–	1100.5300.02
CMU-B52 <sup>2)</sup>	Internal versatile multimode speech coder/decoder. This option converts digital speech signals into analog signals and vice versa. The option allows separate uplink and downlink audio application measurements on mobile phones.	☺	☺	–	–	–	–	–	1100.5400.02
CMU-B53 <sup>2)13)</sup>	Bluetooth extension	–	–	–	–	–	–	✓	1100.5700.02
CMU-B66 <sup>13)</sup>	Versatile baseband board	–	–	–	–	–	✓	–	1149.9509.02
CMU-B81	cdmaOne signalling unit	–	–	–	✓	–	–	–	1100.6506.02
CMU-B83	CDMA2000 (1x) signalling unit	–	–	–	–	✓	–	–	1150.0301.02
CMU-B99	RF1 level range identical to RF2	☺	☺	☺	☺	☺	☺	☺	1150.1250.02
CMU-U53 <sup>2)6)</sup>	Bluetooth upgrade kit	–	–	–	–	–	–	✓	1100.7302.02
CMU-U61 <sup>14)</sup>	Modification kit: floppy disk drive 3½" instead of PCMCIA	☺	☺	☺	☺	☺	☺	☺	1100.5500.02
CMU-U65	3G measurement DSP	–	–	–	–	✓	✓	–	1100.7402.02
CMU-U66 <sup>13)</sup>	Upgrade kit Versatile baseband board	–	–	–	–	–	✓	–	1149.9609.02
CMU-U83 <sup>13)</sup>	Upgrade kit to CMU-B83 in exchange for CMU-B81	–	–	–	–	✓	–	–	1150.0401.02
CMU-U99 <sup>12)</sup>	Modification kit RF1 level range identical to RF2	☺	☺	☺	☺	☺	☺	☺	1150.1350.02
CMU-K20 <sup>2)7)</sup>	GSM400 mobile station signalling/non-signalling test	✓	–	–	–	–	–	–	1115.5900.02
CMU-K21 <sup>2)7)</sup>	GSM900, R-GSM and E-GSM mobile station signalling/non-signalling test	✓	–	–	–	–	–	–	1115.6007.02
CMU-K22 <sup>2)7)</sup>	GSM1800 (DCS) mobile station signalling/non-signalling test	✓	–	–	–	–	–	–	1115.6107.02
CMU-K23 <sup>2)7)</sup>	GSM1900 (PCS) mobile station signalling/non-signalling test	✓	–	–	–	–	–	–	1115.6207.02
CMU-K24 <sup>2)7)</sup>	GSM850 mobile station signalling/non-signalling test	✓	–	–	–	–	–	–	1115.6307.02
CMU-K27 <sup>2)7)</sup>	IS-136/Cellular (800 MHz band) mobile station signalling/non-signalling test	–	✓	–	–	–	–	–	1115.6607.02
CMU-K28 <sup>2)7)</sup>	IS-136/PCS (1900 MHz band) mobile station signalling/non-signalling test	–	✓	–	–	–	–	–	1115.6707.02
CMU-K29 <sup>3)</sup>	AMPS mobile station signalling/non-signalling test	–	–	✓	–	–	–	–	1115.6807.02
CMU-K42 <sup>11)</sup>	GPRS software extension for all GSM software packages	✓	–	–	–	–	–	–	1115.4691.02
CMU-K53 <sup>2)5)</sup>	Bluetooth test software	–	–	–	–	–	–	✓	1115.5000.02
CMU-K65 <sup>8)</sup>	WCDMA (3GPP/FDD, UL) user equipment TX test, non-signalling	–	–	–	–	–	✓	–	1115.4891.02
CMU-K66 <sup>8)9)</sup>	WCDMA (3GPP/FDD, DL) generator software	–	–	–	–	–	✓	–	1115.5100.02
CMU-K81 <sup>4)7)</sup>	cdmaOne cellular (800 MHz band) mobile station signalling/non-signalling test	–	–	–	✓	–	–	–	1115.5500.02
CMU-K82 <sup>4)7)</sup>	cdmaOne PCS (1700/1900 MHz band) mobile station signalling/non-signalling test	–	–	–	✓	–	–	–	1115.5600.02
CMU-K83 <sup>10)7)</sup>	CDMA2000 (1x) (450 MHz band) mobile station signalling/non-signalling test	–	–	–	–	✓	–	–	1150.3500.02
CMU-K84 <sup>10)7)</sup>	CDMA2000 (1x) (cellular band) mobile station signalling/non-signalling test	–	–	–	–	✓	–	–	1150.3600.02
CMU-K85 <sup>10)7)</sup>	CDMA2000 (1x) (PCS band) mobile station signalling/non-signalling test	–	–	–	–	✓	–	–	1150.3700.02
CMU-K86 <sup>10)7)</sup>	CDMA2000 (1x) (IMT2000 band) mobile station signalling/non-signalling test	–	–	–	–	✓	–	–	1150.3800.02

### Comments on table:

✓ mandatory; ☺ optional; – not applicable

<sup>1)</sup> CMU-B11 or CMU-B12 possible. One of two OCXOs should be installed to ensure high frequency accuracy or external frequency reference may be used, if available.

<sup>2)</sup> CMU-B21 necessary.

<sup>3)</sup> CMU-B21 and CMU-B41 necessary.

<sup>4)</sup> CMU-B81 necessary.

<sup>5)</sup> CMU-B53 necessary.

<sup>6)</sup> For upgrade only if factory installation is not applicable. Includes CMU-B53 and CMU-K53.

<sup>7)</sup> Depending on the required frequency band.

<sup>8)</sup> CMU-U65 necessary.

<sup>9)</sup> CMU-U66 or CMU-B66 necessary.

<sup>10)</sup> CMU-B83 or CMU-U83 necessary.

<sup>11)</sup> At least one of CMU-K20 to K24 necessary.

<sup>12)</sup> Factory installation only.

<sup>13)</sup> For upgrade only if factory installation is not applicable.

<sup>14)</sup> For new units only. Factory installation only.

Type/Option	Description	GSM	TDMA	AMPS	cdmaOne	CDMA2000	WCDMA	Bluetooth	Order number
BW2-C1	Corner cover 1 (2 pieces required)	☺	☺	☺	☺	☺	☺	☺	1096.2593.00
BW2-C2	Corner cover 2 (2 pieces required)	☺	☺	☺	☺	☺	☺	☺	1096.2602.00
CMU-DCV	Documentation of calibration values	☺	☺	☺	☺	☺	☺	☺	0240.2193.08
CRT-Z2	GSM/GPRS test SIM for loopback mode, required for BER and other applications	☺	–	–	–	–	–	–	1039.9005.02
CMU-Z1	30 Mbyte memory card for use with PCMCIA interface	☺	☺	☺	☺	☺	☺	☺	1100.7490.02
CMU-Z6	Enhancement of wideband modulation	–	–	–	–	–	☺	–	1150.0001.02
CMU-Z10	Antenna coupler 900 MHz/1700MHz to 2200MHz	☺	☺	☺	☺	☺	☺	–	1150.0801.02
CMU-Z11	Shielded chamber extension for CMU-Z10	☺	☺	☺	☺	☺	☺	–	1150.1008.02
CMU-Z12	Bluetooth antenna	–	–	–	–	–	–	☺	1150.1043.02
PSM-B9	PCMCIA 500 Mbyte hard disk	☺	☺	☺	☺	☺	☺	☺	1064.5700.02
ZZA-411	19" rack adapter	☺	☺	☺	☺	☺	☺	☺	1096.3283.00

**Comments on table:**

✓ mandatory; ☺ optional; – not applicable



**ROHDE & SCHWARZ**

ROHDE & SCHWARZ GmbH & Co. KG · Mühldorfstraße 15 · 81671 München · Germany · P.O.B. 8014 69 · 81614 München · Germany · Telephone +49 89 4129-0

www.rohde-schwarz.com · Customer Support: Tel. +49 1805124242, Fax +49 89 4129-13777, E-mail: CustomerSupport@rohde-schwarz.com

**www.valuetronics.com**



## Value-added services

- ◆ Rohde&Schwarz offers a wide range of training programs not only on products but also on new technical developments
- ◆ Rohde&Schwarz application engineers help to optimize the use of the CMU200 and the overall performance of your local environment
- ◆ Over 70 representative offices and a tight worldwide network of service and calibration centers ensure Rohde&Schwarz support where you need it

## Quality management at Rohde&Schwarz

Lasting customer satisfaction is our primary objective. The quality management system of Rohde&Schwarz meets the requirements of ISO 9001 and encompasses virtually all fields of activity of the company.

Certified Quality System

# ISO 9001

DQS REG. NO 1954

Certified Environmental System

# ISO 14001

REG. NO 1954

**Basics**  
**Technology**  
**Solutions**  
**GSM** **GPRS**  
**HSCSD**  
**EDGE**

**TDMA**

**AMPS**

**cdmaOne**

**CDMA2000**

**WCDMA**

**Bluetooth**

