


## Spectrum Analyzer Kit - Technician

● **CT3739**

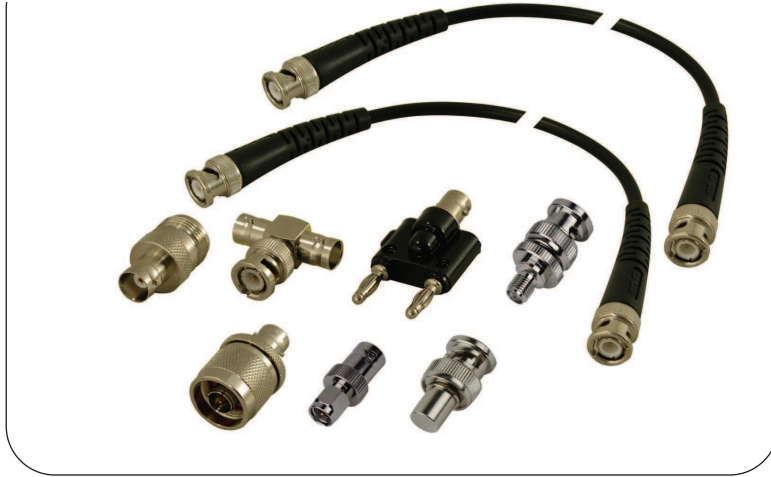

**FEATURES:**

- Analyzers to 3 GHz
- Convenient Interconnection Kit
- High Quality Components
- Gold Plated Contacts
- Storage Pouch

**BASIC INTERCONNECTION KIT FOR RF MEASUREMENTS WITH SPECTRUM ANALYZERS:**

*Cal Test's spectrum analyzer accessory kit, model CT3739, configured for analyzers up to 3 GHz, provide users the necessary interconnection cables and adapters to begin productive work.*

*The kit includes 2, 1-meter BNC cable assemblies, 5 between- and in-series BNC, N-Type and SMA coaxial adapters, and 1 BNC 50Ω terminator, just the right accessories for spectrum analyzer work in design, performance verification or calibration.*

*Model CT3739, Spectrum Analyzer Kit is suitable for instruments from Advantest®, Agilent®, B&K Precision®, Rohde & Schwarz®, Tektronix® and many others. Find the recommended instrument for model CT3739, or Cal Test's others spectrum analyzer kits...*

*CT3740 – Enhanced Spectrum Analyzer Kit – Senior Technician*

*CT3741 – Advanced Spectrum Analyzer Kit – Engineer*

*... at our web site [www.caltestelectronics.com](http://www.caltestelectronics.com).*

**APPLICATIONS:**

- R&D Laboratories
- Production Test Stations
- Service & Repair Facilities
- Educational Test Benches
- RF Field Testing

Specifications and appearance subject to change without notice  
P373900 110408

1 - [www.caltestelectronics.com](http://www.caltestelectronics.com)




**ORDER INFORMATION:**

**CT3739**

Spectrum Analyzer Kit – Technician

**KIT CONTENTS:**

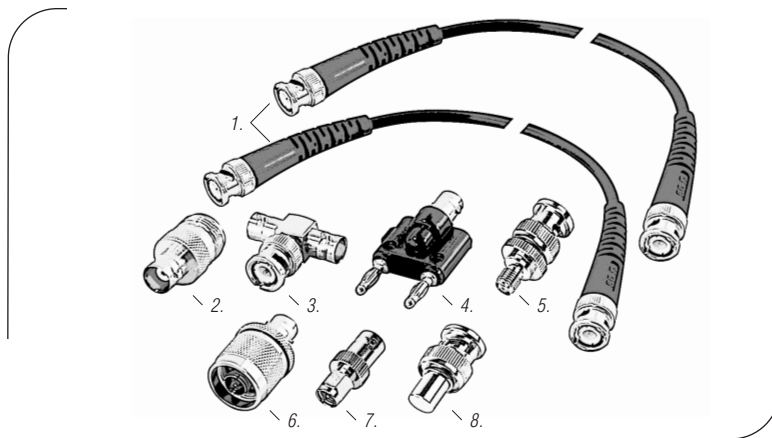

**CONTACT INFO:**

Toll Free: 888-256-2246 (US Only)

Phone: 714-221-9330

Fax: 714-921-9849

22820 Savi Ranch Pkwy

Yorba Linda, CA 92887-4610 USA

www.caltestelectronics.com

Item	Description	Model	Qty.	Frequency Range	VSWR Max.
1.	BNC Cable Assembly, 100cm (40")	CT2942-100	2	DC - 1 GHz	1.20:1 @ 1 GHz
2.	BNC female to N Type female	CT2771	1	DC - 4 GHz	1.30:1 @ 4 GHz
3.	BNC Tee, female-male-female	CT2411	1	DC - 4 GHz	N/A
4.	BNC female to Double Banana Plugs	CT2939	1	N/A	N/A
5.	BNC male to SMA female	CT3328	1	DC - 4 GHz	1.30:1 @ 4 GHz
6.	BNC female to N Type male	CT2762	1	DC - 4 GHz	1.30:1 @ 4 GHz
7.	BNC female to SMA male	CT3387	1	DC - 4 GHz	1.30:1 @ 4 GHz
8.	BNC male Terminator, 50 Ω, 1/2 W	CT3334-50	1	DC - 500 MHz	N/A

**SPECIFICATIONS:**

- Impedance - 50 Ω
- Frequency Range - see table
- VSWR Max - see table
- Working temperature - -20° to +80° C
- Connectors: BNC  
Body - Brass, Nickel Plated  
Dielectric - PTFE & Delrin®  
Center Contact - Brass, Gold Plated

Copyright © 2008, Cal Test Electronics, Inc. All rights reserved. Information in this publication supersedes that in all previously published material. Trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

Specifications and appearance subject to change without notice  
P373900 110408

2 - www.caltestelectronics.com

