Tektronix[®]

TriMode[™] Probe Family

P7500 Series Datasheet



Key features

- TriMode[™] Probe One setup, three measurements without adjusting probe tip connections
 - Differential
 - Single ended
 - Common mode (Requires only one probe vs. conventional probing techniques)
- Signal fidelity
 - 25 GHz P7520A (with P75PST tip)
 - 20 GHz P7520A
 - 16 GHz P7516
 - 13 GHz P7513A
 - 8 GHz P7508
 - 6 GHz P7506
 - 4 GHz P7504


- Versatile connectivity solder down, handheld, fixtured
 - Variety of solder-down options
 - TriMode[™] solder tips
 - Small form factor for high-density probing
 - Bandwidth choices from 4 to 25 GHz
 - 1.5 m extension cable for high-temperature probing
 - Quickly and reliably connect to multiple probe tips
 - Precision Differential Probing Module Optional handheld and fixtured probing
 - Small precision-tapered tips, an articulated joint for compliance, and variable tip spacing
- TekConnect® Interface TekConnect scope/probe control and usability
 - Direct control from probe compensation box or from scope menu
 - Automated measurement control through the TekConnect[®] Interface to connect to Tektronix real-time oscilloscopes
 - View TriMode/attenuation settings on probe compensation box from top or end panel

Applications

- Examples include, but are not limited to:
 - PCI Express, Serial ATA, DDR2/3/4, USB

TriMode probing, connectivity, and performance

TriMode[™] Probing Architecture

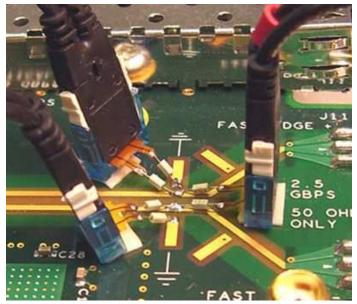


Before TriMode: 1 probe for differential; 2 probes for SE and common mode; or 1 probe soldered and resoldered 3 times; 2 probes for common mode.

One-probe setup makes differential, single ended, and common mode measurements accurately and definitively.

Tektronix is a known leader when it comes to signal fidelity and signal acquisition. Building on our history of market-leading innovations in probing, we invented a revolutionary probing architecture called "TriMode[™] Probing" that defines the next-generation industry benchmark for usability and signal fidelity. This architecture changes the rules of probing and allows you to work more effectively and efficiently. By enabling unique functionality, the P7500 Series TriMode probes allow you to switch between differential, single ended, and common mode measurements without moving the probe from its connection points.

Improved productivity is achieved by reducing setup time. One setup can be used to make the three different types of measurements all with the press of a button. The TriMode Probe architecture for the P7500 Series probes continues the Tektronix tradition of high-bandwidth and low-DUT loading while providing improved connectivity and value.




After TriMode (P75TLRST): 1 probe for differential, single ended, and common mode, with only 1 setup required.

Connectivity Plus – Solder Down – Handheld – Fixtured

The P7500 Series TriMode probe architecture offers various levels of connectivity and provides the highest probe fidelity available for real-time oscilloscopes. The multipoint connectivity solutions of the P7500 Series include:



 $\ensuremath{\text{TriMode Performance Solder Tip}}$ The highest-performance solder tip. Up to 25 GHz bandwidth.



TriMode Long-reach Solder Tip A high performance solder tip with a long reach and very small, low-profile form factor. Up to 20 GHz bandwidth.



TriMode Resistor Solder Tip High-performance solder tip with easy-to-solder tip resistors. Up to 18 GHz bandwidth.



TriMode[™] Long Reach Solder Tip (75 Ω tip resistor) A high performance solder tip for use with memory chip interposers with embedded 100 Ω resistors. Up to 20 GHz bandwidth.




TriMode[™] Long Reach Solder Tip (0 Ω tip resistor) A high performance solder tip for use with memory chip interposers with embedded 175 Ω resistors. Up to 20 GHz bandwidth.



TriMode Extended-resistor Solder Tip Medium-performance solder tip with long easyto-solder tip resistors. Up to 7 GHz bandwidth.

www.valuetronics.com



TriMode Micro-coax Tip Low-cost, quick-connect solder tips. Up to 4 GHz bandwidth.



TriMode High-temperature Tip When used with the 1.5 m Socket Cable XL, this tip can be used in environments from –55 $^{\circ}$ C to 150 $^{\circ}$ C. Up to 10 GHz bandwidth with DSP.



 $\ensuremath{\textbf{Damped}}$ $\ensuremath{\textbf{Wire Tip}}$ Low-cost solder tips ideal for high-density probing. Up to 8 GHz bandwidth.



Precision Differential Probing Module High-performance handheld probing module. Up to 18 GHz bandwidth.

Handheld and fixtured probing needs are met using the optional Precision Differential Probing Module (P75PDPM). Its small precision tapered tips, variable articulation of the probe tip, and quick-adjusting variable tip spacing provides the needed flexibility for adapting to vias and other test points of differing sizes from 30 mils to 180 mils.

These precision connectivity tools enable you to access multiple signals on anything from convenient test pads to hard-to-reach, high-density circuitry.

Signal fidelity

You can be confident in the signal fidelity of your measurements. The innovative new Tektronix differential architecture, coupled with the superior electrical performance of IBM SiGe technology, provides the bandwidth and fidelity to meet the industry needs of today as well as tomorrow.

The P7500 Series Probe architecture provides:

- Highest bandwidth available 25 GHz
- Excellent step response
- Low-DUT loading
- High CMRR
- Differential, single ended, or common mode measurements using one probe

Performance you can count on

Depend on Tektronix to provide you with performance you can count on. In addition to industry-leading service and support, this product comes backed by a one-year warranty as standard.



P7500 with P75PDPM

Specifications

All specifications are typical unless noted otherwise. All specifications apply to all models unless noted otherwise.

Model overview

For additional characteristics, refer to the individual probe Technical Reference Manuals.

| TriMode Probe Architecture | P7520A | P7516 | P7513A | P7508 | P7506 | P7504 |
|---------------------------------------|---|--|--|---|---|---|
| Bandwidth (probe only) | >20 GHz, A-B mode >18 GHz, other modes | >16 GHz | >13 GHz | >8 GHz | >6 GHz | >4 GHz |
| Rise time (10-90%) (probe only) | <pre><27 ps, A-B mode <29 ps, other modes</pre> | <32 ps | <40 ps | <55 ps | <75 ps | <105 ps |
| Rise time (20-80%) (probe only) | <18 ps, A-B mode <20 ps, other modes | <24 ps | <28 ps | <35 ps | <50 ps | <70 ps |
| Attenuation (user selectable) | 5X or 12.5X | 5X or 12.5X | 5X or 12.5X | 5X or 12.5X | 5X or 12.5X | 5X or 12.5X |
| DC gain (guaranteed) | 0.2 ±2% (5X) 0.08 ±2% (12.5X) | 0.2 ±2% (5X) 0.08 ±2% (12.5X) | 0.2 ±2% (5X) 0.08 ±2% (12.5X) | 0.2 ±2% (5X) 0.08 ±2% (12.5X) | 0.2 ±2% (5X) 0.08 ±2% (12.5X) | 0.2 ±2% (5X) 0.08 ±2% (12.5X) |
| Differential input range | ±0.625 V (5X) ±1.6 V (12.5X) | ±0.75 V (5X) ±1.75 V (12.5X) | ±0.75 V (5X) ±1.75 V (12.5X) | ±0.75 V (5X) ±1.75 V (12.5X) | ±0.75 V (5X) ±1.75 V (12.5X) | ±0.75 V (5X) ±1.75 V (12.5X) |
| Operating voltage window | +3.7 to -2.0 V | +4.0 to -2.0 V | +4.0 to -2.0 V | +4.0 to -2.0 V | +4.0 to -2.0 V | +4.0 to -2.0 V |
| Offset voltage range | +2.5 to -1.5 V, A-B mode +3.4 to -1.8 V, other modes | +2.5 to -1.5 V, A-B mode +3.4 to -1.8 V, other modes | +2.5 to -1.5 V, A-B mode +3.4 to -1.8 V, other modes | +2.5 to -1.5 V, A-B mode +3.4 to -1.8 V, other modes | +2.5 to -1.5 V, A-B mode +3.4 to -1.8 V, other modes | +2.5 to -1.5 V, A-B mode +3.4 to -1.8 V, other modes |
| DC input resistance (differential) | 100k ohms | 100k ohms | 100k ohms | 100k ohms | 100k ohms | 100k ohms |
| Noise | <33 nV / √Hz (5X) <48 nV / √Hz (12.5X) | <33 nV / √Hz (5X) <48 nV / √Hz (12.5X) | <33 nV / √Hz (5X) <48 nV / √Hz (12.5X) | <33 nV / √Hz (5X) <48 nV / √Hz (12.5X) | <33 nV / √Hz (5X) <48 nV / √Hz (12.5X) | <33 nV / √Hz (5X) <48 nV / √Hz (12.5X) |
| CMRR (Differential mode) | >60 dB at DC >40 dB at 50 MHz >30 dB at 1 GHz >20 dB at 10 GHz >12 dB at 20 GHz | >60 dB at DC >40 dB at 50 MHz >30 dB at 1 GHz >20 dB at 8 GHz >15 dB at 16 GHz | >60 dB at DC >40 dB at 50 MHz >30 dB at 1 GHz >20 dB at 7 GHz >15 dB at 13 GHz | >60 dB at DC >40 dB at 50 MHz >30 dB at 1 GHz >25 dB at 4 GHz >20 dB at 8 GHz | >60 dB at DC >40 dB at 50 MHz >30 dB at 1 GHz >25 dB at 3 GHz >20 dB at 6 GHz | >60 dB at DC >40 dB at 50 MHz >30 dB at 1 GHz >28 dB at 2 GHz >25 dB at 4 GHz |
| Nondestructive input range | ±15 V | ±15 V | ±15 V | ±15 V | ±15 V | ±15 V |
| Interface | TekConnect™ | TekConnect™ | TekConnect™ | TekConnect™ | TekConnect™ | TekConnect™ |
| Cable length | 1 meter | 1 meter | 1.3 meters | 1.3 meters | 1.3 meters | 1.3 meters |

Minimum system requirements/ instrument compatibility

P7500 Series TriMode Differential Probes are compatible with the DPO/DSA/MSO70000 and TDS6000B/C Series TekConnect Oscilloscopes. The chart below shows recommended probe/oscilloscope model combinations.

| Instrument | BW (scope) | FW version | Recommended probe |
|----------------|------------|------------------|-------------------|
| MSO/DPO73304DX | 33 GHz | V6.4.1 or higher | P7520A |
| MSO/DPO72504DX | 25 GHz | V6.4.1 or higher | P7520A |
| MSO/DPO72304DX | 23 GHz | V3.0 or higher | P7520A |
| DPO/DSA71604 | 16 GHz | V3.0 or higher | P7516 |
| DPO/DSA71254 | 12.5 GHz | V3.0 or higher | P7513A |
| DPO/DSA70804 | 8 GHz | V3.0 or higher | P7508 |

6 www.tek.com

www.valuetronics.com

TriMode[™] Probe Family - P7500 Series Datasheet

Minimum system requirements/ instrument compatibility

| Instrument | BW (scope) | FW version | Recommended probe |
|-----------------------------------|------------------|----------------|-------------------------|
| DPO/DSA70604 | 6 GHz | V3.0 or higher | P7506 |
| DPO/DSA70404 | 4 GHz | V3.0 or higher | P7504 |
| TDS6000C | 12.5 GHz, 15 GHz | V5.1.7 | P7516, P7513A |
| TDS6000B | 8 GHz, 6 GHz | V5.1.3 | P7508, P7506 |
| 80A03 TekConnect Probe Interface | | V2.3 | All P7500 Series probes |
| RTPA2A TekConnect Probe Interface | | V2.3 | All P7500 Series probes |

Typical system specifications

The typical system specifications in the table below are achieved using a P7520A probe with a DPO/DSA72504D or DPO/DSA73304D oscilloscope and a P75PST solder tip.

| Characteristic | A-B mode | All other modes | |
|------------------------------|----------|-----------------|--|
| System bandwidth | 25 GHz | >18 GHz | |
| System rise time (10% – 90%) | <20 ps | <29 ps | |
| System rise time (20% – 80%) | <14 ps | <20 ps | |

Ordering information

Models

All Include: One-year warranty, plus see Standard Accessories table.

| P7520A | TriMode™ Differential Probe, 20 GHz, for TekConnect Interface Oscilloscopes. |
|--------|--|
| P7516 | TriMode [™] Differential Probe, 16 GHz, for TekConnect Interface Oscilloscopes. |
| P7513A | TriMode™ Differential Probe, 13 GHz, for TekConnect Interface Oscilloscopes. |
| P7508 | TriMode [™] Differential Probe, 8 GHz, for TekConnect Interface Oscilloscopes. |
| P7506 | TriMode [™] Differential Probe, 6 GHz, for TekConnect Interface Oscilloscopes. |
| P7504 | TriMode [™] Differential Probe, 4 GHz, for TekConnect Interface Oscilloscopes. |

Service options

| Option | Description |
|--------|---|
| CA1 | Single Calibration or Functional Verification |
| C3 | Calibration Service 3 Years |
| C5 | Calibration Service 5 Years |
| D3 | Calibration Data Report 3 Years (with Option C3) |
| D5 | Calibration Data Report 5 Years (with Option C5) |
| G3 | Complete Care 3 Years (includes loaner, scheduled calibration and more) |
| G5 | Complete Care 5 Years (includes loaner, scheduled calibration and more) |
| R3 | Repair Service 3 Years |
| R5 | Repair Service 5 Years |

Additional service products available during warranty (DW)

| Product number | Description |
|----------------|--|
| | Repair service coverage 3 years (includes product warranty period). 3-year period starts at time of customer instrument purchase |
| R5PDW | Repair service coverage 5 years (includes product warranty period). 5-year period starts at time of customer instrument purchase |

Standard accessories

| Description | P7520A/P7516 | P7513A/P7508 | P7506/P7504 | Reorder part number |
|---|-------------------------|--------------|-------------|---|
| The documentation kit contains: Printed Quick Start User Manuals, CD-ROM contains PDFs of basic probe and measurement literature, and the probe manuals (Quick Start User Manual and Technical Reference Manual) | 1 each ¹ | 1 each | 1 each | 020-2790-xx (P7516/P7513A/P7508) 020-2977-xx (P7506/P7504) 071-3048-xx (P7520A) |
| Antistatic Wrist Strap | 1 each | | | 006-3415-xx |
| Certificate of Traceable Calibration | 1 each | 1 each | 1 each | Standard with probe |
| Data Calibration Report: Lists the manufacturing test results of your probe at the time of shipment and is included with every probe | 1 each | 1 each | 1 each | Standard with probe |
| DC Probe Calibration Fixture | 1 each | | | 067-1821-xx |
| DC Probe Calibration Fixture | | 1 each | 1 each | 067-1967-xx |
| 50 Ω Coax Cable – Male BNC to Male BNC | 1 each | 1 each | 1 each | 012-0208-xx |
| 50 Ω Coax Cable – Male SMA to Male SMA | 1 each | 1 each | 1 each | 174-1120-xx |
| Solder Tip Ramps (25 each) | 1 each (P7520A only) | | | 020-3118-xx |
| P7520A/P7516/P7513A/P7508 Accessory Box (See contents listing I | below 1 through 7) | 1 | | |
| 1) TriMode Long-reach Solder Tip | 2 each | 2 each | | P75TLRST |
| 2) G3PO Bullet Kit (includes 4 bullets) | 1 each | | | 013-0359-xx |
| 3) G3PO Bullet Removal Tool | 1 each | | | 003-1896-xx |
| 4) Solder Kit: Solder Spool, Wire Spool | 1 each | 1 each | | 020-2754-xx |
| 5) Tape, Adhesive (Strip, 10 each) | 1 each | 1 each | | 006-8237-xx |
| 6) Marker Band Set (2 each of 5 colors) | 1 each | 1 each | | 016-0633-xx |
| 7) Socket Cable | | 1 each | | 020-2954-xx |
| P7506/P7504 Accessory Box (See contents listing below 1 through 6 |) | | | |
| 1) Socket Cable | | | 1 each | 020-2954-xx |
| 2) TriMode Micro-coax Tip | | | 4 each | 020-2955-xx |
| 3) TriMode High-temperature Tip | | | 2 each | 020-2958-xx |
| 4) Solder Kit: Solder Spool, Wire Spool | | | 1 each | 020-2754-xx |
| 5) Tape, Adhesive (Strip, 10 each) | | | 1 each | 006-8237-xx |
| 6) Marker Band Set (2 each of 5 colors) | | | 1 each | 016-0633-xx |

¹ P7520A documentation is a printed instruction manual.

Optional tip accessories

| Description | Part number | | |
|--|--------------------------|--|--|
| TriMode Performance Solder Tip | P75PST | | |
| P7500 Series Precision Differential Probing Module P7500 Precision Differential Probing Module Accessory Kit (See 1 through 7 below) | P75PDPM | | |
| 1) Tip Cable (1 ps matched pair, 1 each) | P75TC | | |
| 2) Probing Module Tip Probe Tips Replacement Kit 1 Each (Right and left side) | P75PMT | | |
| 3) Accessory Kit; Ground Spring, Large 4 Each | 016-1998-xx | | |
| 4) Accessory Kit; Ground Spring, Small 4 Each | 016-1999-xx | | |
| 5) Handle, Adapter (Probing Module) | 367-0545-xx | | |
| 6) G3PO Separator Tool | 003-1897-xx | | |
| 7) Ground Spring Tool | 003-1900-xx | | |
| TriMode Resistor Solder Tip | 020-2936-xx | | |
| TriMode Extended-resistor Solder Tip | 020-2944-xx | | |
| TriMode [™] Long Reach Solder Tip (20 GHz, 75 Ω tip resistor) | 020-3131-xx | | |
| TriMode [™] Long Reach Solder Tip (20 GHz, 0 Ω tip resistor) | 020-3135-xx | | |
| Resistor Replacement Kit | 020-2937-xx | | |
| Solder Tip Ramps, 25 Each | 020-3118-xx | | |
| Socket Cable | 020-2954-xx | | |
| Socket Cable, XL | 020-2960-xx | | |
| TriMode High-temperature Tip | 020-2958-xx | | |
| TriMode Micro-coax Tip | 020-2955-xx | | |
| Damped Wire Tip | 020-2959-xx | | |
| Nexus Interposer DDR Solder Tip (4 GHz, 75 Ω tip resistor) | 020-3022-xx | | |
| Deskew Fixture | 067-1586-xx | | |
| Probe Positioner | PPM100 | | |
| Precision, 3 Position, Probe Positioner | PPM203B | | |
| 8200 Series TekConnect® Probe Interface | 80A03 (FW Version ≥2.3) | | |
| RTSA Series TekConnect [®] Probe Interface | RTPA2A (FW Version ≥2.3) | | |



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.



Product(s) complies with IEEE Standard 488.1-1987, RS-232-C, and with Tektronix Standard Codes and Formats.

TriMode[™] Probe Family - P7500 Series Datasheet

Datasheet

ASEAN / Australasia (65) 6356 3900 Belgium 00800 2255 4835* Central East Europe and the Baltics +41 52 675 3777 Finland +41 52 675 3777 Hong Kong 400 820 5835 Japan 81 (3) 6714 3010 Middle East, Asia, and North Africa +41 52 675 3777 People's Republic of China 400 820 5835 Republic of Korea +822 6917 5084, 822 6917 5080 Spain 00800 2255 4835* Taiwan 886 (2) 2656 6688 Austria 00800 2255 4835* Brazil +55 (11) 3759 7627 Central Europe & Greece +41 52 675 3777 France 00800 2255 4835* India 000 800 650 1835 Luxembourg +41 52 675 3777 The Netherlands 00800 2255 4835* Poland +41 52 675 3777 Russia & CIS +7 (495) 6647564 Sweden 00800 2255 4835* United Kingdom & Ireland 00800 2255 4835* Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777 Canada 1 800 833 9200 Denmark +45 80 88 1401 Germany 00800 2255 4835* Italy 00800 2255 4835* Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90 Norway 800 16098 Portugal 80 08 12370 South Africa +41 52 675 3777 Switzerland 00800 2255 4835* USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tek.com.

Copyright [©] Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

31 Jan 2020 51W-20271-16

S)

www.tek.com

Tektronix[®]