## Tektronix<sup>®</sup>

## **Digital Phosphor Oscilloscopes**

### TDS3000C Series Datasheet



The TDS3000C Series provides you with the performance you need at a price you can afford. Bandwidths range from 100 MHz to 500 MHz, with up to 5 GS/s sample rates for accurate representation of your signal.

#### **Notice to EU customers**

This product is not updated to comply with the RoHS 2 Directive 2011/65/ EU and will not be shipped to the EU. Customers may be able to purchase products from inventory that were placed on the EU market prior to July 22, 2017 until supplies are depleted. Tektronix is committed to helping you with your solution needs. Please contact your local sales representative for further assistance or to determine if alternative product(s) are available. Tektronix will continue service to the end of worldwide support life.

#### Key performance specifications

- 100 MHz, 300 MHz, and 500 MHz bandwidth models
- 2 or 4 analog channel models
- Sample rates up to 5 GS/s real time on all channels
- 10k record length on all channels
- 3,600 wfms/s continuous waveform capture rate
- Suite of advanced triggers

#### **Key features**

- Front-panel USB host port for easy storage and transfer of measurement data
- 25 automatic measurements

- FFT standard
- Multiple language user interface
- WaveAlert® automatic waveform anomaly detection
- TekProbe® interface supports active, differential, and current probes for automatic scaling and units

#### Portable design

- Lightweight design (only 7 lb./3.2 kg) for easy transport
- Optional internal battery operation provides up to three hours without line power

#### Application modules for specialized analysis

- Advanced analysis module
- Limit testing module
- Telecommunications mask testing module
- Extended video module

#### **Applications**

- Digital design and debug
- Video installation and service
- Power supply design
- Education and training
- Telecommunications mask testing
- Manufacturing test
- General bench testing


# DPOs provide greater level of insight into complex signals

The TDS3000C Series offers fast waveform capture rates on a continuous basis that save you time by quickly revealing the nature of faults, so advanced triggers can be applied to isolate them.


Real-time intensity grading highlights the details about the history of a signal's activity, making it easier to understand the characteristics of the waveforms you've captured. Unlike other comparable oscilloscopes, the history remains even after the acquisition has been stopped.

# Quickly debug and characterize signals with DRT sampling technology and sin (x)/x interpolation


The TDS3000C Series combines unique digital real-time (DRT) sampling technology with  $\sin(x)/x$  interpolation to allow you to accurately characterize a wide range of signal types on all channels simultaneously. With the TDS3000C Series there is no change in sampling rate when additional channels are turned on, unlike other comparable oscilloscopes. This sampling technology makes it possible to capture high-frequency information, such as glitches and edge anomalies, that elude other oscilloscopes in its class, while  $\sin(x)/x$  interpolation ensures precise reconstruction of each waveform.

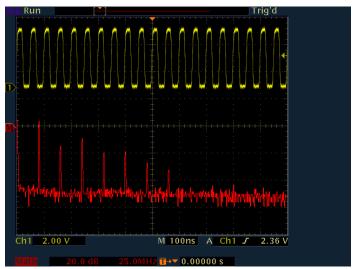

Look for unintentional circuit noise with the TDS3000C series' FFT capability.

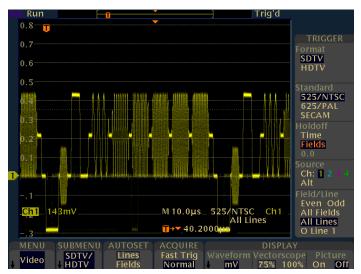


Custom video triggering allows the TDS3000C Series to trigger on standards such as RS-343 ( $26.2~\mathrm{kHz}$  scan rate).

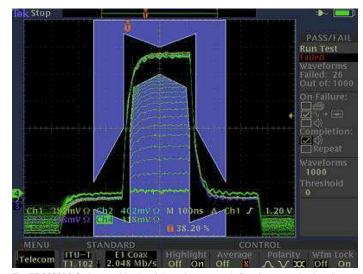


The TDS3000C Series provides breakthrough test speeds for telecommunications line card testing. The telecom QUICKMENU puts all the commonly used telecom test functions on a single menu.

#### Easy to setup and use


When working under tight deadlines, you need your oscilloscope to be intuitive; you want to minimize time spent learning and relearning how to use it. The TDS3000C Series oscilloscopes help reduce your learning curve. Simple navigation and dedicated front-panel controls get you to where you want to be quickly, so that you spend less time learning and more time on the task at hand.

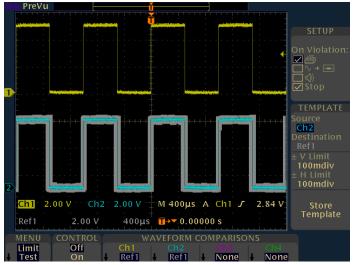

The TDS3000C series with the TDS3LIM module is ideal for manufacturing test applications where fast Go/No-Go decisions are required.

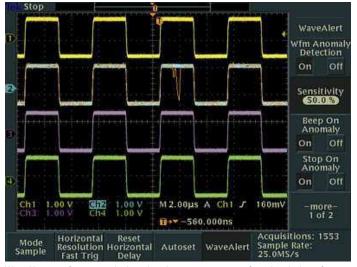

WaveAlert waveform anomaly detection alerts you to any waveform that deviates from the "normal" input such as the glitch on channel 2.

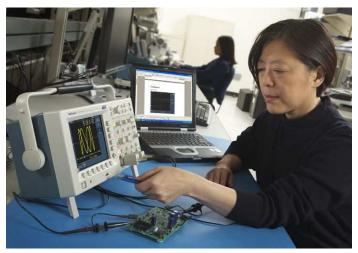

Easily transfer, document, and analyze data on your PC.

#### Simple documentation and analysis

The TDS3000C Series comes equipped with a USB host port so you can easily store and transfer measurement information to your PC.

OpenChoice® PC Communication Software allows you to simply pull screen images and waveform data into a standalone desktop application or directly into Microsoft Word and Excel.

If you prefer not to use a PC for analysis, the TDS3000C Series comes standard with 25 automatic measurements, waveform add, subtract, divide. and multiply math functions, and Fast Fourier Transform (FFT). Unlike other comparable oscilloscopes, the TDS3000C Series math and measurement allows you to use the full acquisition record length or isolate a specific occurrence within an acquisition.

#### Instrument control

Utilizing the built-in ethernet port, e\*Scope web-based remote control allows you to a control TDS3000C series oscilloscope from anywhere, using the internet and your PC.

#### Work where you need to

The TDS3000C Series packs the power of a DPO in a compact design that is only 5.9 in. (149 mm) deep, freeing up valuable benchtop space. And when you need to move your oscilloscope to another lab, its portable 7 lb. (3.2 kg) design makes for easy transport.

If your work demands even more mobility, then the optional battery pack will give you up to three hours of operation without line power.



TDS3BATC provides you with up to three hours of portable battery operation.

## **Specifications**

All specifications are guaranteed unless noted otherwise. All specifications apply to all models unless noted otherwise.

	TDS3012C	TDS3014C	TDS3032C	TDS3034C	TDS3052C	TDS3054C
Input channels	2	4	2	4	2	4
Bandwidth	100 MHz	100 MHz	300 MHz	300 MHz	500 MHz	500 MHz
Rise time (typical)	3.5 ns	3.5 ns	1.2 ns	1.2 ns	0.7 ns	0.7 ns
Sample rate on each channel	1.25 GS/s	1.25 GS/s	2.5 GS/s	2.5 GS/s	5 GS/s	5 GS/s
Record length	10 kpoints	1	1			- 1

#### **Vertical system**

Hardware bandwidth limits	TDS3012C	TDS3014C	TDS3032C	TDS3034C	TDS3052C	TDS3054C
	20 MHz	20 MHz	20 MHz, 150 MHz	20 MHz, 150 MHz	20 MHz, 150 MHz	20 MHz, 150 MHz
Input coupling	AC, DC, GND					
Input impedance	1 MΩ in parallel w	vith 13 pF or 50 Ω				
Input sensitivity range						
1 ΜΩ	1 mV/div to 10 V/	1 mV/div to 10 V/div				
50 Ω	1 mV/div to 1 V/div					
Vertical resolution	9 bits					
Maximum input voltage						
1 ΜΩ	150 V <sub>RMS</sub> with peaks at ≤400 V					
50 Ω	5 V <sub>RMS</sub> with peaks	s at ≤30 V				

#### Vertical system

DC gain accuracy	±2%
Position range	±5 div

#### Horizontal system

Seconds/division range	TDS3012C	TDS3014C	TDS3032C	TDS3034C	TDS3052C	TDS3054C
	4 ns to 10 s	4 ns to 10 s	2 ns to 10 s	2 ns to 10 s	1 ns to 10 s	1 ns to 10 s

Time base accuracy ±20 ppm over any 1 ms time interval

#### **Trigger system**

Trigger modes	Auto (supports Roll Mode for 40 ms/div and slower), Normal, Single Sequence		
B trigger	Trigger after time or events		
Trigger after time range	13.2 ns to 50 s		
Trigger after events range	1 to 9,999,999 events		
Trigger types			
Edge	Conventional level-driven trigger. Positive or negative slope on any channel. Coupling selections: AC, DC, Noise Reject, HF Reject, LF Reject		
Video	Trigger on all lines or individual lines, odd/even or all fields on NTSC, PAL, SECAM		

Extended video Trigger on specific lines in broadcast and non-broadcast (custom) standards and on analog HDTV formats (1080i, 1080p, 720p,

480p). Requires TDS3VID application module

Pulse width (or glitch) Trigger on a pulse width <, >, =, ≠ to a selectable time limit ranging from 39.6 ns to 50 s

Trigger on a pulse that crosses one threshold but fails to cross a second threshold before crossing the first again Rise/fall time Trigger on pulse edge rates that are either faster or slower than a set rate. Edges can be rising, falling, or either

Pattern Specifies AND, OR, NAND, NOR when true or false for a specific time

State Any logic state. Triggerable on rising or falling edge of a clock. Logic triggers can be used on combinations of 2 inputs (not 4) Provides isolated pulse triggering required to perform DS1/DS3 telecommunications mask testing per ANSI T1.102 standard. Comm

Requires TDS3TMT application module

Alternate Sequentially uses each active channel as a trigger source

#### **Acquisition system**

DPO	Captures and displays complex waveforms, random events and subtle patterns in actual signal behavior. DPOs provide 3 dimensions of signal information in real time: Amplitude, time, and the distribution of amplitude over time
Sample	Sample data only
Average	Waveform averaged, selectable from 2 to 512
Envelope	Min-max values acquired over one or more acquisitions
Peak detect	High-frequency and random glitch capture. Captures glitches as narrow as 1 ns (typical) using acquisition hardware at all time base settings

#### **Datasheet**

A	! . ! 4 !	
ACQ	luisition	system

WaveAlert <sup>®</sup>	Monitors the incoming signals on all channels and alerts the user to any waveform that deviates from the normal waveform being acquired
Single sequence	Use the Single Sequence button to capture a single triggered acquisition sequence at a time
Waveform measureme	nts
Cursors	Amplitude, time
Automatic measurements	Display any four measurements from any combination of waveforms. Or display all measurements with measurement snapshot feature. Measurements include Period, Frequency, +Width, -Width, Rise time, Fall time, +Duty cycle, -Duty cycle, +Overshoot, High, Low, Max, Min, Peak-to-peak, Amplitude, Mean, Cycle mean, RMS, Cycle RMS, Burst width, Delay, Phase, Area <sup>1</sup> , Cycle

#### **Measurement statistics** Mean, Min, Max, Standard deviation. Requires TDS3AAM application module

Area 1

**Thresholds** User-definable thresholds for automatic measurements; settable in percent or voltage

Gating Isolate a specific occurrence within an acquisition to take measurements, using either the screen or cursors

#### Waveform math

Arithmetic	Add, subtract, multiply, and divide waveforms
FFT	Spectral magnitude. Set FFT vertical scale to Linear RMS or dBV RMS, and FFT window to Rectangular, Hamming, Hanning, or Blackman-Harris
Advanced math	Integrate, differentiate, define extensive algebraic expressions including analog waveforms, math functions, scalars, up to two user-adjustable variables and results of parametric measurements. For example: (Intg (Ch1-Mean(Ch1)) × 1.414 × VAR1) <sup>2</sup>

#### **Waveform processing**

Autoset	Single-button, automatic setup of all channels for vertical, horizontal and trigger systems, with undo autoset
Deskew	Channel-to-channel deskew ±10 ns may be manually entered for better timing measurements and more accurate math waveforms

#### Display system

Display type	6.5 in. (165.1 mm) liquid-crystal TFT color display
Display resolution	640 horizontal × 480 vertical pixels (VGA)
Interpolation	Sin(x)/x
Waveform styles	Dots, vectors, variable persistence, infinite persistence
Graticules	Full, grid, crosshair, and frame. NTSC, PAL, SECAM, and vectorscope (100% and 75% color bars) with optional TDS3VID application module
Format	YT, XY, and Gated XYZ (XY with Z-axis blanking available on 4-channel instruments only)

Requires TDS3AAM application module.

<sup>2</sup> Requires TDS3AAM application module.

#### Input/output ports

Ethernet port	RJ-45 connector, supports 10Base-T LAN
USB port	Front-panel USB 2.0 host port. Supports USB flash drive
GPIB port	Full talk/listen modes, setting and measurements.  (Optional with TDS3GV Communications Module)
RS-232C port	DB-9 male connector, full talk/listen modes; control of all modes, settings and measurements  Baud rates up to 38,400  (Optional with TDS3GV Communications Module)
VGA video	DB-15 female connector, monitor output for direct display on large VGA-equipped monitors  (Optional with TDS3GV communications module)
External trigger input	BNC connector, input impedance >1 M $\Omega$ in parallel with 17 pF; max input voltage is 150 $V_{RMS}$

#### **Power source**

AC line power

Source voltage 100  $V_{RMS}$  to 240  $V_{RMS}$  ±10% Source frequency 45 Hz to 440 Hz from 100 V to 120 V 45 Hz to 66 Hz from 120 V to 240 V

Power consumption 75 W maximum

Requires TDS3BATC, rechargeable lithium ion battery pack **Battery power** 

Operating time, typical 3 hours

#### **Physical characteristics**

ь.							
Di	m	е	n	S	ĺΟ	n	S

	mm	inches
Width	375.0	14.8
Height	176.0	6.9
Depth	149.0	5.9

Weight

	kg	lb.
Instrument only	3.2	7.0
with accessories	4.5	9.8

Package dimensions

	mm	inches
Width	502.0	19.8
Height	375.0	14.8
Depth	369.0	14.5

Rackmount (RM3000)

	mm	inches
Width	484.0	19.0
Height	178.0	7.0
Depth	152.0	6.0

#### **Datasheet**

#### EMC, environment and safety

Temperature
-------------

Operating 0 °C to +50 °C -40 °C to +71 °C Non-operating Humidity (Operating and non-operating) At or below +30 °C Up to 95% RH +30 °C up to +50 °C Up to 45% RH Altitude Operating To 3,000 meters Non-operating 15,000 meters Electromagnetic compatibility Meets or exceeds EN61326 Class A, Annex D radiated and conducted emissions and immunity; EN6100-3-2 AC Powerline Harmonic Emissions; EN6100-3-3 Voltage Changes, Fluctuation, and Flicker; FCC 47 CFR, Part 15, Subpart B, Class A;

# Ordering information

#### **TDS3000C family**

Safety

 TDS3012C
 100 MHz, 2 channels, 1.25 GS/s

 TDS3014C
 100 MHz, 4 channels, 1.25 GS/s

 TDS3032C
 300 MHz, 2 channels, 2.5 GS/s

 TDS3034C
 300 MHz, 4 channels, 2.5 GS/s

 TDS3052C
 500 MHz, 2 channels, 5 GS/s

 TDS3054C
 500 MHz, 4 channels, 5 GS/s

Australian EMC framework

UL61010B-1, CSA1010.1, IEC61010-1, EN61010-1

Please specify a language option and a power plug option from the lists that follow.

#### Standard accessories

#### **Probes**

P6139B 500 MHz 10x passive probe, one per channel

#### Accessories

Front protective cover

Accessory tray

**Documentation CD** Contains User Manuals in all languages

Front panel overlay Translated front panel overlay. Specify language option.

Installation and Safety Manual

Power cord Specify power plug option.

OpenChoice® PC connectivity

software

Enables fast and easy communication between Windows PC and the TDS3000C Series through LAN, GPIB, or RS-232. Transfer

and save settings, waveforms, measurements, and screen images

Traceable Certificate of Calibration NIM/NIST

#### Warranty

Three year warranty covering all labor and parts, excluding probes and accessories

#### Instrument options

#### Power plug options

Opt. A0 North America power plug (115 V, 60 Hz) Opt. A1 Universal Euro power plug (220 V, 50 Hz) Opt. A2 United Kingdom power plug (240 V, 50 Hz)

Opt. A3 Australia power plug (240 V, 50 Hz)

Opt. A4 North America power plug (240 V, 50 Hz) Opt. A5 Switzerland power plug (220 V, 50 Hz) Opt. A6 Japan power plug (100 V, 50/60 Hz)

Opt. A10 China power plug (50 Hz) Opt. A11 India power plug (50 Hz) Opt. A12 Brazil power plug (60 Hz)

Opt. A99 No power cord

#### **Datasheet**

#### Language options

Opt. L0 English manual Opt. L1 French manual Opt. L2 Italian manual Opt. L3 German manual Opt. L4 Spanish manual Opt. L5 Japanese manual Opt. L6 Portuguese manual Opt. L7 Simplified Chinese manual Traditional Chinese manual Opt. L8 Opt. L9 Korean manual

Language options include translated front-panel overlay for the selected language(s).

Russian manual

No manual

#### **Service options**

Opt. L10

Opt. L99

Available at time of purchase		
Opt. D1	Calibration data report	
Opt. R5	Repair service - 5 year	

Available after purchase	
TDS30xxC-R5DW	Repair service coverage 5 years (includes product warranty period); 5-year period starts at time of customer instrument purchase

#### Recommended accessories

#### **Probes**

ADA400A 100x, 10x, 1x, 0.1x high-gain differential amplifier

**P5100A** 2.5 kV, 100x high-voltage passive probe

P5205A 1.3 kV, 100 MHz high-voltage differential probe
P5210A 5.6 kV, 50 MHz high-voltage differential probe

P6243 1 GHz, ≤1 pF input C 10x active probe

TCP202A 50 MHz, 15 A AC/DC current probe

TCP30315 MHz, 150 A current probe 3TCP305A50 MHz, 50 A current probe 3TCP312A100 MHz, 30 A current probe 3

TCPA300 100 MHz probe amplifier

<sup>3</sup> Requires TCPA300 probe amplifier.

TCPA400 50 MHz probe amplifier

TCP404XL 2 MHz, 500 A current probe 4

**Accessories** 

TDS3GV GPIB, VGA, RS-232 interface

TDS3AAM Advanced Analysis Module. Adds extended math capability, arbitrary math expressions, measurement statistics, and additional

automated measurements

TDS3LIM Limit Testing Module. Adds custom waveform limit testing capabilities

TDS3TMT Telecom Mask Testing Module. Adds pass/fail compliance of ITU-T G.703 and ANSI T1.102 standards, custom mask testing, and

TDS3VID Extended Video Analysis Module. Adds video quickmenu, autoset, hold, line count trigger, video picture mode, vectorscope 5

mode, HDTV format trigger graticules, and more

**TDS3BATC** Lithium-ion battery pack for up to 3 hours continuous operation without line power

TDS3ION Battery charger

AC3000 Soft case for carrying instrument

**HCTEK4321** Hard plastic case for carrying instrument

(requires AC3000)

RM3000 Rackmount kit

071-2507-xx Service manual (English only)



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.



Product(s) complies with IEEE Standard 488.1-1987, RS-232-C, and with Tektronix Standard Codes and Formats.

Requires TCPA400 probe amplifier.

Vectorscope does not support composite video.

ASEAN / Australasia (65) 6356 3900 Belgium 00800 2255 4835\* Central East Europe and the Baltics +41 52 675 3777 Finland +41 52 675 3777 Hong Kong 400 820 5835 Japan 81 (3) 6714 3010 Middle East, Asia, and North Africa +41 52 675 3777 People's Republic of China 400 820 5835 Republic of Korea +822 6917 5084, 822 6917 5080 Spain 00800 2255 4835\* Taiwan 886 (2) 2656 6688

Austria 00800 2255 4835\*
Brazil +55 (11) 3759 7627
Central Europe & Greece +41 52 675 3777
France 00800 2255 4835\*
India 000 800 650 1835
Luxembourg +41 52 675 3777
The Netherlands 00800 2255 4835\*
Poland +41 52 675 3777
Russia & CIS +7 (495) 6647564
Sweden 00800 2255 4835\*
United Kingdom & Ireland 00800 2255 4835\*

Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Canada 1 800 833 9200
Denmark +45 80 88 1401
Germany 00800 2255 4835\*
Italy 00800 2255 4835\*
Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90
Norway 800 16098
Portugal 80 08 12370

South Africa +41 52 675 3777 Switzerland 00800 2255 4835\*

USA 1 800 833 9200

\* European toll-free number. If not accessible, call: +41 52 675 3777

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tek.com.

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

27 Mar 2017 41W-12482-26

www.tek.com

